

- 1. General Policy**
 - 1.1. Window Policy
 - 1.2. Refrigerator Policy
 - 1.3. Lighting Policy
 - 1.4. Room Air Conditioners
- 2. Screen by Screen Instructions**
 - 2.1. NEAT
 - 2.2. MHEA
 - 2.3. EA-QUIP
- 3. Compliance Review**

1. General Policy

The United States Department of Energy (USDOE) Weatherization Assistance Program has sponsored the development of a database computer software tool to help weatherization authorities make decisions about the cost effectiveness of individual energy conservation measures. Separate audit methods were developed for site-built residential structures and for manufactured housing (i.e. mobile homes). The Weatherization Assistant is a single entry point for operating either type of audit and organizing other types of weatherization data.

Required Audits:

- Single Family: National Energy Audit Tool (NEAT)
- Mobile Homes: Manufactured Home Energy Audit (MHEA)
- Multi Families: Energy Audit using the Queens Information Package (EA-QUIP)

Mandatory Audit Features:

The following are mandatory audit features that must be adhered to by WAP Agencies. Failure to do so may result in findings and noncompliance of grant agreement.

- Site specific audits must be completed on all units weatherized with US DOE Annual & USDHHS (LIHEAP) funds. The site specific energy audits re:
- Weatherization agencies must review and [create](#) libraries for all audits immediately when prices for materials and/or labor have changed.
- Please note that agencies are required to select the “Evaluate All” option in the energy audits to ensure when windows measures are selected the effectiveness of the window measure is confirmed.
- To correctly perform a NEAT or MHEA audit, labor costs must be included in the [library](#).
- Weatherization agencies are required to consider air sealing (infiltration reduction) as part of the NEAT energy audit analysis.
- Furnace Duct testing is no longer optional. The agency is mandated to perform duct blasting for the NEAT audit. Unless, there are clearance issues that inhibit the set up process. In these cases conducting pressure pan testing would be acceptable. Pressure pan testing is required for MHEA audits.
- All health and safety measures must be entered into the audit under “Itemized Cost” section. The ASHRAE 62.2 calculation sheet must be attached to the audit input report and placed in the client file.

- **Incidental Repairs can only be entered as a measure if deemed necessary for the effectiveness of one or more ECM's. Enter cost of measure including material and labor. Check the "Include in SIR" box. A comment must be added to this section indicating the ECM addressed by the measure.**
- If HIP funding will be implemented to update the existing heating unit and or domestic hot water tank, the new unit's condition and Annual Fuel Utilization Efficiency (AFUE) or Energy Factor will be required to be entered into the audit.
- For multi-family buildings, all EA-QUIP audits must be reviewed by State Monitor followed by a physical site assessment to confirm the work indicated on the audit is required for the multi-family project. If the project will be funded through LIHEAP WX, WAP Agency can proceed to a bid upon receiving written approval from State Monitor. If the project will be funded through DOE Annual funds, the project must be submitted to OLIEC for forwarding to USDOE for review and approval prior to any work commencing. WAP Agency must provide the following documents for submission to USDOE:
 - Short narrative describing existing building (size, no. of units, envelope, building age, mechanical systems) and proposed improvements.
 - Audit – EA-QUIP
 - Online EA-QUIP- WAP Agency must provide direct access to it with a password and userID.
 - Field assessment notes and back-up calculations (if any).
 - Any other documentation that was used to define the Scope of Work for the Project.
 - Scope of Work for the Project including SIR for each measure and cumulative SIR.
- To improve quality of audits, agencies are required to include the existing cooling information for the NEAT/MHEA audits.

1.1. Window Policy

This guidance will apply when replacing windows applicable to single, mobile, and multi-family units. **Please note that door and window replacement, repair, and/or installation are not eligible as WAP health and safety expenses (WPN 11-6).**

1. Replacement of 5 windows or more must be approved by the assigned State Monitor.
2. There must be a SIR of 1 or greater on the NEAT and/or any other approved audit to justify replacement.
3. Existing storm windows must be removed before installing new windows. Clients must be informed of this policy before Weatherization work is completed. If a client refuses to allow

storm windows to be removed, then new windows cannot be installed. If the client consents, he/she must sign an acknowledgment that will be placed in the client file.

4. Pictures of the existing windows must be placed in the client file.
5. Exterior framing must be finished. This means that either the wood is painted or capped and caulked.
6. Rotted wood must be replaced before painting or capping is completed. It is not acceptable to put capping over rotted wood.
7. Windows must operate properly after installation. This means that the window opens and closes smoothly and that locks operate as intended.
8. Pictures of installed replacement (new) windows must be placed in the client file.

1.2. Refrigerator Policy

The following policies and procedures will apply to the Replacement of Refrigerators. This list is not all-inclusive and may be amended to address other issues that become apparent after the start of the program.

Refrigerator Replacement Policy

Client Education The client must be given adequate information and sign an Acceptance Form to avoid problems with the delivery of the new refrigerator. If the client receives the information and declines to accept a replacement refrigerator, they are still entitled to have other work done that is recommended by the energy audit. It is most important that clients know that the replacement is based on the efficiency of the existing unit so the community does not think everyone who applies will get a new unit.

Payment for Refrigerators and Other Related Costs

The cost of the refrigerator includes delivery. However, if the client does not accept delivery of the unit, there will be a charge for the attempted delivery. To avoid these additional charges, each delivery request should have a backup or alternative delivery site. The alternate site must know that they may not receive the unit "early" so if it is successfully delivered to the primary location the alternate is not disappointed.

Unless there is a serious documented emergency, a client who fails to be available for delivery will forfeit the unit.

The cost of the refrigerator includes the pickup of the existing unit and refrigerant recovery. If the household has two refrigerators and agrees to discard both to receive one larger new unit, the agency will pay additional fee to have the second refrigerator removed.

Replacement Justification

1. Before a refrigerator can be replaced it must be evaluated. Sub grantee will use the Line Logger database to measure the rate of consumption and maintain the results in the client file.
 - a. Testing is required on **all** refrigerators replaced in dwellings containing 1-4 units.
 - b. 10% of the total refrigerators proposed to be replaced in a multi-family dwelling, 5 units or more, must be evaluated.
 - c. If no model number is available, then the unit must be metered.
2. Only one (1) new refrigerator per household. If the family has more than one refrigerator, two can be replaced with one large size refrigerator. If the household opts to have only one unit replaced, it will be replaced with a comparable size unit. Free standing freezer units are not included.
3. If two refrigerators exist and only one can be replaced, then the unit with the higher SIR must be replaced.
4. Installation of Side by Side refrigerators is not permissible.
5. Bottom Freezer refrigerators are allowable if client is ADA compliant.
6. A new refrigerator cannot be installed where none currently exists. If the refrigerator is inoperable, approval from the OLIEC will be required for replacement. Request must include a picture of the existing unit with efficiency information, if available.
7. The size of the refrigerator will be determined by the number of household members and amount of space available for the unit.
8. Three colors are available (white, black, and egg shell/almond).
9. The sub grantee will ensure that the client receives information regarding the make, model, and color of the refrigerator. The sub grantee will also have the client sign an acceptance form BEFORE the unit is delivered.
10. The client is to receive all instructional and warranty information for the refrigerator.
11. If a client refuses to accept a refrigerator, does not allow the old unit to be removed, or fails to keep two (2) delivery appointments, no refrigerator will be delivered to the client.
12. If a new refrigerator is defective upon delivery, the sub grantee will notify respective vendor and request a replacement.
13. WAP Agency is required to pay for all refrigerators delivered within 30 business days. Payment cannot be withheld because other Weatherization measures have not passed inspection.

RENTAL AND MULTI-UNITS

1. If tenants pay for electricity and own the existing refrigerator, sub grantees are to use the procedures for single-family owner-occupied units.
2. If tenants do not pay for electricity directly and do not own the existing refrigerator, the replacement should not be considered a priority. If the landlord wants replacements AND the energy audit recommendation supports the measure, leveraging applies. Landlords

must pay 50% of the cost for replacements. Any measures ranked higher must be installed before refrigerator replacements.

3. If tenants do not pay for electricity but own the refrigerators, replacement units may be considered AFTER the installation of measures that will reduce heating cost.
4. Refrigerator replacement is part of the average cost, must be recommended by the energy audit, and cannot be installed as a health and safety measure.
5. Replacement is also allowed in vacant units.
6. When a unit becomes vacant and the landlord received the refrigerator through the weatherization program, the refrigerator is to remain in the unit.
7. Copy of invoice for the refrigerator must be included in the client file.

1.3. Lighting Policy

As of May 11, 2017, New Jersey is approved to use Light emitting diode lighting (LEDs) in the Weatherization Assistance Program with the restrictions that LEDs will be Energy Star qualified or of equal or better quality and efficiency. LED lights in the NEAT will be entered on the itemized costs tab. See below image which demonstrates how the LED will reflect in the itemized Costs:

Comment

Itemized Costs								
Description	Cost	Include in SIR?	Material	Energy Savings (mBTU/yr)	Units (of energy saved)	Life of measure (years)	Fuel Type Saved	Comment
LED Light Energy Star	\$5.49	<input checked="" type="checkbox"/>	9 Watt (60 Replacement) energy star LED light bulb	74.46	kWh	20	Electricity	4 hrs x 365 (days) x 51 (watts) = 74460 \$15.97 / 4 bulbs plus labor (\$1.50) 20 year service life MFR suggests 22.8 years
Vapor Barrier Needed (Basement/Crawlspace)	\$59.97	<input type="checkbox"/>	See the User Defined Measure for a list of materials.					
Fix Improper Venting (Clothes Dryer)	\$43.00	<input type="checkbox"/>	See the User Defined Measure for a list of materials.					
CO Monitor is Needed	\$49.98	<input type="checkbox"/>	See the User Defined Measure for a list of materials.					
Smoke Detector is Needed	\$39.97	<input type="checkbox"/>	See the User Defined Measure for a list of materials.					

Fluorescent lighting is an allowable weatherization measure. Exterior lighting is permissible on Single Family, Mobile homes and Multi-Family units as long as the lighting fixture itself is physically attached to the building. Lighting upgrades must be recommended by the Energy Audit to consider its' cost effectiveness with other weatherization measures that will be installed in the dwelling unit.

1.4 Air Conditioning: Room air conditioners only.

For Central Air Condenser replacement agency's must adhere to the Heating Improvement Program's policies on replacement requirements.

If the customer has non-working air conditioner(s) and is elderly or has small children, or health problems related to excessive heat, the OLIEC supervisor must give permission to replace the A/C unit(s) under LIHEAP Health and Safety, on a case by case basis.

1. Verifying that Room Air Conditioner Qualifies for replacement.

- i. Is the system replacement justified? NEAT/MHEA energy audit must recommend room air conditioner with a Savings to Investment Ratio (SIR) of 1.0% or greater for replacement justification.
- ii. Replacement can only be assessed for existing room air conditioner(s). Maximum allowable replacement is 3 room A/C units.
- iii. The existing room air conditioner(s) must be inputted into the energy audit Cooling Section. The agency cannot force replacement by checking the required replacement box.
- iv. The agency must update energy audit Key Parameters for Window A/C replacement SEER value.
- v. The agency must enable A/C replacement in the Measure Library and enter in material and labor for the measure.
- vi. The agency must retain pre-and post-pictures of the replacement room A/C windows in the client file.

2. Replacement Guidelines

- i. The replacement of Room Air Conditioner(s) must meet or exceed current Energy Star requirements found on www.energystar.gov under "Products", then "Find ENERGY STAR Products".
- ii. Replacement of room A/C units must meet Stand Work Specifications found at <https://sws.nrel.gov/spec/533021> The SWS outlines the following criteria:
 1. Assessment
 2. Selection
 3. Installation
 4. Decommissioning
 5. Occupant education
- iii. Replacement unit will provide same or better functionality than existing unit, but smaller duty unit will be provided if existing is oversized.
- iv. Use the chart below to determine room A/C sizing.

Area to be cooled (square feet)	Capacity needed (BTUs per hour)
100 to 500	5,000
150 to 250	6,000
250 to 300	7,000
300 to 350	8,000
350 to 400	9,000
400 to 450	10,000
450 to 550	12,000
550 to 700	14,000
700 to 1,000	18,000
1,000 to 1,200	21,000
1,200 to 1,400	23,000
1,400 to 1,500	24,000
1,500 to 2,000	30,000
2,000 to 2,500	34,000

2. Screen by Screen Instructions:**2.1.NEAT**

NEAT was designed for use by local agencies in the Weatherization Assistance Program. It is an approved audit that meets all auditing requirements set forth by the USDOE Weatherization Assistance Program as well as those anticipated from new regulations pertaining to waiver of the 40 percent materials requirement.

NEAT applies engineering and economic calculations to evaluate energy conservation measures for single-family, detached houses or small multifamily buildings. You can use it to rank measures for each individual house, or to establish a priority list of conservation measures for nearly identical housing types.

NEAT was written for the Weatherization Assistance Program by Oak Ridge National Laboratory. Many building energy consumption algorithms are taken from Lawrence Berkeley Laboratory's Computerized Instrumented Residential Audit (CIRA), published in 1982 for the U.S. Department of Energy. Equipment retrofit conservation measures are based on published reports on various heating retrofits. Heating and cooling system replacement conservation measures are based on the energy ratings of new heating and cooling equipment.

The screenshot shows the WA 8.9.0.5 software interface. At the top is a menu bar with File, Edit, View, Insert, Format, Records, Window, and Help. Below the menu is a toolbar with various icons. The main window displays an 'Agency' form. A red callout box with the text 'All **bold outlined boxes** must have entry information.' points to the 'Agency Name' field, which contains 'Your Agency'. The 'State' dropdown is set to 'US'. Other fields include Agency Type (Other), Federal Grant #, EIN, Other ID Num, Address, City, State, Zip Code, Phone Number, Fax Number, Email, and Web Page URL. A checkbox is checked, indicating it is the default agency. At the bottom, there are 'AGENCY' and 'REPORT' sections with dropdown menus and buttons for 'New', 'Copy', 'Del', 'Preview', and 'Print'. A 'Select Clients' button and a '0 selected' indicator are also present. The bottom status bar shows 'Navigate to this Record' and 'NUM'.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All **bold outlined boxes** must have entry information.

Agency

Agency Name **Your Agency** State **US**

Agency Information | Contacts (0) | Cost Centers (0) | Surveys (0) | Clients (1) | Audits (2) | Work Orders (1) | Libraries (2) | Status History

Contact Name User Name Active References

Name Detail - First MI Last Work Phone

Company Address Cell Phone

Auditor EIN Unit Number Pager

Contractor Title City Fax

Crew State Home Phone

Supplier Zip Code Email

Web Page

Comment

AGENCY CONTACT

by Contact Name

by User Name

by Company

1 of 1 New Copy Del

Change LogOn Group and Password Unassigned

The Agency Contact's Full Name NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Agency Name State

Agency Information | Contacts (0) | **Cost Centers (0)** | Surveys (0) | Clients (1) | Audits (2) | Work Orders (1) | Libraries (2) | Status History

Cost Center Name **Not required** References

Cost Center Type

Program Year

Description

Comment

	Actual	Expected
Total Funds In	<input type="text"/>	<input type="text"/>
Total Non-Work Order Costs	<input type="text"/>	<input type="text"/>
Total Available Funds	<input type="text"/>	<input type="text"/>
Total Work Order Costs	<input type="text"/>	<input type="text"/>
Balance	<input type="text"/>	<input type="text"/>

Show Fund Transactions

Show Work Order Costs

COST CENTER

by Cost Center Name

1 of 1 New Copy Del

Name of the Cost Center NUM

The screenshot shows the WA 8.9.0.5 software interface. The main window is titled 'Agency' and contains the following elements:

- Agency Name:** Your Agency
- State:** US
- Navigation Tabs:** Agency Information, Contacts (0), Cost Centers (0), **Surveys (0)**, Clients (1), Audits (2), Work Orders (1), Libraries (2), Status History
- Survey Name:** [Empty field]
- Active:**
- Survey Question Definitions Table:**

Group	Order #	Question
- Record:** 1 of 1
- SURVEY DEFINITION:** by Survey Name [Dropdown], Comment [Text Area], 1 of 1, New, Copy, Del

A red box highlights the 'Surveys (0)' tab, and a red prohibition sign is overlaid on the table below it. The text 'Not required' is written in the red box.

What is the name of the survey that this question participates in (grouping) NUM

The screenshot shows the WA 8.9.0.5 software interface. The main window is titled 'Agency' and contains a form with the following fields: Agency Name (Your Agency), State (US), Agency Information, Contacts (0), Cost Centers (0), Surveys (0), Clients (1), Audits (2), Work Orders (1), Libraries (2), and Status History. A table below the form has columns for Client ID, Work Order, Contractor, Status, Date, and Inspect S. The first row of the table is highlighted, and a red box with the text 'Not required' is overlaid on the Work Order column. A large red prohibition sign is also overlaid on the table area. The bottom of the window shows 'Form View' and 'NUM'.

<Client ID>	<Work Order>	Contractor	Status	Date	Inspect S
Client (1)	Work Order (1)				

The screenshot displays the WA 8.9.0.5 software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, and Help. Below the menu is a toolbar with various icons. A red box highlights the text: "All **bold outlined boxes** must have entry information." The main window is titled "Client" and contains several sections:

- Client Information:** Includes fields for Client ID (Client (1)), Client Name, and Alt. Client ID. Below this are tabs for Client Information, Status, Energy Index, Contacts (0), Audits (2), WorkOrders (1), Surveys (0), and Photos (0).
- Client Details:** Includes Agency (Your Agency), State (US), Address, Unit Number, City, State, Zip Code, County, and Other Geographic Identifier.
- Dwelling:** Includes Type, Ownership, Primary Heating Fuel, Secondary Heating Fuel, Previously Weatherized, Low Cost/No Cost, High Energy Use, High Energy Burden, and Year Built. A red arrow points to the Year Built field with a red box containing the text: "Year built (actual or estimated) must be entered."
- Occupants:** Includes fields for Occupants (number of), Native American (0), Elderly (0), Children (0), Disabled (0), and Primary Language (English).
- Account #1 and #2:** Fields for account numbers.
- Cumulative Cost and SIR:** Fields showing \$0.00 and 0.0 respectively.
- CLIENT and REPORT sections:** The CLIENT section has dropdowns for "by Client ID", "by Contact Name", and "by Alt. Client ID". The REPORT section has a dropdown for "Select Report" (Client Completion Report) and buttons for "Preview", "Print", and "Snapshot File".

At the bottom of the window, there is a "Navigate to this Record" section with a "NUM" label and a page indicator showing "1 of 1" with "New", "Copy", and "Del" buttons.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Client

Client ID Client Name Alt. Client ID

Client Information | Status | Energy Index | Contacts (0) | Audits (2) | WorkOrders (1) | Surveys (0) | Photos (0)

Normalized Heating Energy Consumption Index Calculator

<Fuel Costs> **Default Costs** (fuel cost selections here are copied to new audits for this client)

Floor Area (sq ft) (floor area values entered here are copied to new NEAT audits for this client)

Heating Degree Days (base 65F) (this value is independent of the data in the audit weather file for this client)

	Fuel Type	Annual Cost (\$)	Est. % Heating	BTU/HDD/sq ft
Primary Heating Fuel:	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Secondary Heating Fuel:	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Total Heating BTU/HDD/sqft				<input type="text"/>

High Energy Use (Read only on this form. Use the Client Information tab to edit.)

Fuel Cost group record for this client NUM

The screenshot shows the WA 8.9.0.5 software interface. The main window is titled 'Client' and contains several tabs: Client Information, Status, Energy Index, Contacts (0), Audits (2), WorkOrders (1), Surveys (0), and Photos (0). The 'WorkOrders (1)' tab is selected and circled in red. Below the tabs is a table with the following columns: <Work Order Name>, Status, Status Date, Inspect Status, and Date. The table contains one row: 'Work Order (1)' with a status of 'Not required'. A large red prohibition sign is overlaid on the table area. At the bottom of the window, there are fields for 'Savings' (\$0.00), 'Cumulative CLIENT Actual Cost' (\$0.00), and 'SIR' (0.00). The status bar at the bottom indicates 'The human visible/assignable name or number of this work order' and 'NUM'.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Client ID **Client (1)** Client Name Alt. Client ID

Client Information Status Energy Index Contacts (0) Audits (2) WorkOrders (1) **Surveys (0)** Photos (0)

Survey Name

Survey Questions

Group	#	Question	Reply	<Comment>
	0			

Record: 1 of 1

SURVEY


by Survey Name

1 of 1 Del

Comment

which Survey to Create Create New Survey

What is the string value of the answer NUM

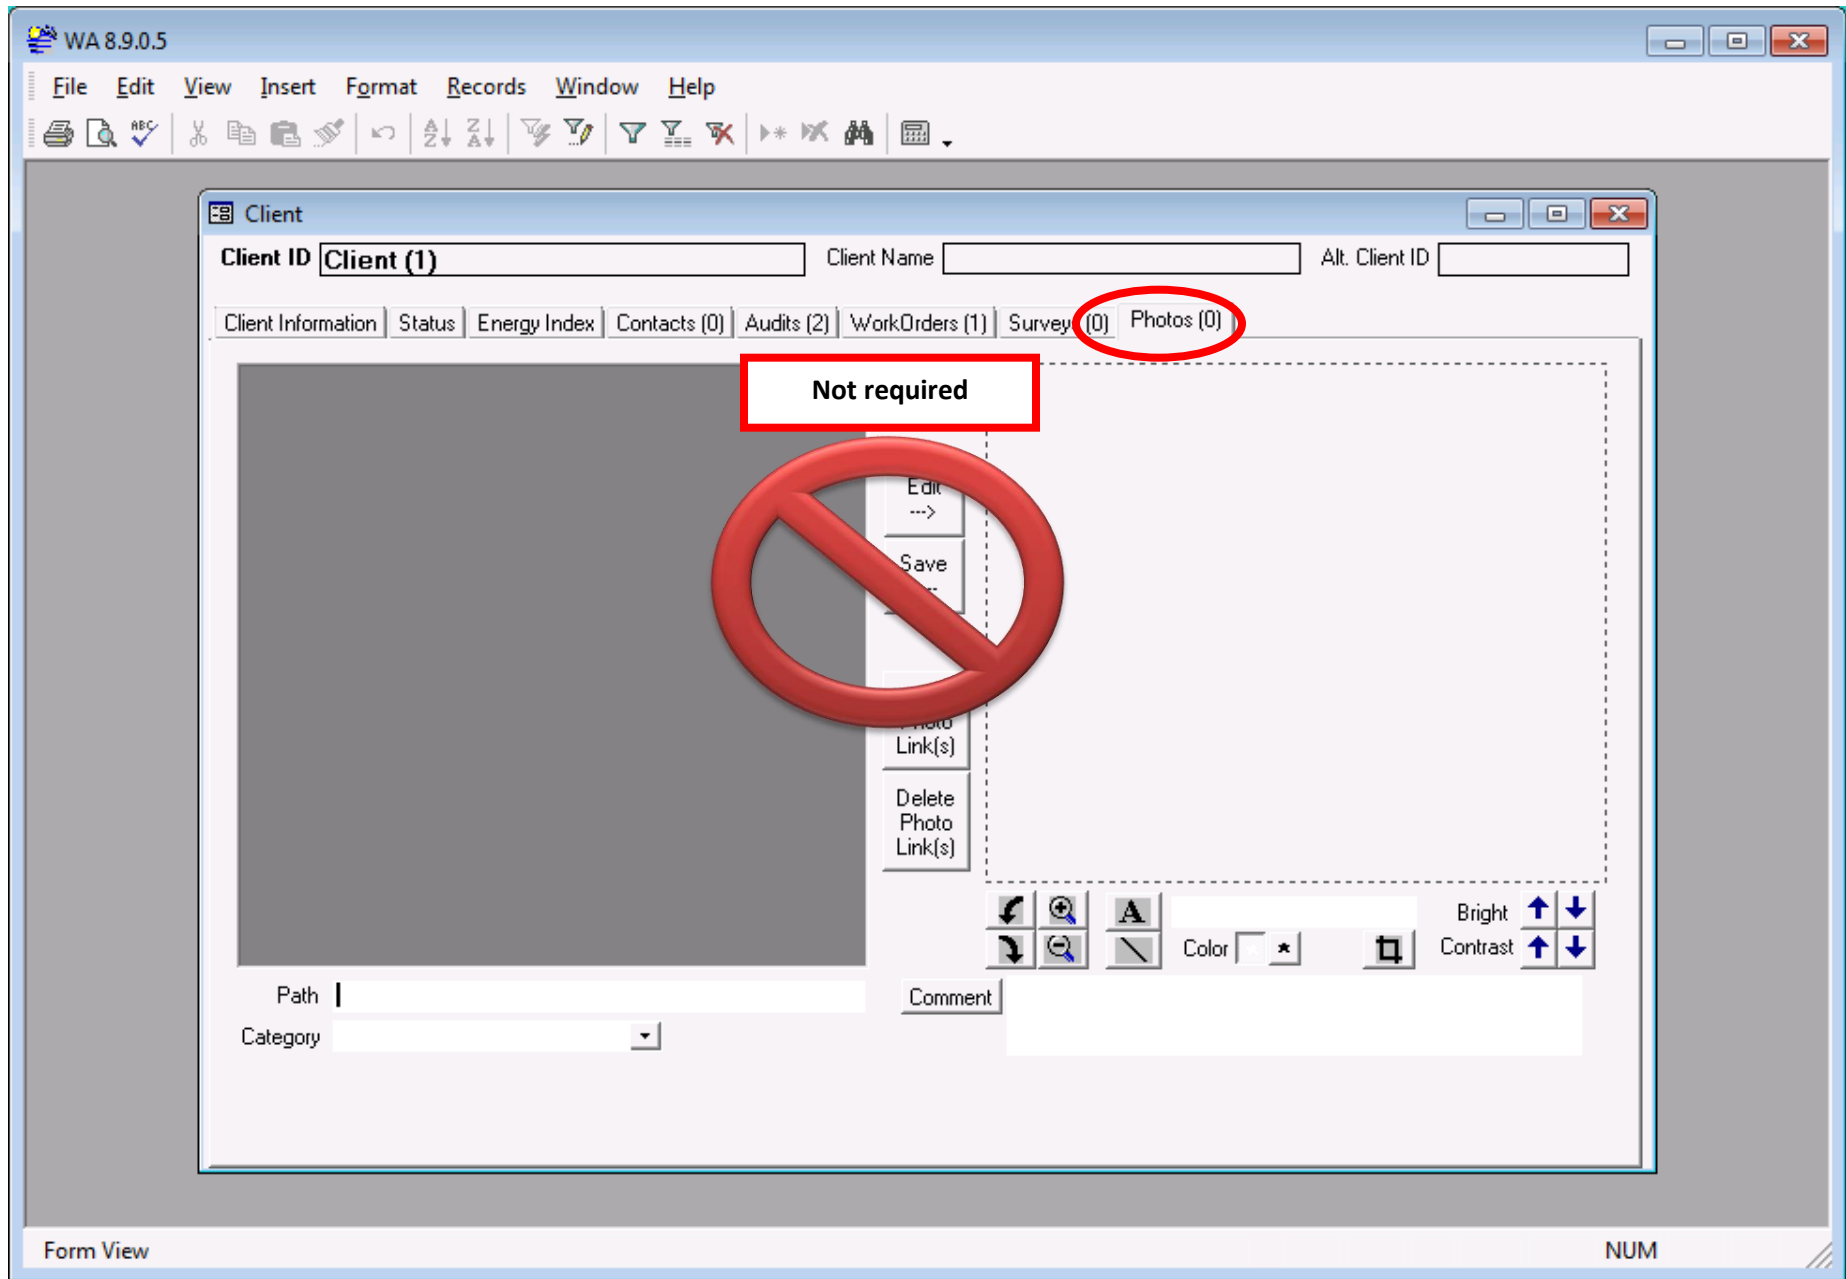

All bold outlined boxes must have entry information.

Enter the number of square feet of floor area that is conditioned. If more area is heated than effectively cooled, enter the heated floor area. The value is total floor area, not footprint area, (e.g. enter 2400 for a two story house with 1200 square feet in each story).

In this section the setup library should be picked and the supply library associated with the agency. Also the weather file should be picked. Example: NEWARKNJ.WX

Add comment here, if the household does not possess air conditioning or it has been removed for the winter season.

Economics Summary
 Measures Recommended
 Total Initial Cost (\$)
 Cumulative SIR

REPORT
 Select Report
 Preview Print Snapshot File

The name or ID of this Energy Audit Record NUM

2.1

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window is titled "NEAT Audit" and contains several input fields and buttons. A red box highlights the text "All bold outlined boxes must have entry information." in the top right corner. Another red box highlights a text box containing instructions: "Housing structures should have at least 4 walls. If the building has structure additions with a foundation/roof area it should be entered appropriately." A red arrow points from this box to a "WALL" entry in a list at the bottom left. The list entry shows "by Wall Code" followed by a dropdown menu, and a row of buttons: "New", "Copy", and "Del". The "New" button is highlighted. At the bottom of the window, there is a status bar with the text "The short code for this wall (must be unique for this Job) [Default WL1 (TAB on blank field to accept)]" and a "NUM" label.

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window title is "NEAT Audit".

Key fields and sections include:

- Audit Name:** "Audit (1)"
- Client ID:** "Client (1)"
- Client Name:** (empty)
- Alt. Client ID:** (empty)
- Navigation Tabs:** Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), Measures (0)
- Category Tabs:** Walls (0), Windows (0), Doors (0), Unfinished Attics (0), Finished Attics (0), Foundations (0)
- Window Code:** (empty)
- Retrofit Options:** (dropdown menu)
- Window Type:** (dropdown menu)
- FrameType:** (dropdown menu)
- Glazing Type:** (dropdown menu)
- Interior Shading:** (dropdown menu)
- Exterior Shading (%):** (input field)
- Leakiness:** (dropdown menu)
- Average Size:** Width (in) and Height (in) (input fields)
- Number on this Wall:** Wall Code (dropdown menu) and Number (input field)
- Buttons:** Run Audit, Last Run On, Not Run at
- Footer:** The short code identifying the window (must be unique for windows on this wall) [Default WD1 (TAB on blank field to acc) NUM

Callout boxes and annotations:

- Red box:** "All boxes must have entry information." (points to the top right area)
- Red box:** "Retrofit Option: select 'Evaluate All'" (points to the Retrofit Options dropdown)
- Yellow box:** "For window leakiness guidance, go to waptac.org under Weatherization Assistant Support Material." (points to the Leakiness dropdown)
- Red box:** "Enter the approximate percentage of window area frequently shaded by eaves (typically 20%), porches (typically 100%), or other physical exterior barriers. Do not include the percent (%) sign." (points to the Exterior Shading (%) input field)

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window is titled "NEAT Audit" and contains several tabs: Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), Measures (0). Under the "Shell" tab, there are sub-tabs for Walls (0), Windows (0), Doors (0), Unfinished Attics (0), Finished Attics (0), and Foundations (0). The "Doors (0)" sub-tab is active, showing fields for Door Code, Door Type, Area (sq ft), Storm Door Condition, Leakiness, Optional Dimensions (Width and Height in inches), and Number on this Wall (Wall Code and Number). A checkbox labeled "Replacement Door Required" is present, with a red circle and slash over it, and a red arrow pointing to it from a text box. Another text box at the top right states "All bold outlined boxes must have entry information." At the bottom left, there is a "DOOR" section with a dropdown menu for "by Door Code" and a list of doors (1) with "New", "Copy", and "Del" buttons. A "Comment" field is also visible. The status bar at the bottom indicates "Short door code (must be unique for doors on this wall) [Default DR1 (TAB on blank field to accept)]" and "NUM".

All **bold outlined boxes** must have entry information.

Checking the "Replacement required" box is not allowable. The audit must recommend the door replacement based on conditions entered.

DOOR
by Door Code [1] of 1 [New Copy Del]

Short door code (must be unique for doors on this wall) [Default DR1 (TAB on blank field to accept)] NUM

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "NEAT Audit" and contains several tabs: "Audit Information", "Status", "Shell", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", "Measures (0)", "Walls (0)", "Windows (0)", "Doors (0)", "Unfinished Attics (0)", "Finished Attics (0)", and "Foundations (0)".

Key fields and sections include:

- Audit Name:** "Audit (1)"
- Client ID:** "Client (1)"
- Client Name:** (empty)
- Alt. Client ID:** (empty)
- Attic Code:** (empty)
- Attic Type:** (dropdown menu)
- Joist Spacing (in):** (input field)
- Area (sq ft):** (input field)
- Roof Color:** (dropdown menu)
- Existing Insulation:** Type (dropdown), Depth (in) (input)
- Added Insulation:** Measure # (dropdown), Type (dropdown), Added R Value or Max. Depth (in) (input), Additional Cost (\$) (input)
- Buttons:** "Run Audit", "Last Run On", "Not Run at", and a date input field.
- UNFINISHED ATTIC:** A section with a dropdown menu "by Attic Code", a list of items (currently "1"), and buttons "New", "Copy", and "Del".
- Comment:** A large text area for notes.

Instructional callouts are provided in red-bordered boxes:

- Top right:** "All **bold outlined boxes** must have entry information." (referring to the "Added R Value or Max. Depth (in)" field)
- Bottom left:** "Open tab to enter additional Unfinished Attics. The sum of the attic area (Sq. ft.) should be about equal to the floor area (Sq. ft.) Add comment if the structure has an unusual floor plan." (with an arrow pointing to the "UNFINISHED ATTIC" section)
- Bottom right:** "If either the 'Added R Value' or 'Max. Depth (in)' fields are used; they must be explained in the comment section." (with an arrow pointing to the "Added R Value or Max. Depth (in)" field)

At the bottom of the window, there is a status bar with the text: "Short code describing attic (must be unique for this Job) [Default A1 (TAB on blank field to accept)]" and "NUM".

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window title is "NEAT Audit". Below the title bar, there are several input fields: "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". A red box highlights the top right area with the text: "All **bold outlined boxes** must have entry information." Below these fields are several tabs: "Audit Information", "Status", "Shell", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Under the "Shell" tab, there are sub-tabs for "Walls (0)", "Windows (0)", "Doors (0)", "Unfinished Attics (0)", "Finished Attics (0)", and "Foundations (0)". The "Finished Attics (0)" tab is selected. The main form area contains several sections: "Attic Code" with a text input field; "Attic Area Type" and "Attic Floor Type" with dropdown menus; "Area (sq ft)" with a text input field; "Roof Color" with a dropdown menu; "Existing Insulation" with "Type" and "Depth (in)" dropdown and text input fields; "Added Insulation" with "Measure #", "Type", "Added R Value or", "Max. Depth (in)", and "Additional Cost (\$)" dropdown and text input fields. On the right side, there is a vertical panel with buttons: "Run Audit", "Last Run On", "Not Run", and "at". A red box with an arrow points to the "FINISHED ATTIC" section at the bottom, containing the text: "Open tab to enter additional Finished Attics. Examples: slopes, knee-wall, knee-wall floor, and collar beam." The "FINISHED ATTIC" section includes a dropdown menu "by Attic Code", a list of items (1), and buttons "New", "Copy", and "Del". A "Comment" text area is also present. At the bottom of the window, there is a footer: "Short code describing attic (must be unique for this Job) [Default FA1 (TAB on blank field to accept)]" and "NUM".

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "NEAT Audit" and contains several tabs: "Audit Information", "Status", "Shell", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Below these tabs, there are sub-tabs for "Walls (0)", "Windows (0)", "Doors (0)", "Unfinished Attics (0)", "Finished Attics (0)", and "Foundations (0)".

Key annotations and their locations:

- Top Right:** A red box contains the text: "All **bold outlined boxes** must have entry information."
- Foundation Section:** A red box points to the "Area (sq ft)" field in the "Floor" section with the text: "The foundation perimeter should be consistent with the floor area."
- Foundation Wall Section:** A red box points to the "Perimeter (ft)" field in the "Foundation Wall" section with the text: "The foundation perimeter should be consistent with the floor area."
- Bottom Left:** A red box points to the "FOUNDATION" tab in the bottom left corner with the text: "Open tab to enter additional foundations. Examples: crawlspaces and slab on grade."

Other visible elements include a "Run Audit" button, "Last Run On" and "Not Run at" buttons, and a status bar at the bottom with the text: "Short name for the foundation space (must be unique for this Job) [Default F1 (TAB on blank field to accept)]" and "NUM".

All bold outlined boxes must have entry information.

Heating System Details

- Ensure "Output BTU" is entered in correct units.
- Ensure "Steady State Efficiency" (SSE) matches combustion test reading.
- If HIP funding is used to replace the heating unit, enter the new unit AFUE, instead of the existing systems SSE.
- If the "Mandatory Replacement" option has been chosen, there must be documented justification and an S.I.R of 1.0 on the Recommended Measure Report.

Open above tab to enter any uninsulated heating supply duct, located in non-conditioned areas.

Open tab to enter secondary heating source.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All bold outlined boxes must have entry information.

NEAT Audit

Audit Name **Audit (1)** Client ID **Client (1)** Client Name _____ Alt. Client ID _____

Audit Information | Status | Shell | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

AC Code _____

Equipment Type _____

Manufacturer _____

Model _____

Floor Area Cooled (sq ft) _____

Capacity (kBtu/hr) _____

SEER _____

Year Manufactured _____

Required Retrofits

Replacement Required **OLIEC approval required**

Tune-up Mandatory

Conversion of Room Air Conditioner EER to SEER
 $SEER = 0.9 * EER + 0.1$ Fan runs continuously
 $SEER = 1.2 * EER - 0.7$ Fan runs only when cooling

The year the cooling system was manufactured will calculate the SEER automatic.

COOLING SYSTEM

by AC Code _____

1 of 1 New Copy Del

Comment _____

Short name of cooling system [Default AC1 (TAB on blank field to accept)] NUM

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "NEAT Audit" and contains several tabs: Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), and Measures (0). The "Ducts/Infiltration" tab is active.

Key elements and callouts in the interface include:

- Evaluate Duct Sealing:** A checkbox labeled "Evaluate Duct Sealing" is highlighted with a red box. A callout box on the left states: "Evaluate Duct Sealing is required. Check this box to enter duct testing readings".
- Whole House Blower Door Measurements:** This section contains two columns: "Before Weatherization (Existing)" and "After Weatherization (Target or Actual)".

Measurement	Before Weatherization (Existing)	After Weatherization (Target or Actual)
Air Leakage Rate (cfm) at House Pressure Difference (Pa)	5872	3200
	50	50

 A callout box on the right states: "Both 'Before Weatherization' and 'After Weatherization' blower door measurement must be entered."
- Costs:** A field for "Infiltration Reduction (\$)" is set to "\$100.00". A callout box at the bottom states: "Infiltration reduction measures associated with the cost must be listed in the comment section. Infiltration reduction must achieve an S.I.R of 1.0 on the Recommended Measure Report. The following measures are acceptable in this category.
 - Door installation (where none exists) separating conditioned from non-conditioned areas.

At the bottom of the window, there is a status bar with the text: "Pre infiltration reduction Whole House blower door test (CFM) [Min 500 ,Max 8000]" and a "NUM" indicator.

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu is a toolbar with various icons. The main window is titled 'NEAT Audit' and contains several tabs: Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), and Measures (0). The 'Ducts/Infiltration' tab is active, and within it, the 'Air and Duct Leakages' sub-tab is selected and highlighted with a red box. Other sub-tabs include 'Optional Blower Door and Zonal Pressures (0)', 'Optional Pressure Balance (0)', and 'Optional Pressure Pans (0)'. A red arrow points from a red callout box to the 'Optional Blower Door and Zonal Pressures (0)' sub-tab. The callout box contains the text: 'Entry is required for additional diagnostic testing.' The form includes fields for 'Date' (6/19/2014), 'Conducted During', and 'Equipment Used'. There is a 'Blower Door Measurements' section with input fields for 'Air Leakage Rate (CFM)', 'Building Pressure Differential (Pa)', and 'Corrected CFM at 50 Pa', along with a 'Calculate' button. Below this are 'ZONAL Pressure Readings for:' and 'Pressure PAN Readings for:' sections, each with buttons for 'This Blower Door Test (0)' and 'Whole Audit (0)'. At the bottom left, there is a 'BLOWER DOOR TEST' section with a 'by Date' dropdown, a list of 1 test, and buttons for 'New', 'Copy', and 'Del'. A 'Comment' text area is also present. The bottom of the window shows a table header with the text 'When were the blower door/zonal pressure readings taken' and a column labeled 'NUM'.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Entry is optional for additional diagnostic testing.

NEAT Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Air and Duct Leakages Optional Blower Door and Zonal Pressures (0) Optional Pressure Balance (0) Optional Pressure Pans (0)

Location+	Initial (Pa)	Final (Pa)	<Comment>

Record: 1 of 1

A description of the zone where the pressure reading was taken NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Entry is optional for additional diagnostic testing.

NEAT Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information | Status | Shell | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Air and Duct Leakages | Optional Blower Door and Zonal Pressures (0) | Optional Pressure Balance (0) | Optional Pressure Pans (0)

Blower Door Test^	Register #	Location+	Register Type^	Initial (Pa)	Final (Pa)	<Comment>

Record: 1 of 1

Blower door test associated with the Pressure Pan reading (optional) NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information | Status | Shell | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Water Heating (0) | Refrigerators (0) | Lighting Systems (0)

Existing Equipment

Manufacturer Model

Fuel Rated Input

Location Input Units

Size (gal) Energy Factor

Water Heater Wrap Present Recovery Efficiency (%)

Water Heater Pipe Insulation Present

Original Tank Insulation

R Value Thickness (in) Type

Shower Heads

Number of ShowerHeads Avg. GPM

Shower Use (min/day)

Comment

New Del Optional Water Heater Details Operational Tests Vent Tests Inspections

Replacement

Pick from Library

Manufacturer

Model

Fuel

Rated Input

Input Units

Size (gal)

Energy Factor

Recovery Efficiency (%)

Installation Cost (\$)

Additional Cost (\$)

Run Audit

Last Run On

Not Run at

Select the manufacturer, or enter a string

NUM

All **bold outlined boxes** must have entry information.

Hot Water Equipment
 If you consider replacing the water heater, this is where you enter information. Enter the indicated information. All data on the form is required if the unit is to be used in consideration of the water heater replacement measure in NEAT and MHEA.

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "NEAT Audit" and contains several sections:

- Header:** Audit Name **Audit (1)**, Client ID **Client (1)**, Client Name, and Alt. Client ID.
- Navigation:** Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), Measures (0).
- Category:** Water Heating (0), Refrigerators (0), Lighting Systems (0).
- Existing Equipment:**
 - Manufacturer, Model, Style, Defrost, Size (cu ft), Location, Heated Space.
 - Available Space Dimensions: Height (in), Width (in), Depth (in).
 - Consumption:
 - Label/Database Annual Consumption: kWh/yr, Age, Door Seal Condition.
 - Metered Consumption: Metering Minutes, Meter Reading (kWh), Temperature (°F), Adjusted Consumption (kWh/yr), Refresh.
 - Manual Defrost and Includes Defrost Cycle .
- Replacement:**
 - Pick from Library (highlighted in green).
 - Manufacturer, Model, Style, Defrost, kWh/yr, Size (cu ft), Height (in), Width (in), Depth (in), Installation Cost (\$), Additional Cost (\$), Adjusted Consumption (kWh/yr), Annual Savings (kWh/yr).
 - Comment field.
 - Footnote: Adjusted consumptions and savings reported on this form assume that the refrigerators are in heated spaces. Final calculations will be based on the actual location.
- Buttons:** Run Audit, Last Run On, Not Run at.
- Footer:** Select the manufacturer, or enter a string; NUM.

Two red boxes with white text provide instructions:

- Top right box: "All **bold outlined boxes** must have entry information." (referring to the 'Pick from Library' dropdown and the 'Adjusted Consumption' and 'Annual Savings' fields).
- Bottom center box: "Testing is required on all refrigerators to be replaced in dwellings containing 1 -4 units." (with an arrow pointing to the 'Adjusted Consumption (kWh/yr)' field).

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All Boxes must have entry information.

NEAT Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information | Status | Shell | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Water Heating (0) | Refrigerators (0) | Lighting Systems (0)

Existing Incandescent Light

Light Code
Room
Location
Lamp Type
Quantity
Size (watts)
Use (hours/day)

Replacement Compact Fluorescent Light (CFL)

CFL Size (watts)
Additional Cost (\$/bulb)

Run Audit
Last Run On
Not Run
at

LIGHTING SYSTEM

by Light Code

1 of 1 New Copy Del

Comment

Short code for the lighting system (must be unique for this Job) [Default LT1 (TAB on blank field to accept)]

NUM

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window is titled "NEAT Audit" and contains several tabs: Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), and Measures (0). The "Health & Safety" tab is currently selected. Under this tab, there are three sub-sections: "Whole House", "Equipment", and "Building Shell". The "Whole House" section contains two checkboxes: "Smoke Detector is Needed" and "CO Monitor is Needed", both of which are unchecked. Below these is a "Carbon Monoxide Measurements" section with four input fields: "Room with Heating System (ppm)", "Room with Water Heater (ppm)", "Living Area (ppm)", and "Kitchen (ppm)". A "Comment" text area is located below the input fields. On the right side of the "Health & Safety" section, there is a vertical stack of buttons: "Run Audit", "Last Run On", "Not Run", and "at". A red box highlights the "Smoke Detector is Needed" and "CO Monitor is Needed" checkboxes, with arrows pointing to them from a text box that reads: "Smoke and CO detectors must be entered under the health and safety library drop down box." Another red box highlights the "Carbon Monoxide Measurements" input fields, with an arrow pointing to them from a text box that reads: "This is an optional entry of carbon monoxide (CO) readings. All carbon monoxide test results must be collected on the 'Heating System and Hot Water Heater Improvement Survey Report'." At the bottom left of the window, a status bar displays the text "Smoke detectors are needed". At the bottom right, there is a field labeled "NUM".

WA 8.9.0.5

File Edit View Insert Format Records Window Help

NEAT Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Whole House Equipment Building Shell

Worse Case Condition Draft Measurements

Space Heating System(s) (0)

Water Heating (0)

Wood Stove/Fireplace

Wood Stove/Fireplace is Present

Improper Venting

Combustion Air is Inadequate

Clothes Dryer

Improper Venting

Comment

Cook Stove

CO Measurement Oven (ppm)

CO Measurement Burner 1 (ppm)

CO Measurement Burner 2 (ppm)

CO Measurement Burner 3 (ppm)

CO Measurement Burner 4 (ppm)

Gas Leak Present

Exhaust Fans

Bathrooms Kitchen Air-to-Air Heat Exchanger

Missing Missing Exists

Not Operational Not Operational

Run Audit

Last Run On

Not Run at

Is there a wood stove in the home?

Above section entry is optional.

- Cook stove carbon monoxide measurements must be entered on the "[Data Collection/Health & Safety Assessment](#)".
- Worse Case combustion appliance drafting measurements must be collected on the "[Heating System and Hot Water Heater Survey Report](#)".
- Exhaust Fan information must be entered on the "[ASHRAE 62.2-2013 Auditor/Inspector Checklist](#)" and the [Calculation Sheet](#). Exhaust Fan repair, replacement and or installment, must be entered under the Health and Safety Library drop down box.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

NEAT Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information | Status | Shell | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Whole House | Equipment | Building Shell

Attic

- Recessed Lights Present
- Chimney/Flue Shielding Incorrect
- Wiring Problems
- Ventilation Inadequate
- Water Leaks Present
- Moisture/Mold Problems Evident
- Vermiculite Present
- Other Problems

Walls

- Wiring Problems
- Water Leaks Present
- Moisture/Mold Problems Evident
- Lead Based Paint is Likely
- Asbestos in Siding is Likely
- Other Problems

Basement/Crawlspace

- Vapor Barrier Needed
- Wiring Problems
- Water Leaks Present
- Plumbing Leaks Present
- Moisture/Mold Problems Evident
- Other Problems

Run Audit

Last Run On

Not Run at

Comment

**Above section entry is optional.
The information above must be entered on the "[Data Collection/Health & Safety Assessment](#)".**

The attic space has recessed ceiling lights

NUM

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu is a toolbar with various icons. The main window is titled "NEAT Audit" and contains several tabs: Audit Information, Status, Shell, Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), and Measures (0). The "Health & Safety" tab is currently selected. The interface includes fields for "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". There are also dropdown menus for "Copy from User Defined Measures" and "Copy from Library Health and Safety Measures". A "Run Audit" button is visible. A red-bordered callout box contains the following text:

Choose Health and Safety Measure from drop down box. Enter cost of measure including material and labor. Do not check box "Include in SIR".
Note: Health and Safety measures should appear at the bottom of the Recommended Measure Report.

Incidental Repairs can only be entered as a measure if deemed necessary for the effectiveness of one or more ECM's. Enter cost of measure including material and labor. Check the "Include in SIR" box.
Note: A comment must be added to this section indicating the ECM address by the measure.

LED Lighting can be entered as a measure. Cost, annual savings and should be entered the "Include in SIR" box should be checked off. Please see section 1.3 for further guidance.

At the bottom of the interface, there is a section for "ITEMIZED COST" with a "by Description" dropdown, a list of items (currently showing 1 of 1), and buttons for "New", "Copy", and "Del". A "Comment" field is also present. The status bar at the bottom indicates "Long description of itemized cost item (must be unique for this Job)" and "NUM".

The screenshot shows the NEAT Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, and Help. Below the menu bar is a toolbar with various icons for editing and navigation. The main window is titled "NEAT Audit" and contains several input fields and tabs. The "Audit Information" tab is active, showing fields for "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". Below these are tabs for "Status", "Shell", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)".


On the left side, there are several dropdown menus and input fields: "Type", "Period", "Units", "Days in first period", "Degree Days", "Base Temperature (F)", "Base Load", and "Comment".

In the center, there is a table with the following columns: #, Month, Day, Usage, and Degree Days. The table contains one row with the values: # 0, Month 0, Day 0, Usage 0, and Degree Days 0. A red callout box is overlaid on the table with the text: "Utility bill entry is optional. Not a mandatory section."

At the bottom left, there is a "UTILITY BILLS" section with a "by Period" dropdown menu and navigation buttons: "1", "New", and "Del".

At the bottom right, there is a "NUM" label.

At the bottom of the window, there is a footer with the text: "Heating or cooling bills (the combination of Type and Period must be unique for this Job)".

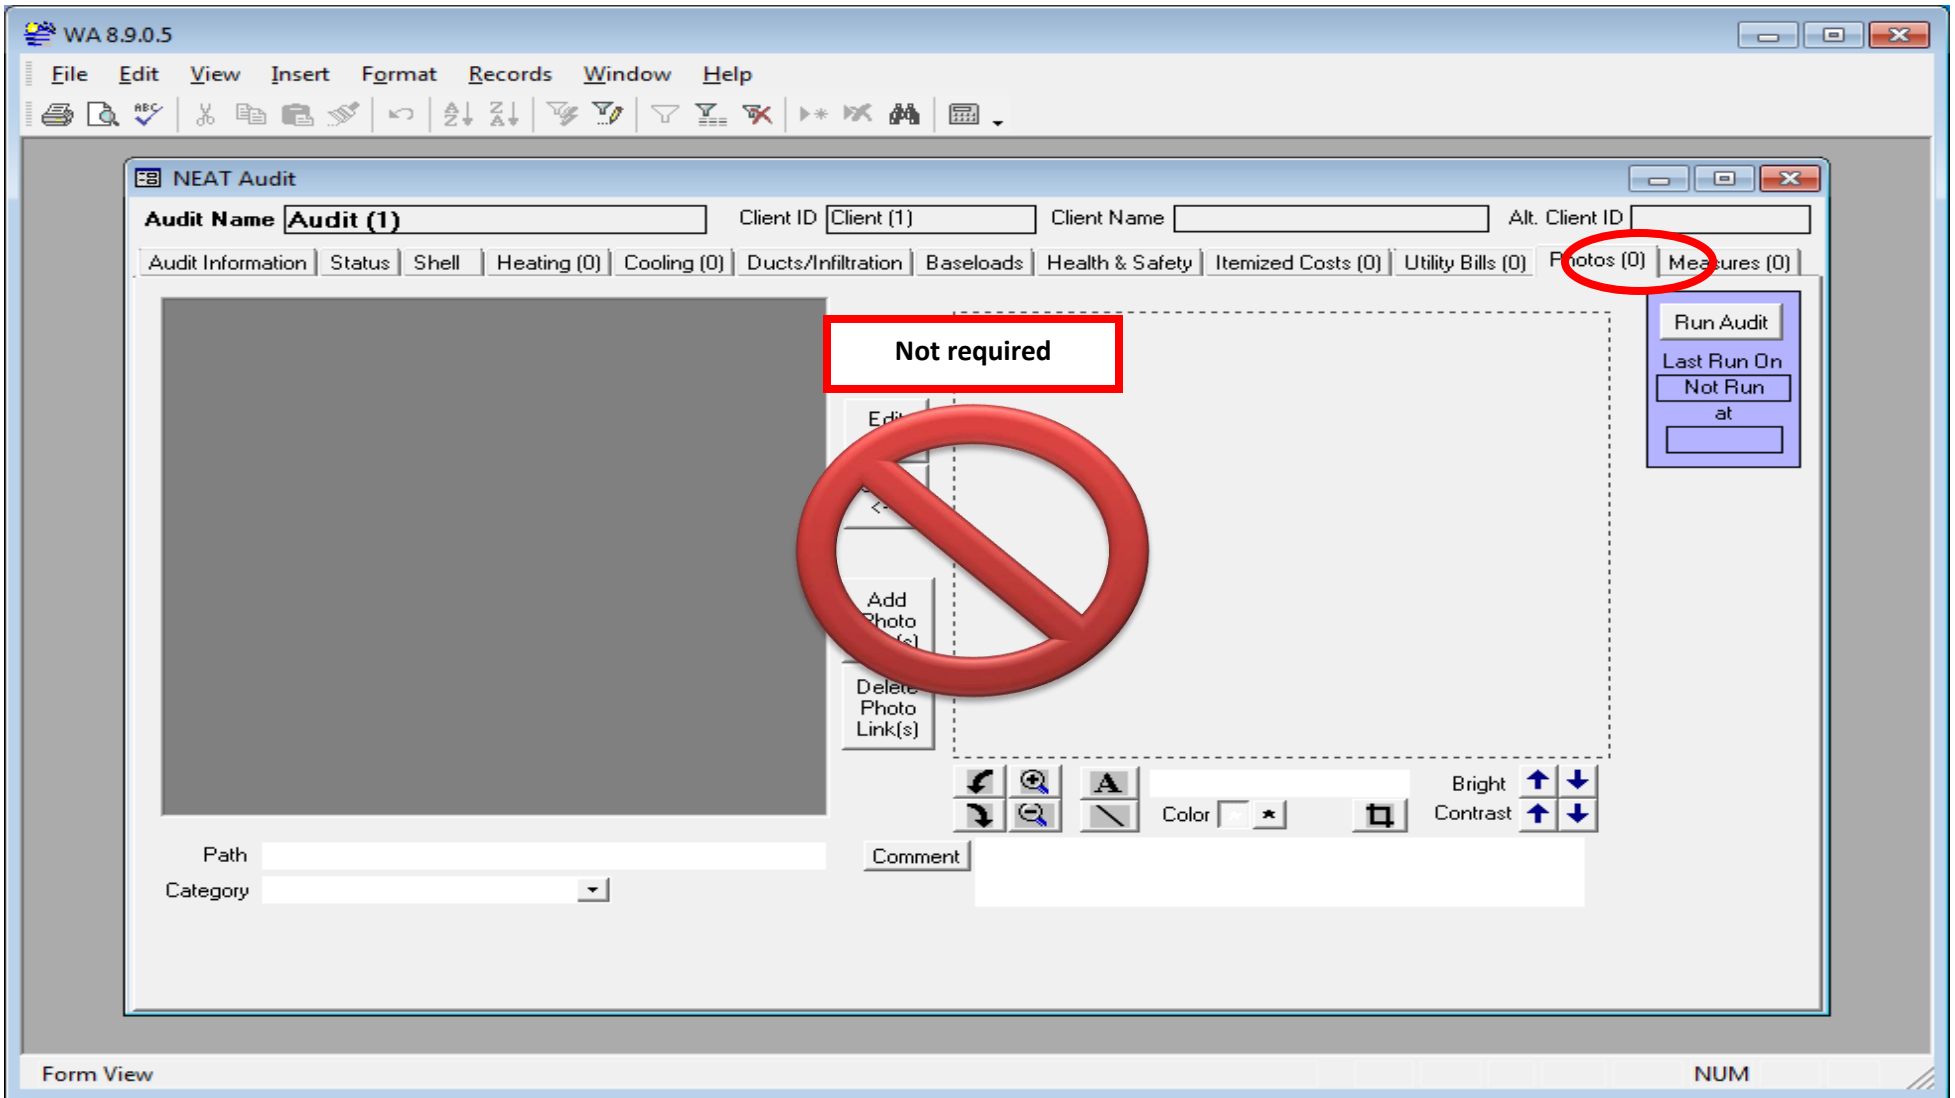

2.2.MHEA

The Manufactured Home Energy Audit (MHEA) is a software tool that predicts manufactured home energy consumption and recommends weatherization retrofit measures. It was developed to assist local weatherization agencies working with the U.S. Department of Energy (DOE) Weatherization Assistance Program. Whether new or experienced, employed within or outside the weatherization assistance program, all users can benefit from incorporating MHEA into their manufactured home weatherization programs. DOE anticipates that the state weatherization assistance programs that incorporate MHEA into their programs will find significant growth in the energy and cost savings achieved from manufactured home weatherization.

The screenshot shows the MHEA Audit software interface. At the top, a red box contains the text: "All **bold outlined boxes** must have entry information." Below this, the main form is divided into several sections. On the left, there are fields for "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". Below these are tabs for "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". The "Audit Information" tab is active, showing fields for "Audit Name", "Client ID", "Agency Name", "Agency State", "Auditor", and "Libraries and Other Options" (Setup Library, Fuel Cost Library, Supply Library, Weather File, Billing Adjustment). To the right of these are fields for "Length (ft)", "Width (ft)", "Exterior Wall Height (ft)", "Wind Shielding", "Home Leaking", and "Outdoor Water Heater Closet". A red box with an arrow points to the "Outdoor Water Heater Closet" checkbox, containing the text: "Add comment here, if the household does not possess air conditioning or it has been removed for the winter season." To the right of the "Outdoor Water Heater Closet" field is another red box with an arrow pointing to the "Length (ft)" and "Width (ft)" fields, containing the text: "Indicate whether or not the water heater is housed in an unconditioned closet with an exterior access. If an outdoor closet exists, the calculations will not include it in the conditioned portion of the home. The wall, floor, and ceiling areas of the home are adjusted to account for the water heater closet." Below the "Outdoor Water Heater Closet" field is an "Economics Summary" section with fields for "Measures Recommended", "Initial Cost (\$)", and "Cumulative SIR". At the bottom left, there is an "AUDIT" section with dropdown menus for "by Audit Name", "by Client ID", "by Client Name", and "by Alternate Client ID", along with navigation buttons. At the bottom right, there is a "REPORT" section with a "Select Report" dropdown (set to "Recommended Measures") and buttons for "Preview", "Print", and "Snapshot File".

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All **bold outlined boxes** must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) Doors (0) Ceiling (0) Floor (0)

Wall Stud Size Orientation of Long Wall Wall Ventilation

Existing Insulation

Batt/Blanket (in) Loose Fill (in) Foam Core (in)

Carport/Porch Roof

Length (ft) Width (ft)

Run Audit

Last Run On

Not Run at

A manufactured home wall may be intentionally or unintentionally ventilated. A ventilated wall has a space for air to flow between the exterior and interior wall materials. One technique to determine if a wall is ventilated is to check if the wall insulation is dirty inside the wall cavity. Pull up slightly on the lower end of an exterior wall panel to check for dirty insulation. If a wall is ventilated, the insulation will be dirty. MHEA degrades the wall R-value for ventilated walls.

Uninsulatable Wall Area (sq ft) Additional Cost (\$) \$0.00

Comment

New Del

Wall stud size NUM

The screenshot shows the WA 8.9.0.5 software interface for an MHEA Audit. The main window contains several input fields and tabs. A red box at the top right states: "All boxes must have entry information." Below this, the "MHEA Audit" window has a header with "Audit Name: Audit (1)", "Client ID: Client (1)", and "Client Name". A series of tabs are visible: "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Under "Walls (0)", "Windows (0)", "Doors (0)", "Ceiling (0)", and "Floor (0)", the "Windows (0)" tab is active. It contains fields for "Window Code", "Window Type", "Frame Type", "Glazing Type", "Interior Shading", "Exterior Shading", and "Leakiness". A "Retrofit Options" dropdown menu is also present. A red box with an arrow pointing to this dropdown says: "Retrofit Option, select 'Evaluate All'". A yellow box with an arrow pointing to the "Leakiness" field says: "Window Leakiness guidance go to waptac.org under Weatherization Assistant Support Material." A red box with an arrow pointing to the "Leakiness" field says: "Enter the approximate percentage of window area frequently shaded by eaves (typically 20%), porches (typically 100%), or other physical exterior barriers. Do not include the percent (%) sign." Below these fields are "Average Size" (Width and Height in inches) and "Number Facing" (North, South, East, West) sub-sections. At the bottom left, a "WINDOW" tab is highlighted, with a red box saying: "Open tab to enter additional window codes for different window types and or sizes." A "Comment" field is also visible. On the right side, there is a "Run Audit" button and a "Last Run On" section with "Not Run at" and a blank input field. At the bottom of the window, a status bar reads: "The short code identifying the window (must be unique for windows on this wall) [Default WD1 (TAB on blank field to acc NUM".

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All bold outlined boxes must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) **Doors (0)** Ceiling (0) Floor (0)

Door Code Type

Storm Door Present

Replacement Door Required

Additional Cost (\$/door)

Size: Width (in) Height (in)

Number Facing: North South East West

Run Audit Last Run On Not Run at

The agency's assigned Monitor must approve the mobile home door replacement, before this box is checked.

DOOR by Door Code

Comment

Open tab to enter additional door codes for different door types and or sizes.

Short door code (must be unique for doors on this wall) [Default DR1 (TAB on blank field to accept)] NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All bold outlined boxes must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) Doors (0) Ceiling (0) Floor (0)

RoofType Roof Color Joist Size

Existing Insulation

Batt/Blanket (in) 0

Loose Fill (in) 0

Foam Core (in) 0

Cathedral Ceiling (%) 0

Additional Cost (\$) \$0.00

Comment

New Del

Run Audit

Last Run On

Not Run at

Height of Bowstring Roof
For Bowstring Roofs, enter the maximum height in inches of the roof above the ceiling, disregarding any existing insulation. This assists MHEA in determining the available space for additional insulation.

Enter the approximate percent floor area that lies beneath any portion of the manufactured home having a cathedral ceiling (a sloped ceiling where the roof and ceiling planes are parallel). For example, if a cathedral ceiling is above the living room and the living room floor area is about one third the total home floor area, the percent cathedral ceiling is about 33%.

The type of roof/ceiling construction NUM

The screenshot shows the MHEA Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "MHEA Audit" and contains several tabs: Audit Information, Status, Shell (0), Addition (0), Heating (0), Cooling (0), Ducts/Infiltration, Baseloads, Health & Safety, Itemized Costs (0), Utility Bills (0), Photos (0), and Measures (0). Below these tabs, there are sub-tabs for Walls (0), Windows (0), Doors (0), Ceiling (0), and Floor (0). The "Floor (0)" sub-tab is active, showing fields for "Floor Joist Direction", "Floor Joist Size", "Floor Wing Description", "Loose Insulation Thickness (in)", "Batt/Blanket Insulation Location", "Batt/Blanket Thickness (in)", "Skirt Present" (checkbox), "Floor Belly (Center) Description", "Floor Joist Size", "Belly Cavity Configuration", "Condition of Belly", "Maximum Depth of Belly Cavity (in)", "Loose Insulation Thickness (in)", "Batt/Blanket Insulation Location", "Batt/Blanket Thickness (in)", "Additional Cost (\$)", "Comment", "New", and "Del".

All bold outlined boxes must have entry information.

Indicate whether or not a skirt exists around the exterior of the home. Research has shown that skirting only protects the manufactured home belly from exposure to the wind. If skirting exists, MHEA adjusts the exterior R-value to account for the absence of wind when the total R-value of the floor/belly section is calculated.

MHEA needs the belly wrap condition to calculate the effectiveness of existing insulation in the floor/belly section. If the belly is in other than good condition and you anticipate having to insulate the belly, you may wish to include as "Additional Cost" the cost of repairing the belly. Or, you may include this cost as an "Itemized Cost".

Floor joist direction. NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) Doors (0) Ceiling (0) Floor (0)

Wall Stud Size Addition Orientation Wall Ventilation

Existing Insulation
 Batt/Blanket (in) 0
 Loose Fill (in) 0
 Foam Core (in) 0

Additional Cost (\$) \$0.00

Comment

New Del

Run Audit
 Last Run On
 Not Run
 at

Interior Wall
 Max Height (ft)
 Min Height (ft)

Interior Wall Height
 Enter the height in feet of the addition walls. Because additions are usually constructed by the occupant, they are often uniquely designed. If the walls are of varying height, enter the maximum and minimum wall heights. If the walls are all the same height, enter the same value in both the maximum and minimum height fields.

Wall stud size NUM

The screenshot shows the WA 8.9.0.5 MHEA Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window is titled "MHEA Audit" and contains several input fields: "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". Below these are tabs for "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Under the "Addition (0)" tab, there are sub-tabs for "Walls (0)", "Windows (0)", "Doors (0)", "Ceiling (0)", and "Floor (0)". The "Windows (0)" sub-tab is active, showing fields for "Window Code", "Window Type", "FrameType", "Glazing Type", "Interior Shading", "Exterior Shading", "Leakiness", "Average Size" (Width and Height in inches), and "Number Facing" (North, South, East, West). A "Retrofit Options" dropdown menu is also present. A "Run Audit" button is on the right, with "Last Run On" and "Not Run at" fields below it. A "WINDOW" tab is open at the bottom, showing a list of window codes (currently "1") and buttons for "New", "Copy", and "Del".

If there is an addition- **All boxes** must have entry information.

Retrofit Option select "Evaluate All"

Open tab to enter additional window codes for different window types and or sizes.

The short code identifying the window (must be unique for windows on this wall) [Default AWD1 (TAB on blank field to a NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) **Addition (0)** Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) Doors (0) Ceiling (0) Floor (0)

Door Code
Type
Storm Door Present Additional Cost (\$/door)

Size: Width (in) Height (in)
Number Facing: North South East West

DOOR
by Door Code Comment
1 of 1 New Copy Del

Run Audit
Last Run On
Not Run
at

Short door code (must be unique for doors on this wall) [Default ADR1 (TAB on blank field to accept)] NUM

If there is an addition- All **bold outlined boxes** must have entry information.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

If there is an addition- All **bold outlined boxes** must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) **Addition (0)** Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Walls (0) Windows (0) Doors (0) Ceiling (0) Floor (0)

Joist Size [dropdown]
Roof Color [dropdown]
Additional Cost (\$) \$0.00

Existing Insulation
Batt/Blanket (in) 0
Loose Fill (in) 0
Foam Core (in) 0

Comment [text area]

Run Audit
Last Run On
Not Run at

New Del

Roof/ceiling joist size NUM

The screenshot shows the MHEA Audit software interface. At the top, the title bar reads "WA 8.9.0.5". Below it is a menu bar with "File", "Edit", "View", "Insert", "Format", "Records", "Window", and "Help". A toolbar contains various icons for file operations and editing. A red-bordered callout box in the upper right contains the text: "If there is an addition- All **bold outlined boxes** must have entry." The main window is titled "MHEA Audit" and features a tabbed interface. The "Addition (0)" tab is selected and circled in red. Other tabs include "Audit Information", "Status", "Shell (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Below the tabs, there are fields for "Audit Name" (containing "Audit (1)"), "Client ID" (containing "Client (1)"), "Client Name", and "Alt. Client ID". The "Floor (0)" sub-tab is active, showing fields for "FloorType", "Batt/Blanket Location", "Floor Joist Size", "Existing Insulation" (with sub-fields for "Batt/Blanket (in)" and "Loose Fill (in)"), "Floor Dimensions" (with sub-fields for "Length (ft)" and "Width (ft)"), and "Depth Available for Added Insulation (in)". A "Comment" text area and "New" and "Del" buttons are also present. On the right side, there is a vertical panel with buttons for "Run Audit", "Last Run On", "Not Run", and "at". At the bottom of the window, a status bar contains the text "The floor construction type for the addition" on the left and "NUM" on the right.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All bold outlined boxes must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID **Client (1)** Client Name Alt. Client ID

Audit Information | Status | Shell (0) | Addition (0) | **Heating (0)** | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Primary (0) | Secondary (0) | **Replacement (0)**

Equipment Type Tune-up Mandatory

Fuel

Capacity (kBtu/hr)

Efficiency

Efficiency Units

Duct Location

Duct Insulation Location

Heat Supplied (%)

Programmable Thermostat

Comment

New Del Operational Tests Vent Tests Furnace Components Inspections Thermostat

Run Audit
Last Run On
Not Run
at

Type of heating system NUM

The screenshot shows the MHEA Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window is titled "MHEA Audit" and contains several input fields and tabs. The "Ducts/Infiltration" tab is selected and circled in red. The "Primary (0)" tab is also circled in red. The "Secondary (1)" tab is selected. The input fields include: Equipment Type (dropdown), Capacity (kBtu/hr) (text box), Efficiency (text box), Efficiency Units (dropdown), Duct Location (dropdown), Duct Insulation Location (dropdown), and Floor Area Cooled (%) (text box). There is a "Tune-up Mandatory" checkbox. A "Comment" text area is located below the input fields. At the bottom left, there are "New" and "Del" buttons. At the bottom right, there is a "NUM" label. A red box highlights the text: "All bold outlined boxes must have entry information." A yellow box contains the text: "Conversion of Room Air Conditioner EER to SEER" followed by the formulas: $SEER = 0.9 * EER + 0.1$ Fan runs continuously and $SEER = 1.2 * EER - 0.7$ Fan runs only when cooling. A yellow arrow points from this box to the "Efficiency" field.

The screenshot shows the MHEA Audit software interface. At the top, the title bar reads "WA 8.9.0.5". The menu bar includes "File", "Edit", "View", "Insert", "Format", "Records", "Window", and "Help". Below the menu bar is a toolbar with various icons. The main window is titled "MHEA Audit" and contains several input fields and tabs. The "Audit Name" field is set to "Audit (1)". The "Client ID" field is set to "Client (1)". The "Client Name" and "Alt. Client ID" fields are empty. Below these fields are tabs for "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Under the "Cooling (0)" tab, there are sub-tabs for "Primary (0)", "Secondary (0)", and "Replacement (0)". The "Secondary (0)" sub-tab is selected and circled in red. The "Ducts/Infiltration" tab is also circled in red. The main form area contains the following fields: "Equipment Type" (dropdown menu), "Capacity (kBtu/hr)" (text box), "Efficiency" (text box), "Efficiency Units" (dropdown menu), and "Floor Area Cooled (%)" (text box). Below these fields is a "Comment" text area. On the right side of the form, there is a vertical stack of buttons: "Run Audit", "Last Run On", "Not Run", and "at". At the bottom left of the form area are "New" and "Del" buttons. The status bar at the bottom of the window shows "Type of cooling system" on the left and "NUM" on the right. A red-bordered text box in the upper right corner of the window contains the text: "If there is a secondary cooling source- All **bold outlined boxes** must have entry information."

The screenshot shows the MHEA Audit software interface. At the top, the window title is "WA 8.9.0.5" and the menu bar includes "File", "Edit", "View", "Insert", "Format", "Records", "Window", and "Help". The main window is titled "MHEA Audit" and contains several input fields and tabs. A red box highlights the menu bar with the text: "All **bold outlined boxes** must have entry information." Below the menu bar, there are fields for "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". A series of tabs are visible: "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". The "Cooling (0)" tab is selected, and within it, the "Replacement (0)" sub-tab is also selected. A red circle highlights the "Replacement (0)" sub-tab. The "Replacement Required" checkbox is checked. A red arrow points from a text box to this checkbox. The text box contains: "The 'Replacement Requirement' option for cooling is not allowable. OLIEC approval required." The form includes fields for "Equipment Type", "Capacity (kBtu/hr)", "Efficiency", "Efficiency Units", "Duct Location", and "Duct Insulation Location". A "Cost" section contains "Labor (\$)" and "Material (\$)" fields. A note states: "Note: The primary heating system is marked for a mandatory tune-up. This replacement system information will not be used in the analysis." There are "Comment" and "<Comment>" fields, and "New" and "Del" buttons. On the right side, there are buttons for "Run Audit", "Last Run On", and "Not Run". At the bottom of the window, the text "Type of cooling system" is on the left and "NUM" is on the right.

The screenshot shows the MHEA Audit software interface. At the top, there is a menu bar (File, Edit, View, Insert, Format, Records, Window, Help) and a toolbar. The main window title is "MHEA Audit". Below the title bar, there are fields for "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". A series of tabs are visible: "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". The "Ducts/Infiltration" tab is active, showing sub-tabs for "Air and Duct Leakages", "Optional Blower Door and Zonal Pressures (0)", "Optional Pressure Balance (0)", and "Optional Pressure Pans (0)".

Key features and annotations:

- The "Evaluate Duct Sealing" checkbox is circled in red. A red arrow points from a callout box to it.
- The "Whole House Blower Door Measurements" section contains two columns: "Before Weatherization (Existing)" and "After Weatherization (Target or Actual)". Each column has input fields for "Air Leakage Rate (cfm)" and "at House Pressure Difference (Pa)". A red arrow points from a callout box to this section.
- Below this section is a "Costs" section with an "Infiltration Reduction (\$)" input field and a "Comment" text area. A red arrow points from a callout box to the "Comment" field.
- On the right side, there is a "Run Audit" button and a "Last Run On" field with a "Not Run at" label.

Three red callout boxes provide instructions:

- Top Callout:** Both "Before Weatherization" and "After Weatherization" blower door measurement must be entered.
- Bottom Left Callout:** Use of measured duct leakage data is an optional feature in MHEA. If not selected, the form presented will only address infiltration, not duct leakage data. If duct leakage reduction measures have been performed, a cost box will appear enter the total (labor and materials) dollar cost of the work. The entry is required.
- Bottom Right Callout:** Infiltration reduction measures associated with the cost must be listed in the comment section. Infiltration reduction must achieve an S.I.R of 1.0 on the Recommended Measure Report.

At the bottom of the window, there is a status bar with the text "Pre infiltration reduction Whole House blower door test (CFM) [Min 500 ,Max 8000]" and a "NUM" label.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Entry is optional for additional diagnostic testing.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Air and Duct Leakages Optional Blower Door and Zonal Pressures (0) Optional Pressure Balance (0) Optional Pressure Pans (0)

Date 6/19/2014

Conducted During

Equipment Used

Blower Door Measurements

Air Leakage Rate (CFM)

Building Pressure Differential (Pa)

Calculate Corrected CFM at 50 Pa

Run Audit

Last Run On

Not Run at

ZONAL Pressure Readings for: This Blower Door Test (0) Whole Audit (0)

Pressure PAN Readings for: This Blower Door Test (0) Whole Audit (0)

BLOWER DOOR TEST

by Date

1 of 1 New Copy Del

Comment

When were the blower door/zonal pressure readings taken NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Entry is optional for additional diagnostic testing.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Air and Duct Leakages Optional Blower Door and Zonal Pressures (0) Optional Pressure Balance (0) Optional Pressure Pans (0)

Location+	Initial Pressure (Pa)	Final Pressure (Pa)	<Comment>

Record: 1 of 1

A description of the zone where the pressure reading was taken NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Entry is optional for additional diagnostic testing.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Air and Duct Leakages Optional Blower Door and Zonal Pressures (0) Optional Pressure Balance (0) Optional Pressure Pans (0)

Register #	Location+	Register Type^	Initial Pressure (Pa)	Final Pressure (Pa)	<Comment>

Record: 1 of 1

The register number NUM

Run Audit
Last Run On
Not Run
at

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Water Heating (0) Refrigerators (0) Lighting Systems (0)

Existing Equipment

Manufacturer Model

Fuel Rated Input

Location Input Units

Size (gal) Energy Factor

Water Heater Wrap Present Recovery Efficiency (%)

Water Heater Pipe Insulation Present

Original Tank Insulation

R Value Thickness (in) Type

Shower Heads

Number of ShowerHeads Avg. GPM

Shower Use (min/day)

Comment

New Del Optional Water Heater Details Operational Tests Vent Tests Inspections

Replacement

Pick from Library

Manufacturer

Model

Fuel

Rated Input

Input Units

Size (gal)

Energy Factor

Recovery Efficiency (%)

Installation Cost (\$)

Additional Cost (\$)

Run Audit

Last Run On

Not Run at

All **bold outlined boxes** must have entry information.

Hot Water Equipment
If you consider replacing the water heater, this is where you enter information. Enter the indicated information. All data on the form is required if the unit is to be used in consideration of the water heater replacement measure in NEAT and MHEA.

Select the manufacturer, or enter a string NUM

WA 8.9.0.5

File Edit View Insert Format Records Window Help

All bold outlined boxes must have entry information.

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information | Status | Shell (0) | Addition (0) | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Water Heating (0) | Refrigerators (0) | Lighting Systems (0)

Existing Equipment

Manufacturer Model

Style Defrost

Size (cu ft) Location Heated Space

Available Space Dimensions

Height (in) Width (in) Depth (in)

Consumption

Label/Database Annual Consumption

kWh/yr Age

Door Seal Condition

OR

Metered Consumption

Metering Minutes

Meter Reading (kWh)

Temperature (°F)

Adjusted Consumption (kWh/yr) Refresh

Manual Defrost

Include Defrost Cycle

New Del

Replacement

Pick from Library

Manufacturer

Model

Style

Defrost

kWh/yr Size (cu ft)

Height (in) Width (in) Depth (in)

Installation Cost (\$)

Additional Cost (\$)

Adjusted Consumption (kWh/yr)

Annual Savings (kWh/yr)

Comment

Adjusted consumptions and savings reported on this form assume that the refrigerators are in heated spaces. [unclear] will be based on the actual location.

Testing is required on all refrigerators to be replaced in dwellings containing 1 -4 units.

Run Audit

Last Run On

Not Run at

NUM

Select the manufacturer, or enter a string

The screenshot shows the MHEA Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. A red box highlights a warning message: "All boxes must have entry information." The main window is titled "MHEA Audit" and contains several input fields and tabs. The "Audit Name" field is filled with "Audit (1)". Other fields include "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". There are several tabs: "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". Below these tabs are more specific tabs: "Water Heating (0)", "Refrigerators (0)", and "Lighting Systems (0)". The "Lighting Systems (0)" tab is active, showing two main sections: "Existing Incandescent Light" and "Replacement Compact Fluorescent Light (CFL)". The "Existing Incandescent Light" section has fields for "Light Code", "Room", "Location", "Lamp Type", "Quantity", "Size (watts)", and "Use (hours/day)". The "Replacement Compact Fluorescent Light (CFL)" section has fields for "CFL Size (watts)" and "Additional Cost (\$/bulb)". On the right side, there is a vertical panel with buttons: "Run Audit", "Last Run On", "Not Run", and "at". At the bottom left, there is a "LIGHTING SYSTEM" section with a dropdown menu "by Light Code" and a list of items (1) with "New", "Copy", and "Del" buttons. A "Comment" field is also present. At the bottom of the window, there is a footer: "Short code for the lighting system (must be unique for this Job) [Default LT1 (TAB on blank field to accept)]" and "NUM".

The screenshot shows the MHEA Audit software interface. At the top, there is a menu bar with options: File, Edit, View, Insert, Format, Records, Window, Help. Below the menu bar is a toolbar with various icons. The main window is titled "MHEA Audit" and contains several input fields: "Audit Name" (Audit (1)), "Client ID" (Client (1)), "Client Name", and "Alt. Client ID". Below these fields are several tabs: "Audit Information", "Status", "Shell (0)", "Addition (0)", "Heating (0)", "Cooling (0)", "Ducts/Infiltration", "Baseloads", "Health & Safety", "Itemized Costs (0)", "Utility Bills (0)", "Photos (0)", and "Measures (0)". The "Health & Safety" tab is selected, showing a "Whole House" section with "Equipment" and "Building Shell" sub-sections. Under "Building Shell", there are two checkboxes: "Smoke Detector is Needed" and "CO Monitor is Needed", both of which are unchecked. Below these are "Carbon Monoxide Measurements" with four input fields: "Room with Heating System (ppm)", "Room with Water Heater (ppm)", "Living Area (ppm)", and "Kitchen (ppm)". A "Comment" field is also present. On the right side of the window, there is a "Run Audit" button and a "Last Run On" field with a "Not Run at" button. A red box highlights the "Smoke Detector is Needed" and "CO Monitor is Needed" checkboxes, with arrows pointing to them from a text box. The text box contains the following text: "Smoke and CO detectors must be entered under the health and safety library drop down box." and "This is an optional entry of carbon monoxide (CO) readings. All carbon monoxide test results must be collected on the 'Heating System and Hot Water Heater Improvement Survey Report'." The status bar at the bottom of the window shows "Smoke detectors are needed" on the left and "NUM" on the right.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

MHEA Audit

Audit Name Client ID Client Name Alt. Client ID

Audit Information | Status | Shell (0) | Addition (0) | Heating (0) | Cooling (0) | Ducts/Infiltration | Baseloads | Health & Safety | Itemized Costs (0) | Utility Bills (0) | Photos (0) | Measures (0)

Whole House | Equipment | Building Shell

Worse Case Condition Draft Measurements

Space Heating System(s) (0)

Water Heating (0)

Wood Stove/Fireplace

Wood Stove/Fireplace is Present

Improper Venting

Combustion Air is Inadequate

Clothes Dryer

Improper Venting

Comment

Is there a wood stove in the home?

Cook Stove

CO Measurement Oven (ppm)

CO Measurement Burner 1 (ppm)

CO Measurement Burner 2 (ppm)

CO Measurement Burner 3 (ppm)

CO Measurement Burner 4 (ppm)

Gas Leak Present

Exhaust Fans

Bathrooms	Kitchen
Missing <input type="checkbox"/>	Missing <input type="checkbox"/>
Not Operational <input type="checkbox"/>	Not Operational <input type="checkbox"/>
Improper Venting <input type="checkbox"/>	Improper Venting <input type="checkbox"/>

Run Audit

Last Run On

Not Run at

Above section entry is optional.

- Cook stove carbon monoxide measurements must be entered on the "[Data Collection/Health & Safety Assessment](#)".
- Worse Case combustion appliance drafting measurements must be collected on the "[Heating System and Hot Water Heater Survey Report](#)".
- Exhaust Fan information must be entered on the "[ASHRAE 62.2-2013 Auditor/Inspector Checklist](#)" and the [Calculation Sheet](#). Exhaust Fan repair, replacement and or installment, must be entered under the Health and Safety Library drop down box.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

MHEA Audit

Audit Name **Audit (1)** Client ID Client (1) Client Name Alt. Client ID

Audit Information Status Shell (0) Addition (0) Heating (0) Cooling (0) Ducts/Infiltration Baseloads Health & Safety Itemized Costs (0) Utility Bills (0) Photos (0) Measures (0)

Whole House Equipment Building Shell

Attic

- Recessed Lights Present
- Chimney/Flue Shielding Incorrect
- Wiring Problems
- Ventilation Inadequate
- Water Leaks Present
- Moisture/Mold Problems Evident
- Other Problems

Walls

- Wiring Problems
- Water Leaks Present
- Moisture/Mold Problems Evident
- Other Problems

Crawlspace

- Vapor Barrier Needed
- Wiring Problems
- Water Leaks Present
- Plumbing Leaks Present
- Moisture/Mold Problems Evident
- Other Problems

Run Audit

Last Run On

Not Run at

Comment

**Above section entry is optional.
The information above must be entered on the ["Data Collection/Health & Safety Assessment"](#).**

The attic space has recessed ceiling lights NUM

Choose Health and Safety Measure from drop down box. Enter cost of measure including material and labor. Do not check box "Include in SIR".
Note: Health and Safety measures should appear at the bottom of the Recommended Measure Report.

Incidental Repairs can only be entered as a measure if deemed necessary for the effectiveness of one or more ECM's. Enter cost of measure including material and labor. Check the "Include in SIR" box.

Note: A comment must be added to this section indicating the ECM address by the measure.

LED Lighting can be entered as a measure. Cost, annual savings and should be entered the "Include in SIR" box should be checked off. Please see section 1.3 for further guidance.

Utility bill entry is optional. Not a mandatory section.

#	Month	Day	Usage	Degree Days
0	0	0	0	0

Record: 1 of 1


UTILITY BILLS

by Period [dropdown]

1 of 1 New Del

Heating or cooling bills (the combination of Type and Period must be unique for this Job)

NUM

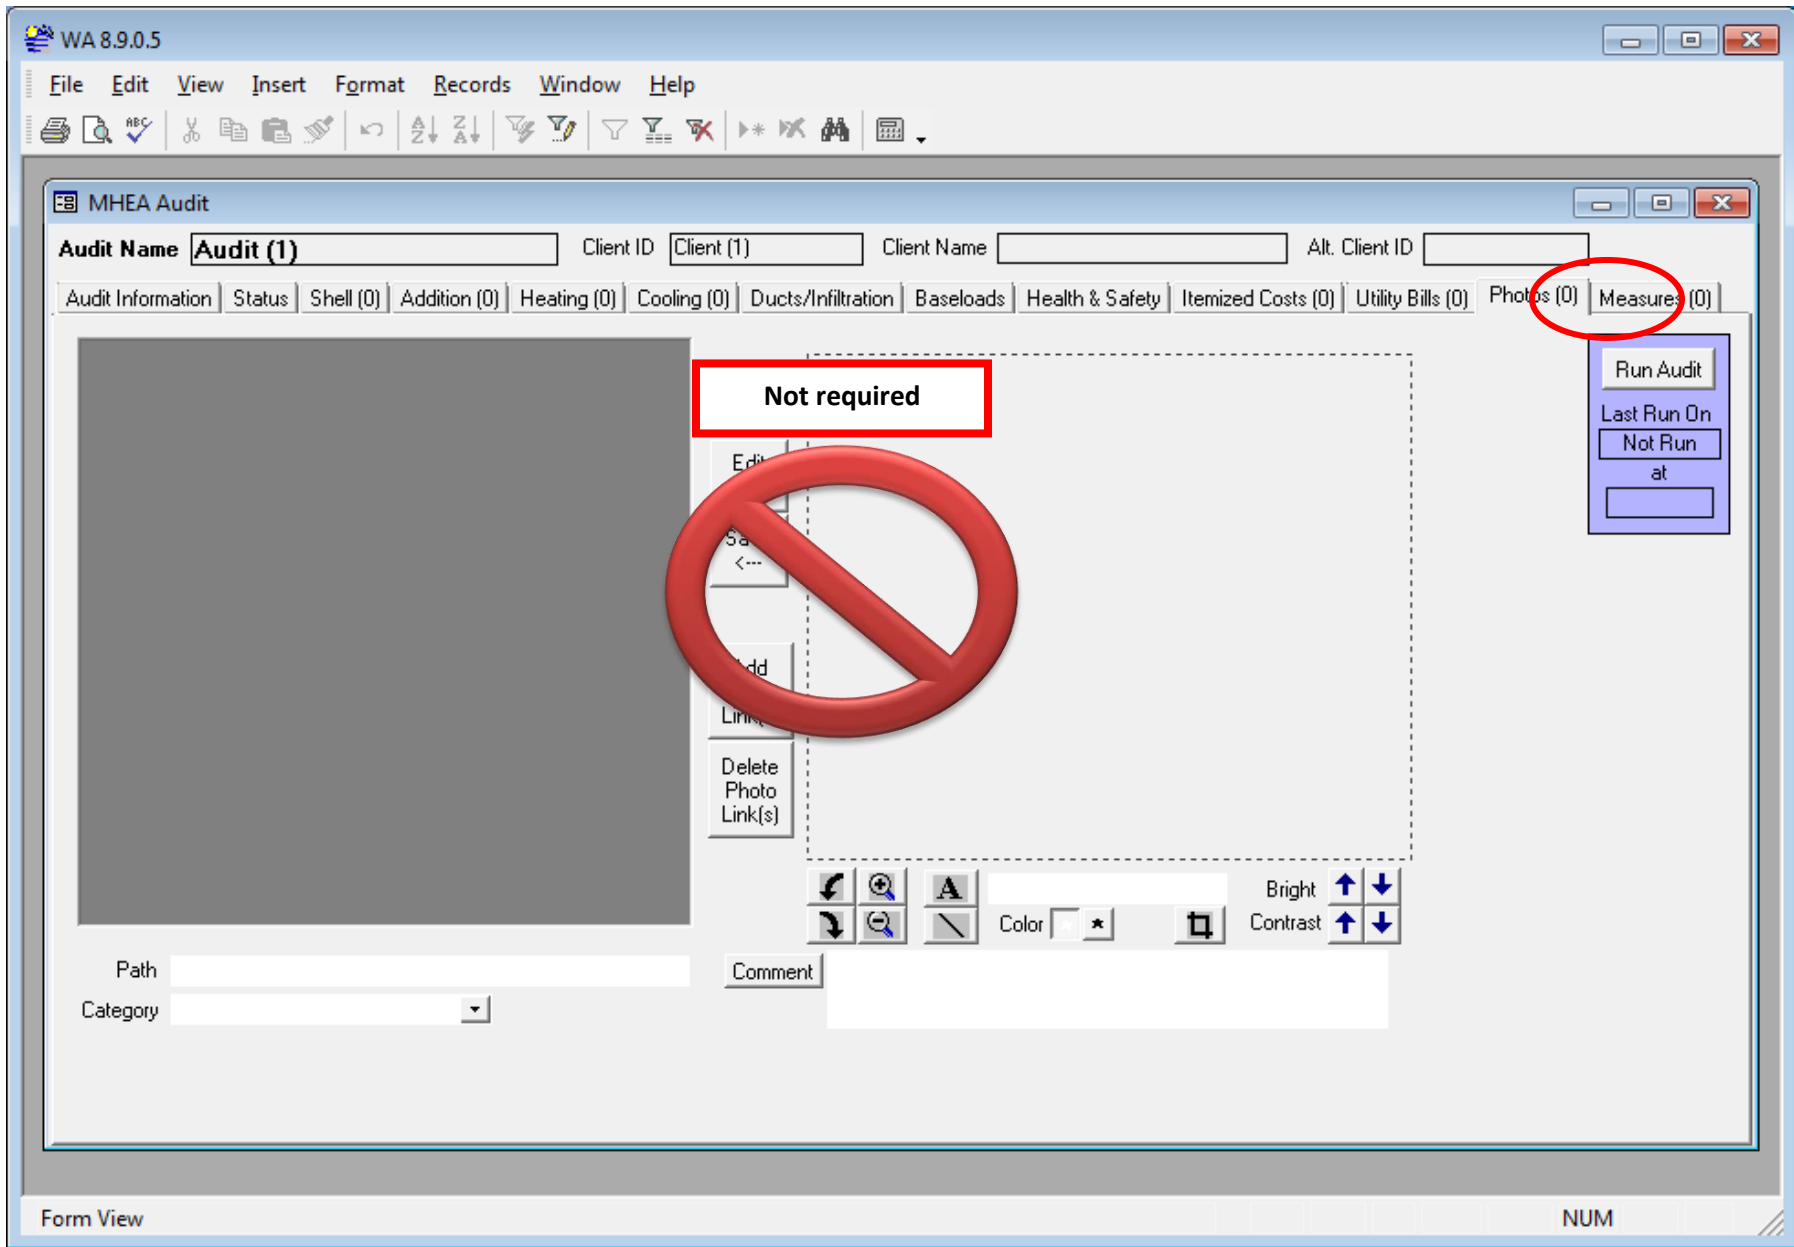

When developing your audit library, please note that the following measures can be turned off:

NEAT

- R49 Insulation Measures- turn off.
- Window sealing – turn off so that caulking, weather-stripping, and sealing windows that aren't receiving any other window treatment (replacement) are just air sealed as part of general infiltration work.
- Storm windows – turn off
- Window replacement – turn off. Turn on Low-e window.
- Window shading (awning) – turn off. Primarily used in southern climates.
- Heating system measures (thermal vent damper, electric vent damper, IID, electric vent damper with IID, flame retention burner, furnace tune up, high efficiency furnace, and high efficiency boiler) - turn off. Use Home Energy and or Heating Improvement Program funds.
- Smart thermostat - turn off only if handled under Home Energy and or HIP.
- Cooling system measures (tune AC, replace AC, evaporative cooler, and install/replace heat pumps) – turn off. Use HIP funding with OLIEC approval only.
- Water heater replacement – turn off. Use Home Energy and or HIP funding.

If HIP funding is not available, turn on “Heating system and or Water heater measures”. If replacement/repair is recommended under a shell grant (LIHEAP/DOE). The measure must have a Savings to Investment Ratio (SIR) of 1% or greater to proceed. If the measure is considered a health and safety measure attached to a LIHEAP/DOE job, it must be justified under Chapter 3 policy protocols.

MHEA

- Wall/Floor/Roof insulation measures – Turn off cellulose insulation. Leave fiberglass insulation on.
- Replace marked door mandatory – if not cost effective as a retrofit measure, can be done as general air sealing if air leakage around the door is excessive (must be justified with photo documentation of pre-condition).
- Window sealing – turn off so that caulking, weather-stripping, and sealing windows that aren't receiving any other window treatment (replacement) are just air sealed as part of general infiltration work.
- Plastic storm windows – turn off.
- Glass storm windows – turn off.
- Awnings and shade screens – turn off. Primarily used in southern climates.
- White roof coating – turn off. Primarily used in southern climates.
- Heating system measures (thermal vent damper, electric vent damper, IID, electric vent damper with IID, flame retention burner, furnace tune up, high efficiency furnace, and high efficiency boiler) - turn off. Use Home Energy and or Heating Improvement Program funds.
- Smart thermostat - turn off only if handled under Home Energy and or HIP.
- Cooling system measures (tune AC, replace AC, evaporative cooler, and install/replace heat pumps) – turn off. Use HIP funding with OLIEC approval only.
- Water heater replacement – turn off. Use Home Energy and or HIP funding.

If HIP funding is not available, turn on “Heating system and or Water heater measures”. If replacement/repair is recommended under a shell grant (LIHEAP/DOE). The measure must have a Savings to Investment Ratio (SIR) of 1% or greater to proceed. If the measure is considered a health and safety measure attached to a LIHEAP/DOE job, it must be justified under Chapter 3 policy protocols.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Setup Library

Library Name **Your Setup Library** References

Setup Library Information | Key Parameters | Fuel Costs (1) | Fuel Price Indices | Library Measures | User Defined Measures (0) | NEAT Insulation Types

Library Name **Your Setup Library**

Agency **Your Agency** State **US**

<Supply Library> **Your Supply Library**

Description

Comment

SETUP LIBRARY

by Library Name

1 of 1 New Copy Del

REPORT

Select Report **Library Measure Costs**

Preview Print Snapshot File

All **bold outlined boxes** must have entry information.

Navigate to this Record NUM

The screenshot shows the 'Setup Library' dialog box in the WA 8.9.0.5 software. The 'Library Name' is 'Your Setup Library'. The 'Set Points' tab is selected and circled in red. The table below shows the following data:

Name	Value	Units
Real discount rate	8	%
Minimum acceptable SIR	1	Factor

A red callout box with an arrow pointing to the table contains the text: "These values remain the same. Do not alter."

At the bottom of the dialog, there is a 'NEAT' section with a 'VIEW' button and a dropdown menu showing 'Site Built (NEAT) Key Parameters'. The status bar at the bottom of the window displays 'Numeric value of the defined parameter' and 'NUM'.

The screenshot shows the 'Setup Library' dialog box in the WA 8.9.0.5 software. The 'Library Name' is 'Your Setup Library'. The 'Insulation' tab is selected and circled in red. Below the tabs is a table with the following data:

Name	Value	Units
▶ Heating setpoint (daytime)	68	deg F
Heating setpoint (nighttime)		deg F
Cooling setpoint (daytime)	78	deg F
Cooling setpoint (nighttime)	78	deg F
Night setback	3	deg F

At the bottom of the dialog, there is a 'NEAT' section with a 'VIEW' button and a dropdown menu showing 'Site Built (NEAT) Key Parameters'. The status bar at the bottom of the window displays 'Numeric value of the defined parameter' and 'NUM'.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Library Name: **Your Setup Library**

Setup Library Information | Key Parameters | Fuel Costs (1) | Fuel Price Indices | Library Measures | User Defined Measures (0) | NEAT Insulation Types

Economics | Set Points | **Insulation** | Equipment | Windows

Name	Value	Units
Avg annual outside film coeff	2.25	BTU/hr-sqft-F
Uninsulated R-value for 'Other' wall type	4.42	F-sqft-hr/Btu
R-value for 'Other' exterior siding type"	0.6	F-sqft-hr/Btu
R-value per Inch for the 'Other' existing ceiling insulation type	3.09	F-sqft-hr/Btu-in
Added duct insulation R value	7	F-sqft-hr/Btu
Water heater wrap added R value	7	F-sqft-hr/Btu
Base value of free heat from internals	2600	BTU/hr

Record: 1 of 7

NEAT
VIEW Site Built (NEAT) Key Parameters

Numeric value of the defined parameter NUM

"Duct insulation and Water heater wrap R values" should be updated based on "NJ Field Guide/Material Standards".

The screenshot shows the 'Setup Library' dialog box in the WA 8.9.0.5 software. The 'Equipment' tab is selected and circled in red. The dialog box contains a table of parameters with the following data:

Name	Value	Units
Window A/C replacement SEER	11	Btu/wh
Central A/C replacement SEER	13	Btu/wh
Heat pump replacement SEER (Cooling)	13	Btu/wh
SEER used to impute cooling savings	13	na
Low flow shower head flow rate	2.5	gal/min
Refrigerator defrost cycle energy	0.08	kWh

Below the table, the record navigation shows 'Record: 1 of 6'. At the bottom of the dialog, there is a 'VIEW' button and a dropdown menu set to 'Site Built (NEAT) Key Parameters'. The status bar at the bottom of the main window displays 'Numeric value of the defined parameter' and 'NUM'.

WA 8.9.0.5

File Edit View Insert Format Records Window Help

Setup Library

Library Name **Your Setup Library** References

Setup Library Information Key Parameters Fuel Costs (1) Fuel Price Indices Library Measures User Defined Measures (0) NEAT Insulation Types

Economics Set Points Insulation Equipment **Windows**

Name	Value	Units
▶ Replacement Window U-Value	0.46	Btu/F-sqft-hr
Replacement Window Solar Heat Gain Coefficient	0.62	na
Replacement LowE Window U-Value	0.42	Btu/F-sqft-hr
Replacement LowE Window Solar Heat Gain Coefficient	0.42	na
Retrofit Storm Window Emittance	0.82	na
Retrofit Storm Window Solar Heat Gain Coefficient	0.89	na
Retrofit Window Film Surface Emittance	0.84	na
Retrofit Window Film Solar Heat Gain Coefficient (incl frame)	0.49	na

Record: 1 of 8

NEAT

VIEW Site Built (NEAT) Key Parameters

Numeric value of the defined parameter NUM

Windows Enter data which describes the replacement windows you have in your inventory. Most of the information requested can be found on the new window label.

- Enter the U-Value of the Replacement Window.

Library Name Your Setup Library

Fuel Cost Table Name Default Costs

Comment Average National Fuel Costs

Fuel Type	In Units of	Unit Cost	Heat Content (MMBtu)
Natural Gas	Mcf	14.230	1.000000
Oil	Gallon	3.710	0.140000
Electricity	kWh	0.110	0.003413
Propane	Gallon	2.600	0.090000
Wood	Cord	13.000	20.200000
Coal	Ton	16.000	21.000000
Kerosene	Gallon	3.710	0.130000
Other	MMBtu	1.250	1.000000

FUEL COSTS

by Name [dropdown]

1 of 1 Copy Del

Fuel Costs: This is where you enter the various fuel cost rates in your area. If the agency has multiple service areas with different fuel costs you can give each set of fuel prices a name and any number of fuel cost sets can be added to the setup library.

DO NOT ALTER the Heat Content (MMBtu).

Conversion required: the unit cost per therm x 10.25 = Mcf

Name of the fuel costs record (e.g. a utility) NUM

The screenshot shows the 'Setup Library' dialog box in the WA 8.9.0.5 software. The 'Fuel Price Indices' tab is selected and circled in red. The table below shows the price index values for Natural Gas from year 0 to 22. A red box highlights a warning text box on the right side of the dialog.

Fuel Type	Year	Price Index	UPW Factor
Natural Gas	0	1.00	1.00
Natural Gas	1	0.97	0.94
Natural Gas	2	0.97	1.85
Natural Gas	3	0.96	2.73
Natural Gas	4	0.96	3.58
Natural Gas	5	0.97	4.42
Natural Gas	6	0.98	5.24
Natural Gas	7	1.00	6.05
Natural Gas	8	1.01	6.85
Natural Gas	9	1.03	7.64
Natural Gas	10	1.05	8.42
Natural Gas	11	1.07	9.19
Natural Gas	12	1.09	9.96
Natural Gas	13	1.11	10.71
Natural Gas	14	1.13	11.46
Natural Gas	15	1.14	12.19
Natural Gas	16	1.16	12.92
Natural Gas	17	1.17	13.62
Natural Gas	18	1.18	14.32
Natural Gas	19	1.19	15.00
Natural Gas	20	1.20	15.66
Natural Gas	21	1.22	16.32
Natural Gas	22	1.23	16.96

Fuel Price Indices: DO NOT MODIFY. This tab shows the fuel price escalation index values for each fuel for the current year out to 25 years. These values are based on US average fuel price escalation factors released by the Energy Information Agency (EIA).

Fuel price escalation Rate factor (multiplier to previous year's fuel cost) NUM

Weatherization agencies must update libraries immediately when prices for materials and/or labor have changed.

#	Measure Type	Measure Name	Active	Default Contractor	Default Cost Center	Life (yr)	Costs
1	Building Insulation	Attic insulation R11	<input checked="" type="checkbox"/>			20	Costs
2	Building Insulation	Attic insulation R19	<input checked="" type="checkbox"/>			20	Costs
3	Building Insulation	Attic insulation R30	<input checked="" type="checkbox"/>			20	Costs
4	Building Insulation	Attic insulation R38	<input checked="" type="checkbox"/>			20	Costs
5	Building Insulation	Attic insulation R49	<input checked="" type="checkbox"/>			20	Costs
6	Building Insulation	Fill ceiling cavity	<input checked="" type="checkbox"/>			20	Costs
7	Building Insulation	Sillbox insulation	<input checked="" type="checkbox"/>			20	Costs
8	Building Insulation	White roof coating	<input checked="" type="checkbox"/>			7	Costs
9	Building Insulation	Foundation wall insulation	<input checked="" type="checkbox"/>			20	Costs
10	Building Insulation	Floor insulation R11	<input checked="" type="checkbox"/>			20	Costs
11	Building Insulation	Floor insulation R19	<input checked="" type="checkbox"/>			20	Costs
12	Building Insulation	Floor insulation R30	<input checked="" type="checkbox"/>			20	Costs
13	Building Insulation	Floor insulation R38	<input checked="" type="checkbox"/>			20	Costs

Life (yr.) of measure must remain as the default setting unless approved by OLIEC.

You can use the Active flag to turn on/off the consideration of individual measures. Measures that are deactivated must be justified in the comment section of that specific measure.

All Library Measure Costs-Selecting the All Library Measure Costs button presents you with a form view of all measures' costing components in a single window. See below for Cost Detail for all library measures.

Cost Detail for all library measures

NEAT	MHEA	#	Description	Type	Units	Unit\$	<Comment>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1	Attic Insulation -Cellulose, Blown - R-11		SqFt	0.11	ENTER COST BY UNIT WITH MATERIAL
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1			SqFt	0.22	AS THE TOP COST
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1			Each Attic	0.00	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1	Attic Insulation -Fiberglass, Blown - R-11		SqFt	0.14	Material Cost
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1			SqFt	0.22	Labor Cost
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1			Each Attic	0.00	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2	Attic Insulation -Cellulose, Blown - R-19		SqFt	0.19	COST FOR INSULATION NEED TO INCREASE
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2			SqFt	0.38	AS R-VALUE INCREASES
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2			Each Attic	0.00	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2	Attic Insulation -Fiberglass, Blown - R-19		SqFt	0.22	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2			SqFt	0.38	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2			Each Attic	0.00	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3	Attic Insulation -Cellulose, Blown - R-30		SqFt	0.30	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3			SqFt	0.60	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3			Each Attic	0.00	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3	Attic Insulation -Fiberglass, Blown - R-30		SqFt	0.33	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3			SqFt	0.60	

Record: 9 of 332

The screenshot shows the 'Setup Library' window with the following details:

- Library Name:** Your Setup Library
- References:** User Defined Measures (0) (highlighted with a red circle)
- Setup Library Information:** Key Parameters, Fuel Costs (1), Fuel Price Indices, Library Measures, NEAT Insulation Types
- Measure #:** [blank] **Active:** **Include In SIR:** **Energy Savings:** No EnergySavings
- MeasureType:** [dropdown]
- Measure Name:** [text box]
- Default Contractor/Crew:** [dropdown]
- Default Cost Center:** [dropdown]
- Materials/Labor Details:** Available for Use In: Site Built Mobile Home
- Table:**

#	Type^	Copy Supply^	Description	Qty	Units+	\$/Unit	<Comment>
1				1.00		0.00	
- MEASURES:** by Description [dropdown], 1 of 1, New, Copy, Del
- VIEW:** Site Built (NEAT) Measures (indicated by a red arrow)
- Buttons:** All User Measure Costs

User Defined Measures: This tab provides you with the optional feature of defining custom measures and costing. The Itemized Cost tab on the audit form is where these measures can be automatically added to an audit. The "Available for use in" check boxes are used to specify which audits (NEAT or MHEA or both) the measure applies to. A separate category of predefined measures addressing health and safety issues is also available for editing. The VIEW combo in the bottom left of the form is used to switch the view between different categories of records. You cannot copy or delete the health and safety records but they can be edited.

This just controls the display order on forms and reports (blank = default sorting by Name in forms and SIR in reports) NUM

Setup Library
 Library Name: References

Setup Library Information | Key Parameters | Fuel Costs (1) | Fuel Price Indices | Library Measures | User Defined Measures (0) | **NEAT Insulation Types**

Attic			Knee Wall		Wall		
Type	Name	Rs/Inch	Name	R-Value	Name	Value	Units
Type 1	<input type="text" value="Blown Cellulose"/>	3.75	<input type="text" value="Fiberglass Batts"/>	13	<input type="text" value="Blown Cellulose"/>	3.71	<input type="text" value="R/in"/>
Type 2	<input type="text" value="Blown Fiberglass"/>	3.09					<input type="text" value="R"/>
Type 3							<input type="text" value="R"/>
Type 4							<input type="text" value=""/>
Type 5							<input type="text" value=""/>
Type 6							<input type="text" value=""/>

User Defined Insulation Types: With this tab you can name and characterize insulation types for attic spaces, knee walls, walls, floors, sills, and foundation walls for use in the audit.

Floor		Sill		Foundation Wall		
Type	Name	Rs/Inch	Name	R-Value	R-Value	
Type 1	<input type="text" value="Fiberglass Batts"/>	3.33	<input type="text" value="Fiberglass Batts"/>	19	<input type="text" value="Rigid Foam Board"/>	12
Type 2						
Type 3						
Type 4						
Type 5						
Type 6						

Insulation type names can be up to 30 characters in length

R's per inch for the ceiling insulation [Min 1 ,Max 10] NUM

2.3. EA-QUIP

EA-QUIP is New Jersey's Weatherization audit tool which is used on 5 or more units. This audit determines economically optimal mixes of energy-saving measures for a given building and within a chosen budget, for which it uses retrofit and cost libraries. From the library of measures, the program chooses those which are applicable to the building under consideration and ranks them by decreasing savings-to-cost ratio. This ratio is defined for each retrofit as the life cycle savings (energy savings minus future maintenance and replacement costs over the user-selected time horizon for each retrofit) divided by the installed cost of the measure.

EA-QUIP provides preformatted energy and economics reports such as: Applicable Energy Conservation Measures rated by Life-Time savings per investment, Existing conditions, Energy savings, Savings and costs analysis, and an Investment Analysis report where measures are prioritized and ranked by saving to Investment Ratio (SIR). For energy auditors and energy policy makers who are more interested in the most desirable energy-saving combination of retrofits, EA-QUIP provides a three-stage automated process: the selection of retrofits, their economic optimization, and their predictive analysis. [[Building Energy Software Tools Directory](#)]

For multi-family buildings, all EA-QUIP audits must be reviewed by State Monitor followed by a physical site assessment to confirm the work indicated on the audit is required for the multi-family project. If the project will be funded through LIHEAP WX, WAP Agency can proceed to a bid upon State Monitor review being completed. If the project will be funded through DOE Annual funds, the project must be submitted to OLIEC for forwarding to USDOE for review and approval prior to any work commencing. WAP Agency must provide the following documents for submission to USDOE:

- Short narrative describing existing building (size, no. of units, envelope, building age, mechanical systems) and proposed improvements.
- Audit – EA-QUIP
 - Online EA-QUIP- WAP Agency must provide direct access to it with a password and userID.
 - If utilizing the old disc-based EA-QUIP then WAP Agency must print out a hard copy and scan -printout **MUST INCLUDE** the comparison of modeled vs. actual energy use.
- Field assessment notes and back-up calculations (if any).
- Any other documentation that was used to define the Scope of Work for the Project.
- Scope of Work for the Project including SIR for each measure and cumulative SIR.

The screenshot shows the user interface of the Energy Audit software. At the top left is the logo for the Association for Energy Affordability. The top navigation bar includes a 'Welcome' message, a search box, and icons for Home, Reports, Edit Profile, Admin, and Logout. Below this is a secondary navigation bar with tabs for SINGLE ENTRY COMPONENTS (highlighted), MULTIPLE ENTRY COMPONENTS, RETROFIT COSTS, BUILDING MODELING, HELP, FAQ, and MANAGE USER ACCESS.

On the left side, there is a table with the following data:

Building Data Last Updated On	F	in Mar 31, 2014 16:04:41 EDT
Reports Generated On	F	in Mar 31, 2014 16:05:27 EDT

Below this table is the heading "Building List -> Single Entry Components". The main area contains several icons representing different building components: Fuel Data, General, Infiltration, Economic-Fuel, Heating System, Control and Distribution, Appliance, and Lighting.

On the right side, there is a table titled "Single Entry Components" with the following data:

Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

A red-bordered box contains the following text: "Note: For small multifamily buildings, less than 25 units where the units are individually heated, DOE has accepted the use of the NEAT audit."

The screenshot displays the AEA Energy Affordability software interface. At the top, there is a navigation bar with the AEA logo and a 'Welcome' message. Below this is a menu with options: SINGLE ENTRY COMPONENTS (highlighted), MULTIPLE ENTRY COMPONENTS, RETROFIT COSTS, BUILDING MODELING, HELP, FAQ, and MANAGE USER ACCESS. The main content area is titled 'Building List -> Single Entry Components -> Heating Fuel Data'. It includes a table for 'Building Data Last Updated On' and 'Reports Generated On', both showing dates from 2014. Below this, there are filters for 'Fuel Units' (set to Therms), 'State' (New Jersey), and 'City'. A table lists fuel data entries with columns for 'Received Date', 'Quantity (Therms)', 'Bill(\$)', and 'Action'. To the right, a 'Billing Summary' section shows 'Fuel Period Analysis' for 396 days, with 'Total Fuel' of 12,979 Therms and a 'Total Fuel Bill Amount' of \$14,149.79. Below this is a 'Yearly Usage' table comparing 'Actual' and 'Normalized' values for 'Total Usage', 'Monthly Base Load', and 'Heating Degree Days'. At the bottom, a 'Billing Summary / Yearly Usage Edit History' table shows creation and update timestamps.

Building Data Last Updated On 11/31, 2014 16:04:41 EDT
Reports Generated On 11/31, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Heating Fuel Data
 Fuel data must be present for the period of at least 365 days.

Fuel Units : Therms State : New Jersey City :

CSV Export Add Data

Received Date (mm / dd / yyyy)	Quantity (Therms)	Bill(\$)	Action
04/22/2012	0.0	\$ 0.00	Delete
05/22/2012	667.232	\$ 813.25	Delete
06/22/2012	411.779	\$ 506.20	Delete
07/23/2012	429.411	\$ 529.20	Delete
08/21/2012	415.583	\$ 512.67	Delete
09/20/2012	566.783	\$ 646.89	Delete

Recalculate & Save Generate Report Delete All CSV Import Cancel

Billing Summary

Fuel Period Analysis: 396 days
Total Fuel: 12,979 (Therms)
Total Fuel Bill Amount: \$ 14,149.79
Average Fuel Cost: \$ 1.09

Heating Reference Temperature 65.0 Deg F

Yearly Usage


	Actual	Normalized
Total Usage	12,944	14,158
Monthly Base Load	421	421
Heating Degree Days	4663	5115

Billing Summary / Yearly Usage Edit History

Created By	2013 14:37:17 EDT
Updated By	2014 16:03:52 EDT 2013 15:53:38 EDT 2013 14:29:00 EDT 2013 13:59:49 EDT 2013 13:57:13 EDT

A minimum 12 months of fuel data consumption is required. The first entry should always be zeroed out. Press [HELP](#) at the top right corner of the page for further information.

Note: check with building management to see if there are multiple utility supplied. If so, additional fuel data must be entered to provide an accurate building model.



Welcome [Redacted]

[Home](#)
[Reports](#)
[Edit Profile](#)
[Admin](#)
[Logout](#)

SINGLE ENTRY COMPONENTS
MULTIPLE ENTRY COMPONENTS
RETROFIT COSTS
BUILDING MODELING
HELP
FAQ
MANAGE USER ACCESS

Building Data Last Updated On		11, 2014 16:04:41 EDT
Reports Generated On		11, 2014 16:05:27 EDT

Building List -> Single Entry Components -> General

[Previous Component](#) [Next Component](#)

Terrain	U--Urban	▼
Shielding	M--Moderate	▼
Ground Surface	T--Tar and Gravel	▼
Number Of Heated Floors (No.)	4.00	
Number Of Dwelling Units (No.)	21	
Average Heated Space Per Floor (sqft)	9078.00	
Ceiling Height (feet)	9.00	
Dwelling Mass	H--Heavy	▼
Cooling Equipment	N--None	▼
Comments	▲ ▼	

History

Created By		18, 2013 14:38:38 EDT
Updated By		121, 2013 15:33:10 EDT 121, 2013 15:33:02 EDT 121, 2013 15:12:02 EDT 121, 2013 15:10:49 EDT 121, 2013 15:00:13 EDT

Press **HELP** at the top right corner of the page for further information.

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

ASSOCIATION FOR ENERGY AFFORDABILITY

Welcome | Home | Reports | Edit Profile | Admin | Logout

SINGLE ENTRY COMPONENTS | MULTIPLE ENTRY COMPONENTS | RETROFIT COSTS | BUILDING MODELING | **HELP** | FAQ | MANAGE USER ACCESS

Building Data Last Updated On	I, 2014 16:04:41 EDT
Reports Generated On	I, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Infiltration

Previous Component | Next Component

Infiltration Measured	N--Not measured	←
Mechanical Ventilation	N--None	←
Comments		

Update | Cancel

History

Created By	18, 2013 14:38:44 EDT
Updated By	18, 2013 14:38:44 EDT

Press **HELP** at the top right corner of the page for further information.

Blower door testing is not required for 5+ units.

If mechanical ventilation is present it must be entered.

Single Entry Components	
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

ASSOCIATION FOR ENERGY AFFORDABILITY

Welcome [User Name]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS | MULTIPLE ENTRY COMPONENTS | RETROFIT COSTS | BUILDING MODELING | **HELP** | FAQ | MANAGE USER ACCESS

Building Data Last Updated On		31, 2014 16:04:41 EDT
Reports Generated On		31, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Economic-Fuel

Previous Component Next Component

Maximum Expenditure (\$)	144921.00
Real Discount Rate (%)	3.00
Master Electric Metering	N--No
Space Heating Fuel	G--Gas
Domestic Hot Water Fuel	G--Gas
Actual Heating Degree Days (Degdays)	4663
Actual Yearly Gas Use (therm)	12944.00
Actual Base Gas Use (therm/mo)	421.00
Gas Price (\$/therm)	1.09
Heating Fuel Price Escalation Rate (%)	0
Dhwh Fuel Price Escalation Rate (%)	0
Current Electricity Price (\$/kwh)	0.15
Consider Switching Electric Rates?	N--No
Comments	

Update Cancel

History

Created By	al 18, 2013 14:39:36 EDT
Updated By	lar 31, 2014 16:04:41 EDT

Callout Boxes:

- Press **HELP** at the top right corner of the page for further information.
- Enter the total maximum expenditure based on the eligible units.
- DO NOT ALTER:** Real Discount Rate must remain the default %.
- These entry sections will automatically fill based on the information entered into the FUEL DATA screen.
- DO NOT ALTER:** Heating/dhwh Fuel Escalation Rate must be 0 %.
- Obtain pricing from utility bills for the service area the multi-dwelling is located.

ASSOCIATION FOR ENERGY AFFORDABILITY

Welcome [User Name]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS MULTIPLE ENTRY COMPONENTS RETROFIT COSTS BUILDING MODELING HELP FAQ MANAGE USER ACCESS

Building Data Last Updated On 31, 2014 16:04:41 EDT
 Reports Generated On 31, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Heating System

Single Entry Components

Heating Equipment Type	P--Power Gas Boiler
Rated Input Capacity (mbtu/hr)	1984.00
Combustion Efficiency (%)	82.00
Measured Flue Carbon Dioxide (%)	6.50
Net Flue Gas Temperature (deg F)	469.00
Measured Flue Gas Draft (in. H20)	-2.00
Measured Flue Co (ppm)	5.00
Measured Ambient Co (ppm)	0
Barometric Damper	G--Good condition
Heating System Condition	G--Good w/clean heat transfer surfaces
Aquastat Condition	G--Good
Burner Condition	G--Good
Source Of Boiler Room Ventilation	B--Both Outside and Inside
Air Inlet Area (sqin)	2000.00

Update Cancel

History

Created By	[User Name]	8, 2013 14:41:24 EDT
Updated By	[User Name]	22, 2013 14:11:20 EDT 8, 2013 15:21:36 EDT 8, 2013 14:41:24 EDT

Lighting Yes

Multiple Entry Components

Press HELP at the top right corner of the page for further information.

**Input Capacity found on boiler plate. Only enter the number which represents millions (i.e. 1984 as opposed to 1,984,000).
If multiple units run simultaneously, add the input mbtu/hr. for a total capacity.**

**Enter heating system combustion measurements. Ensure the draft is accurate (negative/positive readings).
If multiple units run simultaneously, average out the collected measurements.**

The audit may recommend increasing boiler room ventilation. The result will be based on entered boiler's input mbtu/hr. and air inlet area in square inches.

The screenshot shows a web application interface for energy audits. At the top left is the logo for the Association for Energy Affordability. The top navigation bar includes 'Home', 'Reports', 'Edit Profile', 'Admin', and 'Logout'. Below the navigation bar are tabs for 'SINGLE ENTRY COMPONENTS' and 'MULTIPLE ENTRY COMPONENTS'. The main content area is titled 'Building List -> Single Entry Components -> Control and Distribution'. It contains a form with the following fields:

Building Data Last Updated On	11, 2014 16:04:41 EDT
Reports Generated On	11, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Control and Distribution

Previous Component Next Component

Type Of Distribution System	W--Hot water
Total Uninsulated Heating Pipe/duct Length (ft)	0
Type Of Heating Controls	I--Indoor thermostat(s)
Condition Of Sensor/Controls	G--Good
Number Of Sensors (No.)	1
Modulating Aquastat	W--Working
Heating Day Thermostat Setting (degF)	72.00
Heating Night Setting (degF)	67.00
Percent Of Dwelling Out Of Balance (%)	0
Comments	

Update Cancel

History

Created By	18, 2013 14:41:41 EDT
Updated By	18, 2013 14:41:41 EDT

On the right side of the interface, there is a diagram of a heating system. A yellow oval highlights a control panel on the diagram. A red box highlights a text box that says: "Press HELP at the top right corner of the page for further information." Below the diagram is a table with the following data:


Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

The screenshot shows the 'Single Entry Components' form for 'Appliance'. The form includes a header with the Association for Energy Affordability logo and navigation links (Home, Reports, Edit Profile, Admin, Logout). Below the header are tabs for 'SINGLE ENTRY COMPONENTS', 'MULTIPLE ENTRY COMPONENTS', 'RETROFIT COSTS', 'BUILDING MODELING', 'HELP', 'FAQ', and 'MANAGE USER ACCESS'. The main form area contains a table with the following fields:

Building Data Last Updated On	31, 2014 16:04:41 EDT
Reports Generated On	31, 2014 16:05:27 EDT
Building List -> Single Entry Components -> Appliance	
Avg Daytime Occupants In Dwelling (No.)	4
Avg Night Occupants In Dwelling (No.)	62
Total Daily Hot Water Use (gal/day)	1364.00
Number Of Showers In Dwelling (No.)	24
Percentage of Building with Low-Flow Fixtures (Showerheads and Faucet Aerators)(%)	0
Water Heater Type	I--Gas - insulated
Input Rating (mbtu/hr)	40.00
Condition of Water Heater	G--Good
Measured Combustion Efficiency (%)	85.00
Hot Water Temperature (degF)	130.00
Location Of Water Heater	B--Basement
Total Length Of Uninsulated DhW Pipes (ft)	0
Number of Apartments with In-Unit Laundry Dryers (No.)	0
Stove/Oven Type	G--Gas
Typical Refrigerator Type	M--Man. defrost & freezer
Number Of Refrigerators to Be Replaced (No.)	15
Average Annual Refrigerator Use of Refrigerators to be Replaced (KWh)	865.00
Number of Refrigerators NOT to be Replaced (No.)	9
Average Annual Refrigerator Use of Refrigerators NOT to be Replaced (KWh)	480.00
Comments	

Four callout boxes provide additional information:

- Top right:** Press **HELP** at the top right corner of the page for further information.
- Total Daily Hot Water Use:** Estimate hot water usage, based on dwelling occupants. Daily hot water use should be between 15 to 20 gal. a day per person living in dwelling.
- Water Heater Type:** If the heating system provides potable hot water then enter tank-less coil; then you can consider separating making it a stand-alone system.
- Measured Combustion Efficiency:** Enter hot water efficiency measurements. If multiple units run simultaneously, average out the collected measurement.
- Refrigerators:** A minimum of 10% of the total refrigerators proposed to be replaced in a multi-family dwelling must be metered with the line logger. Note: If tenants do not pay for electricity directly and do not own the existing refrigerator, the replacement should not be considered a priority. If the landlord wants replacements AND the energy audit recommendation supports the measure, leveraging applies. Landlords must pay 50% of the cost for replacements. Any measures ranked higher must be installed before refrigerator replacements.



Welcome [redacted]

[Home](#)
[Reports](#)
[Edit Profile](#)
[Admin](#)
[Logout](#)

SINGLE ENTRY COMPONENTS
MULTIPLE ENTRY COMPONENTS
RETROFIT COSTS
BUILDING MODELING
HELP
FAQ
MANAGE USER ACCESS

Building Data Last Updated On		31, 2014 16:04:41 EDT
Reports Generated On		31, 2014 16:05:27 EDT

Building List -> Single Entry Components -> Lighting [Previous Component](#)

Total Lighting Wattage Per Unit (watts)	<input type="text" value="240"/>
Hours On Of In-unit Space Lighting (hours)	<input type="text" value="4.00"/>
Percent In-unit Wattage Reduction (%)	<input type="text" value="67.00"/>
Avg Interior Public Lighting Wattage per Floor (watts)	<input type="text" value="120.00"/>
Hours On of Interior Public Lighting (hours)	<input type="text" value="24.00"/>
Percent Interior Public Wattage Reduction (%)	<input type="text" value="0"/>
Total Wattage of Exterior Public Lighting (watts)	<input type="text" value="0"/>
Hours On of Exterior Lighting (hours)	<input type="text" value="0"/>
Percent Exterior Public Wattage Reduction (%)	<input type="text" value="0"/>
Comments	<div style="border: 1px solid gray; height: 40px; width: 100%;"></div>

History

Created By		18, 2013 14:45:01 EDT
Updated By		18, 2013 14:45:01 EDT

Press **HELP** at the top right corner of the page for further information.

Note: LED lighting is now approved by DOE.

General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

The screenshot displays the AEA Energy Affordability software interface. At the top left is the AEA logo. The top navigation bar includes a 'Welcome' message, a search box, and icons for Home, Reports, Edit Profile, Admin, and Logout. Below this is a secondary navigation bar with tabs for SINGLE ENTRY COMPONENTS, MULTIPLE ENTRY COMPONENTS (highlighted), RETROFIT COSTS, BUILDING MODELING, HELP, FAQ, and MANAGE USER ACCESS.

On the left side, there is a table with building data:

Building Data Last Updated On	31, 2014 16:04:41 EDT
Reports Generated On	31, 2014 16:05:27 EDT

To the right of this table is a link for [Edit Building Information](#).

The main section is titled **Building List -> Multiple Entry Components**. It features five large icons representing building components: Walls, Windows, Doors, Roof, and Base.

On the right side, there are two tables summarizing component status:

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes

Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

The screenshot displays the user interface of the Energy Affordability software. At the top left is the logo for the Association for Energy Affordability. The top navigation bar includes a 'Welcome' message, a search box, and icons for Home, Reports, Edit Profile, Admin, and Logout. Below this is a secondary menu with options: SINGLE ENTRY COMPONENTS, MULTIPLE ENTRY COMPONENTS (highlighted), RETROFIT COSTS, BUILDING MODELING, HELP, FAQ, and MANAGE USER ACCESS.

The main content area shows building data:

Building Data Last Updated On	r 31, 2014 16:04:41 EDT
Reports Generated On	r 31, 2014 16:05:27 EDT

 An 'Edit Building Information' link is located to the right of this data.

The central section is titled 'Building List -> Multiple Entry Components -> Walls'. It contains a table:

Wall Name **	Action
Primary	Delete

 Links for 'Back' and 'Add' are positioned above the table. A note below the table states: '** At least one Wall Name must be 'Primary''.

To the right of the wall list is a 'Next Component' link and a table of component selection options:

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



SINGLE ENTRY COMPONENTS **MULTIPLE ENTRY COMPONENTS** RETROFIT COSTS BUILDING MODELING [HELP](#) FAQ MANAGE USER ACCESS

Building Data Last Updated On	<input type="text"/>	EDT
Reports Generated On	<input type="text"/>	EDT

Press **HELP** at the top right corner of the page for further information.

Building List -> Multiple Entry Components -> Walls -> Edit

Name Of Wall	<input type="text" value="Primary"/>
Wall Orientation	<input type="text" value="M--Multiple"/>
Azimuth Of North Face (degrees)	<input type="text" value="0"/>
Wall Type	<input brick"="" type="text" value="S--8"/>
Wall Insulation	<input type="text" value="F--Fiberglass batts"/>
Insulation Thickness (in)	<input type="text" value="4.00"/>
Insulatable Wall Thickness (in)	<input type="text" value="0"/>
North-facing Exterior Area (sqft)	<input type="text" value="3672.00"/>
East-facing Exterior Area (sqft)	<input type="text" value="3204.00"/>
South-facing Exterior Area (sqft)	<input type="text" value="3672.00"/>
West-facing Exterior Area (sqft)	<input type="text" value="3204.00"/>
Area Of Windows In Wall (sqft)	<input type="text" value="1290.00"/>
Area Of Doors In Wall (sqft)	<input type="text" value="120.00"/>
Air Leakage Through Wall	<input type="text" value="S--Small"/>
Area Of Any Hole In Wall (sqin)	<input type="text" value="0"/>
Comments	<input type="text"/>

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

This entry is critical for window orientation. Estimate how many degrees from true north.

As a reminder in this section, the window and door measurements are entered in square feet not inches.

Association for Energy Affordability (AEA) logo

Welcome [User Name]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS **MULTIPLE ENTRY COMPONENTS** RETROFIT COSTS BUILDING MODELING HELP FAQ MANAGE USER ACCESS

Building Data Last Updated On: [Date] 16:04:41 EDT

Reports Generated On: [Date] 16:05:27 EDT

[Edit Building Information](#)


Building List -> Multiple Entry Components -> Windows [Previous Component](#) [Next Component](#)

[Back](#) [Add](#)

Window Name **	Action
Primary	Delete
Good windows	Delete

** At least one Window Name must be 'Primary'

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



Welcome [User Name]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS **MULTIPLE ENTRY COMPONENTS** RETROFIT COSTS BUILDING MODELING **HELP** FAQ MANAGE USER ACCESS

Press HELP at the top right corner of the page for further information.

Building Data Last Updated On	
Reports Generated On	

Building List -> Multiple Entry Components -> Windows -> Edit


Name Of Windows	Primary
Window Orientation	M--Multiple
Window Type	D--Double hung
Glazing	S--Single pane
Curtains Blinds	S--Shades or Blinds
Average Sash Fit	L--Loose - poor/no weatherstrip
Physical Condition Of Frame	P--Poor
Cracks Between Frame Wall	L--Large
Area Of Any Holes In Windows (sqin)	0
Area Per Window (sqin)	1952.00
Number Of: North Windows (No.)	41
" Number Of: East Windows" (No.)	28
" Number Of: South Windows" (No.)	41
" Number Of: West Windows" (No.)	32
" December Solar Exposure - East" (%)	30.00
" December Solar Exposure - South" (%)	30.00
" December Solar Exposure - West" (%)	30.00
Replacement Window U-Value	0.50
Expected window air leakage reduction due to replacement	L--Large
Justification for Predicting Large or Very Large Expected Energy Savings from Window Replacement	Windows are loose, off track, strings are broken, wooden track is rotted out. It is not cost effective to do any repairs.

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
	Yes
	Yes
Base	Yes

As a reminder in this section, the window area is entered in as square inches.

Exposures need to be addressed. Press HELP for additional information.

Enter the U-Value of the Replacement Window.



Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS MULTIPLE ENTRY COMPONENTS RETROFIT COSTS BUILDING MODELING HELP FAQ MANAGE USER ACCESS

Building Data Last Updated On	4:41 EDT
Reports Generated On	:35 EDT

Building List -> Multiple Entry Components -> Windows -> Edit

Name Of Windows	<input type="text" value="Good windows"/>
Window Orientation	<input type="text" value="M--Multiple"/>
Window Type	<input type="text" value="D--Double hung"/>
Glazing	<input type="text" value="D--Double pane"/>
Curtains Blinds	<input type="text" value="S--Shades or Blinds"/>
Average Sash Fit	<input type="text" value="T--Tight"/>
Physical Condition Of Frame	<input type="text" value="G--Good"/>
Cracks Between Frame Wall	<input type="text" value="N--None"/>
Area Of Any Holes In Windows (sqin)	<input type="text" value="0"/>
Area Per Window (sqin)	<input type="text" value="1952.00"/>
Number Of: North Windows (No.)	<input type="text" value="4"/>
" Number Of: East Windows" (No.)	<input type="text" value="6"/>
" Number Of: South Windows" (No.)	<input type="text" value="5"/>
" Number Of: West Windows" (No.)	<input type="text" value="6"/>
Replacement Window U-Value	<input type="text" value="0.40"/>
Expected window air leakage reduction due to replacement	<input type="text" value="S--Small"/>
Comments	<div style="border: 1px solid gray; height: 60px; width: 100%;"></div>

Press **HELP** at the top right corner of the page for further information.

Note: If there are A/C Sleeves; select add component for a new window entry.

Single Entry Components	
Fuel Data	Yes
General	Yes
	Yes
	Yes
	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

ASSOCIATION FOR ENERGY AFFORDABILITY

Welcome [redacted]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS MULTIPLE ENTRY COMPONENTS RETROFIT COSTS BUILDING MODELING HELP FAQ MANAGE USER ACCESS

Building Data Last Updated On :31, 2014 16:04:41 EDT

Reports Generated On :31, 2014 16:05:27 EDT

[Edit Building Information](#)

Building List -> Multiple Entry Components -> Doors [Previous Component](#) [Next Component](#)

Door Name **	Action
Entrance	Delete
Back	Delete

[Back](#) [Add](#)

** At least one Door Name must be 'Entrance'

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



[SINGLE ENTRY COMPONENTS](#) **[MULTIPLE ENTRY COMPONENTS](#)** [RETROFIT COSTS](#) [BUILDING MODELING](#) [HELP](#) [FAQ](#) [MANAGE USER ACCE](#)

Building Data Last Updated On	
Reports Generated On	

Press **HELP** at the top right corner of the page for further information.

Building List -> Multiple Entry Components -> Doors -> Edit

Name Of Doors	Entrance
Door Type	P--Plain (Hinged) ▾
Door Material	G--Glass w/Metal or Wood Frame ▾
Storm Doors Or Vestibule	N--None ▾
Door Fit	T--Tight ▾
Number Of Doors (No.)	1
Area Per Door (sqft)	26.00
Approximate Glass Area (%)	50.00
Comments	<div style="border: 1px solid gray; height: 40px; width: 100%;"></div>

History

Created By	
Updated By	

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



[SINGLE ENTRY COMPONENTS](#) **[MULTIPLE ENTRY COMPONENTS](#)** [RETROFIT COSTS](#) [BUILDING MODELING](#) [HELP](#) [FAQ](#) [MANAGE USER ACCESS](#)

Building Data Last Updated On	<input type="text"/>
Reports Generated On	<input type="text"/>

Press **HELP** at the top right corner of the page for further information.

Building List -> Multiple Entry Components -> Doors -> Edit

Name Of Doors	<input type="text" value="Back"/>
Door Type	<input type="text" value="P--Plain (Hinged)"/>
Door Material	<input type="text" value="M--Hollow Metal"/>
Storm Doors Or Vestibule	<input type="text" value="N--None"/>
Door Fit	<input type="text" value="T--Tight"/>
Number Of Doors (No.)	<input type="text" value="4"/>
Area Per Door (sqft)	<input type="text" value="24.00"/>
Approximate Glass Area (%)	<input type="text" value="0"/>
Comments	<div style="border: 1px solid gray; height: 40px; width: 100%;"></div>

History

Created By	<input type="text"/>
Updated By	<input type="text"/>

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

Association for Energy Affordability

Welcome [Redacted]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS **MULTIPLE ENTRY COMPONENTS** RETROFIT COSTS BUILDING MODELING HELP FAQ MANAGE USER ACCESS

Building Data Last Updated On: 31, 2014 16:04:41 EDT
 Reports Generated On: 31, 2014 16:05:27 EDT

[Edit Building Information](#)

Building List -> Multiple Entry Components -> Roof [Previous Component](#) [Next Component](#)

[Back](#) [Add](#)

Roof Name **	Action
Primary	Delete

** At least one Roof Name must be 'Primary'

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



Home
Reports
Edit Profile
Admin
Logout

SINGLE ENTRY COMPONENTS
MULTIPLE ENTRY COMPONENTS
RETROFIT COSTS
BUILDING MODELING
HELP
FAQ
MANAGE USER ACCESS

Press **HELP** at the top right corner of the page for further information.

Building Data Last Updated On	<input style="width: 95%;" type="text"/>
Reports Generated On	<input style="width: 95%;" type="text"/>

Building List -> Multiple Entry Components -> Roof -> Edit

Name For Attic/roof	<input style="width: 95%;" type="text" value="Primary"/>
Roof Type	<input style="width: 95%;" type="text" value="F--Flat roof"/>
Insulation Type	<input style="width: 95%;" type="text" value="F--Fiberglass batts"/>
Insulation Thickness (in)	<input style="width: 95%;" type="text" value="6.00"/>
Insulatable Air Space (in)	<input style="width: 95%;" type="text" value="0"/>
Roof Area (sqft)	<input style="width: 95%;" type="text" value="8500.00"/>
No. Of Rooftop Windows (No.)	<input style="width: 95%;" type="text" value="0"/>
No. Of Rooftop Doors (No.)	<input style="width: 95%;" type="text" value="1"/>
No. Of Penetrations (No.)	<input style="width: 95%;" type="text" value="3"/>
Water Leakage Through Roof	<input style="width: 95%;" type="text" value="T--Tightly sealed"/>
Roof Top Material	<input style="width: 95%;" type="text" value="A--Asphalt Shingles or Sheeting"/>
Roof Color	<input style="width: 95%;" type="text" value="D--Dark"/>
Comments	<div style="border: 1px solid gray; height: 40px; width: 95%;"></div>



The sum of the roof area (Sq. ft.) should be about equal to the Average Heated Space per floor (Sq. ft.) Add comment if the structure has an unusual floor plan.

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes

Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

History

Created By	<input style="width: 85%;" type="text"/>
Updated By	<input style="width: 85%;" type="text"/>

The screenshot displays the 'Multiple Entry Components' section of the software. At the top, there is a navigation bar with the logo for 'ASSOCIATION FOR ENERGY AFFORDABILITY' and a 'Welcome' message. Below this is a menu with options: SINGLE ENTRY COMPONENTS, MULTIPLE ENTRY COMPONENTS (highlighted), RETROFIT COSTS, BUILDING MODELING, HELP, FAQ, and MANAGE USER ACCESS. The main content area includes a table for building data, a breadcrumb trail 'Building List -> Multiple Entry Components -> Base', and a table for 'Base' components. A right-hand sidebar lists 'Single Entry Components' and 'Multiple Entry Components' with 'Yes' or 'No' status indicators.

Building Data Last Updated On	31, 2014 16:04:41 EDT
Reports Generated On	31, 2014 16:05:27 EDT

[Edit Building Information](#)


Building List -> Multiple Entry Components -> Base [Previous Component](#)

Base Name **	Action
Primary	Delete

[Back](#) [Add](#)

** At least one Base Name must be 'Primary'

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes
Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes



SINGLE ENTRY COMPONENTS **MULTIPLE ENTRY COMPONENTS** RETROFIT COSTS BUILDING MODELING **HELP** FAQ MANAGE USER ACC

Building Data Last Updated On	<input type="text"/>
Reports Generated On	<input type="text"/>

Press **HELP** at the top right corner of the page for further information.

Building List -> Multiple Entry Components -> Base -> Edit

Base Name	<input type="text" value="Primary"/>
Base Type	<input type="text" value="B-Basement"/>
Base Insulation	<input type="text" value="N-No insulation"/>
Floor Area (sqft)	<input type="text" value="9078.00"/>
No. Of Floor Penetrations (No.)	<input type="text" value="12"/>
Base Wall Insulation	<input type="text" value="N-No insulation"/>
Above-grade Height (ft)	<input type="text" value="3.00"/>
Exterior Perimeter (ft)	<input type="text" value="382.00"/>
No. Of Windows (No.)	<input type="text" value="7"/>
No. Of Doors (No.)	<input type="text" value="2"/>
No. Of Leaky Penetrations (No.)	<input type="text" value="6"/>
Air Leakage Through Base	<input type="text" value="M-Moderate amount of leakage"/>
Area Of Windows To Be Sealed (sqft)	<input type="text" value="0"/>
R-value Of Window Seal (F-sqft/Btuh)	<input type="text" value="5.00"/>
Comments	<input type="text"/>

The sum of the floor area (Sq. ft.) should be about equal to the Average Heated Space per floor (Sq. ft.) Add comment if the structure has an unusual floor plan.


The foundation perimeter should be consistent with the floor area.

Single Entry Components	
Fuel Data	Yes
General	Yes
Infiltration	Yes

Multiple Entry Components	
Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

History

Created By	<input type="text"/>
Updated By	<input type="text"/>



La Casa De Don Pedro - NJ - New Community Sussex

Welcome David Padilla

Home
Reports
Edit Profile
Admin
Logout

SINGLE ENTRY COMPONENTS
MULTIPLE ENTRY COMPONENTS
RETROFIT COSTS
BUILDING MODELING
HELP
FAQ
MANAGE USER ACCESS

Building Data Last Updated On

Reports Generated On

SAMPLE Section of Retrofit Costs

[Edit Building Information](#)

Building List -> Retrofit Costs

Weatherization agencies must update fixed and/or per unit retrofit cost.

DO NOT ALTER; Service Life of measure must remain as the default setting.

Description	Existing Conditions	Units	Fixed Cost (\$)	Cost Per Unit (\$) **	Service Life of Measure
WEATHERSTRIP Windows	loose fit	each	0.00	50.00	13
WEATHERSTRIP Windows	average fit	each	0.00	50.00	13
STORM WINDOW (exterior)		sqft	0.00	10.00	20
REPLACE w/DbtThermal Pane	wood/alum frame	each	0.00	300.00	20
SEAL&INSULATE A/C Sleeve		sqft	0.00	4.00	13
REPAIR DbtThermal Glazing		sqft	100.00	1.30	20
WTHSTRIP Windows/SEAL frames	loose fit	each	0.00	50.00	13
WTHSTRIP Windows/SEAL frames	average fit	each	0.00	50.00	13

** Double Click on the Cost Per Unit field to specify material cost and labor cost.

Save
CSV Import
CSV Export

Single Entry Components

Fuel Data	Yes
General	Yes
Infiltration	Yes
Economic-Fuel	Yes
Heating System	Yes
Control and Distribution	Yes
Appliance	Yes
Lighting	Yes

Multiple Entry Components

Walls	Yes
Windows	Yes
Doors	Yes
Roof	Yes
Base	Yes

Association for Energy Affordability (AEA) logo

Welcome [redacted]

Home Reports Edit Profile Admin Logout

SINGLE ENTRY COMPONENTS MULTIPLE ENTRY COMPONENTS RETROFIT COSTS BUILDING MODELING **HELP** FAQ MANAGE USER ACCESS

Building Data Last Updated On	31, 2014 16:04:41 EDT
Reports Generated On	25, 2014 14:27:17 EDT

[Edit Building Information](#)

Building List -> Reports

Reports
Fuel Data
Building Information
Building Data
Building Data Comments
Energy Analysis of Existing Conditions
Energy Savings Measures
Savings And Costs Analysis
Investment Analysis
Building Modeling
Scope of Work
WAP Scope of Work
Retrofit Cost
Auto Check Report
Print / Export to Word
Post-Install Calculated Usage



Building Modeling



Building Address:

Building Modeling report and Fuel Usage Chart must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.


Auditor

Month	Calculated Fuel Use	Actual Fuel Use	DayTime Heat On-Time	NightTime Heat On-Time	Total Heating Load	Solar Gain	Infiltration	NH Electric **
	Therms	Therms	%	%	MMBtu	MMBtu	ac/hr	MWh
January	2,232.00	2,234.00	18.50	8.90	148.00	6.00	0.28	2.5
February	1,874.00	1,970.00	17.30	8.00	120.00	10.00	0.28	2.3
March	1,610.00	1,743.00	13.80	4.90	93.00	19.00	0.27	2.5
April	840.00	1,053.00	7.50	0.00	34.00	25.00	0.21	2.4
May	409.00	569.00	0.00	0.00	-9.00	34.00	0.19	2.5
June	396.00	421.00	0.00	0.00	-33.00	34.00	0.14	2.4
July	409.00	421.00	0.00	0.00	-41.00	33.00	0.14	2.5
August	409.00	421.00	0.00	0.00	-30.00	26.00	0.12	2.5
September	396.00	421.00	0.00	0.00	-9.00	19.00	0.14	2.4
October	610.00	847.00	6.60	0.00	30.00	13.00	0.18	2.5
November	1,355.00	1,400.00	12.90	2.50	73.00	7.00	0.22	2.4
December	2,024.00	2,010.00	17.40	7.10	128.00	6.00	0.28	2.5
Sum	12,764.00	13,510.00			502.00	232.00		29.4
Average	1,063.67	1,125.83	7.83	2.62	41.00	19.33	0.21	2.45

(**) NH Electric (Non-Heating Electric Use): includes EAEM (EA-Quip Applicable Electric Measures), cooling use and domestic use of electric.

See below fuel usage chart. Calculated and actual fuel usage should be about equal, if the audit was done properly.

Display Chart

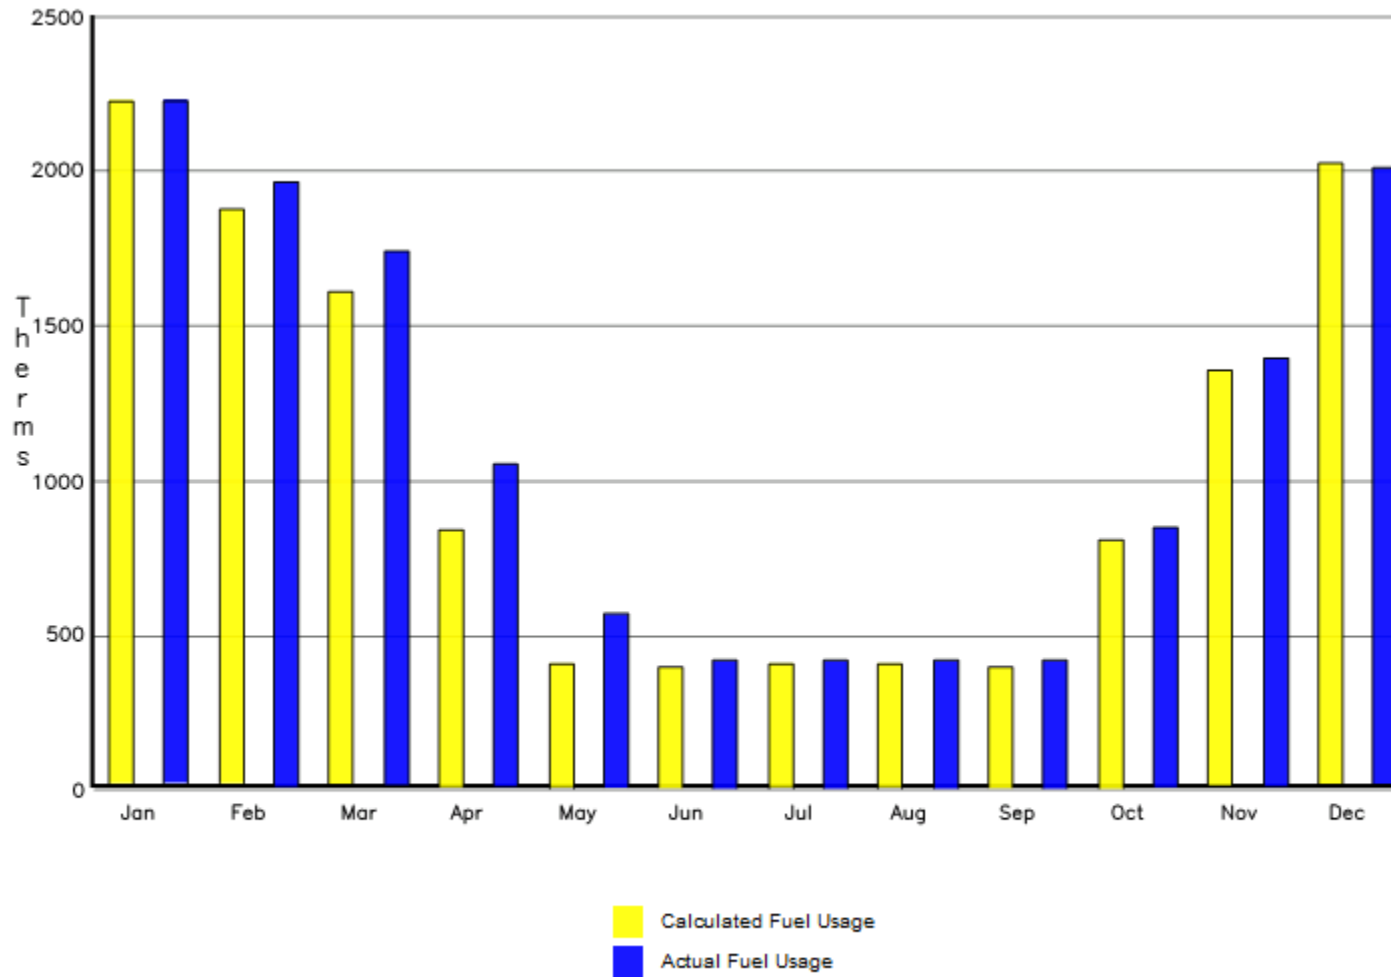

Back



Building Address:

Fuel Data report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auditor:

State: New Jersey

City:

Fuel Units: Therms

Heating Reference Temperature: 65 DegF

Billing Summary

Fuel Period Analysis:	396 Days
Total Fuel:	12,979.352 Therms
Total Fuel Bill Amount:	\$14,149.80
Average Fuel Cost:	\$1.09

Yearly Usage

	Actual	Normalized
Total Usage:	12,944	14,158
Monthly Base:	421	421
Heating Degree Days (HDD):	4,663	5,115

Date	Quantity (Therms)	Bill Amount (\$)
04/22/2012	0.0	0
05/22/2012	667.232	813.25
06/22/2012	411.779	506.20
07/23/2012	429.411	529.20
08/21/2012	415.583	512.67
09/20/2012	566.783	648.89
10/19/2012	878.26	945.04
11/19/2012	1280.525	1294.24
12/20/2012	1378.293	1600.80
01/23/2013	1645.07	1814.08
02/20/2013	1501.24	1568.23
03/22/2013	1906.56	1977.23
04/23/2013	1150.28	1152.62
05/23/2013	748.336	789.35



Building Information



Building Address:

Building Information input report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auditor

Auditor
Phone
Company
Reviewer
Audit Date

Owner

Owner
Phone
Fax

Superintendent

Superintendent
Phone
Other Contact

Agency

Agency
Contact
Phone



Building Address:

Building Data input report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auditor

GENERAL

Terrain	U--Urban
Shielding	M--Moderate
Ground Surface	T--Tar and Gravel
Number Of Heated Floors (No.)	4.00
Number Of Dwelling Units (No.)	21
Average Heated Space Per Floor (sqft)	9078.00
Ceiling Height (feet)	9.00
Dwelling Mass	H--Heavy
Cooling Equipment	N--None

INFILTRATION

Infiltration Measured	N--Not measured
Mechanical Ventilation	N--None
Cost of Ventilation Reduction (\$)	10000

ECONOMIC S&FUEL

Maximum Expenditure (\$)	144921.00
Real Discount Rate (%)	3.00
Master Electric Metering	N--No
Space Heating Fuel	G--Gas
Domestic Hot Water Fuel	G--Gas
Actual Heating Degree Days (Degdays)	4663
Actual Yearly Gas Use (therm)	12944.00
Actual Base Gas Use (therm/mo)	421.00
Gas Price (\$/therm)	1.09
Heating Fuel Price Escalation Rate (%)	0
Dhw Fuel Price Escalation Rate (%)	0
Current Electricity Price (\$/kwh)	0.15
Consider Switching Electric Rates?	N--No

HEAT-SYSTEM

Heating Equipment Type	P--Power Gas Boiler
Rated Input Capacity (mbtu/hr)	1984.00
Combustion Efficiency (%)	82.00
Measured Flue Carbon Dioxide (%)	6.50
Net Flue Gas Temperature (deg F)	469.00
Measured Flue Gas Draft (in. H2O)	-2.00
Measured Flue Co (ppm)	5.00
Measured Ambient Co (ppm)	0
Barometric Damper	G--Good condition
Heating System Condition	G--Good w/clean heat transfer surfaces
Auostat Condition	G--Good



Energy Analysis Of Existing Conditions



Building Address:

Auditor:

Seasons

Energy Analysis report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

The HEATING season is from October through May. The COOLING season is from June through September.

Physical

Total Living Space (sqft):	36312.00		Heating	Cooling
Number of Apartments:	21	Season Infiltration (cfm):	1341.20	802.45
Dwelling Volume (cuft):	326808.0	Air Exchange Rate (ach):	0.25	0.15

(BTU/Hr/degF)	Overall	Roof	Wall	Win & Doors	Base
Conduction	4078.46	388.24	766.56	2359.84	563.79
Infiltration	826.76	265.83	99.13	423.00	38.80
Total	4905.22	654.07	865.71	2782.84	602.59

(sqft)	North	East	South	West	Horizontal
Wtr Solar Aperture	331.71	252.76	337.55	279.17	86.76
Smr Solar Aperture	331.71	252.76	337.55	279.17	86.76

System & Economics

	Heating	Cooling	Water Heater	Electric
Day/Night Temp (degF)	72/67.0	78/60	130	-n/a-
Real Fuel Escalation(%)	0.00	0.00	0.00	0.00



Energy Savings Measures



Based On User Selected Retrofits

Building Address:

Auditor

Audit Date:

Original Operating Cost:

\$17,210.81 /yr

Savings In Operating Cost:

\$5,501.13 /yr

	Heating	Cooling	Water Heater	EAEM (*)
Original Building (MMBtu/yr)	794.83	0.00	374.50	101.63
Retrofitted Building(MMBtu/yr)	478.16	0.00	353.39	60.22
Energy Savings	39.84%	0.00%	5.64%	40.75%

(*) EAEM (EA-Quip Applicable Electric Measures): lighting and refrigerators eligible for replacement, range and dryers if electric.

Description	Location	Heating (%)	Cooling (%)	Water Heater (%)	Other Electric (%)
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	39.63	-	-	-
WTHSTRIP Windows/SEAL frames	Primary (Windows)	3.49	-	-	-
Replace apartment lighting	Lighting	-1.33	-	-	16.56
Install 386 kwh/yr REFRIGERATOR	Appliance	-1.95	-	-	24.13
LO-FLO showers & restrictors	Appliance	-	-	5.64	-



Energy Savings Measures



Based On System Defined Retrofits

Building Address:

Auditor:

Audit Date:

Original Operating Cost: \$17,210.81 /yr **Savings In Operating Cost:** \$5,501.13 /yr

	Heating	Cooling	Water Heater	EAEM (*)
Original Building (MMBtu/yr)	794.83	0.00	374.50	101.63
Retrofitted Building(MMBtu/yr)	478.16	0.00	353.39	60.22
Energy Savings	39.84%	0.00%	5.64%	40.75%

(*) EAEM (EA-Quip Applicable Electric Measures): lighting and refrigerators eligible for replacement, range and dryers if electric.

Description	Location	Heating (%)	Cooling (%)	Water Heater (%)	Other Electric (%)
Replace apartment lighting	Lighting	-1.33	-	-	16.56
LO-FLO showers & restrictors	Appliance	-	-	5.64	-
Install 388 kwh/yr REFRIGERATOR	Appliance	-1.95	-	-	24.13
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	39.63	-	-	-
WTHSTRIP Windows/SEAL frames	Primary (Windows)	3.49	-	-	-



Savings And Costs Analysis



Based On User Selected Retrofits

Building Address:

Auditor:

Audit Date:

Investment Cost:	\$54,773.90	Investment Limit:	\$144,921.00
Original Operating Cost:	\$17,210.81 /yr	Savings In Operating Cost:	\$5,498.56 /yr

	Energy Factor	EAEM + Cooling (*)
Original Building	6.91 BTU/sqft/HDD	29,776.04 kWh/yr
Retrofitted Building	4.91 BTU/sqft/HDD	17,643.78 kWh/yr
% Savings	28.89 %	40.75 %

*) EAEM(EA-Quip Applicable Electric Measures): lighting and refrigerators eligible for replacement, range and dryers if electric.

Description	Location	First Year savings (\$)	Initial Cost (\$)	Simple Payback (yrs)	Cumulative Cost (\$)
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	3433.27	39400.74	11.5 yr	39400.74
WTHSTRIP Windows/SEAL frames	Primary (Windows)	302.71	7100.00	23.5 yr	48500.74
Replace apartment lighting	Lighting	623.78	105.00	0.2 yr	48605.74
Install 386 kwh/yr REFRIGERATOR	Appliance	908.64	8100.00	8.9 yr	54705.74
LO-FLO showers & restrictors	Appliance	230.16	68.16	0.3 yr	54773.90



Savings And Costs Analysis



Based On System Defined Retrofits

Building Address:

Auditor:

Savings and Costs Analysis (System Defined Retrofit) report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Investment Cost:	\$54,773.90	Investment Limit:	\$144,921.00
Original Operating Cost:	\$17,210.81 /yr	Savings In Operating Cost:	\$5,498.56 /yr

	Energy Factor	EAEM + Cooling (*)
Original Building	6.91 BTU/sqft/HDD	29,776.04 kWh/yr
Retrofitted Building	4.91 BTU/sqft/HDD	17,643.78 kWh/yr
% Savings	28.89 %	40.75 %

(*) EAEM(EA-Quip Applicable Electric Measures): lighting and refrigerators eligible for replacement, range and dryers if electric.

Description	Location	First Year savings (\$)	Initial Cost (\$)	Simple Payback (yrs)	Cumulative Cost (\$)
Replace apartment lighting	Lighting	623.78	105.00	0.2 yr	105.00
LO-FLO showers & restrictors	Appliance	230.16	68.16	0.3 yr	173.16
Install 386 kwh/yr REFRIGERATOR	Appliance	908.64	8100.00	8.9 yr	8273.16
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	3433.27	39400.74	11.5 yr	47673.90
WTHSTRIP Windows/SEAL frames	Primary (Windows)	302.71	7100.00	23.5 yr	54773.90



Investment Analysis



Based On User Selected Retrofits

Building Address:

Auditor:

Audit Date:

Initial Investment: \$54,773.90 Investment Limit: \$144,921.00
 Real Discount Rate: 3.00 %

	Heating	Cooling	Water Heater	Other Electric
Type of equipment	P--Power Gas Boiler	N--None	I--Gas - insulated	
Fuel prices (\$/MMBtu)	10.90	43.94	10.90	43.94
Real Fuel Escalation (%)	0.00 %	0.00 %	0.00 %	0.00 %

Description	Location	Discounted Payback	Interest Rate of Return	S.I.R.
Replace apartment lighting	Lighting	0.2 yr	594.08 %	70.9
LO-FLO showers & restrictors	Appliance	0.3 yr	337.68 %	40.3
Install 386 kwh/yr REFRIGERATOR	Appliance	10.5 yr	9.06 %	1.6
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	14.3 yr	5.99 %	1.3
WTHSTRIP Windows/SEAL frames	Primary (Windows)	41.1 yr	-7.53 %	0.5



Investment Analysis



Based On System Defined Retrofits

Building Address:

Auditor:

Initial Investment: \$54,773.90 Investment Limit: \$144,921.00
 Real Discount Rate: 3.00 %


Investment Analysis (System Defined Retrofits) report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

	Heating	Cooling	Water
Type of equipment	P--Power Gas Boiler	N--None	I--Gas
Fuel prices (\$/MMBtu)	10.90	43.94	10.90
Real Fuel Escalation (%)	0.00 %	0.00 %	0.00 %

Only the measures with an S.I.R of 1.0% or greater are permitted to be part of the work scope.

 Unless, it is considered a health and safety measure; i.e. increasing mechanical ventilation.

Description	Location	Discounted Payback	Interest Rate of Return	S.I.R.
Replace apartment lighting	Lighting	0.2 yr	594.08 %	70.9
LO-FLO showers & restrictors	Appliance	0.3 yr	337.68 %	40.3
Install 386 kwh/yr REFRIGERATOR	Appliance	10.5 yr	9.06 %	1.6
REPLACE w/LowE argon-filled Thermal Pane	Primary (Windows)	14.3 yr	5.99 %	1.3
WTHSTRIP Windows/SEAL frames	Primary (Windows)	41.1 yr	-7.53 %	0.5

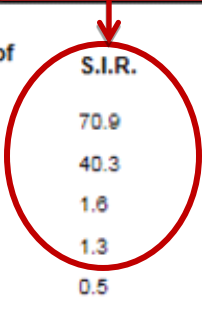



Building Address:

Retrofit Costs report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auditor:

GENERAL

Description	Existing Conditions	Units	Fixed Cost	Cost Per Unit	Service Life of Measure
Raise ambient cooling Temp 3 Deg F		each	10000.00	0.00	10
Raise ambient cooling Temp 5 Deg F		each	10000.00	0.00	10
Install 5 F Cooling night setback		each	1000.00	0.00	10
Install 10 F Cooling night setback		each	1000.00	0.00	10
Upgrade room air conditioners		each	0.00	360.00	13

INFILTRATION

Description	Existing Conditions	Units	Fixed Cost	Cost Per Unit	Service Life of Measure
SEAL house (Blower Door)		each	500.00	0.00	13

ECONOMIC-FUEL

Description	Existing Conditions	Units	Fixed Cost	Cost Per Unit	Service Life of Measure
SWITCH electric rates		each	0.00	0.00	0

HEATING SYSTEM

Description	Existing Conditions	Units	Fixed Cost	Cost Per Unit	Service Life of Measure
-------------	---------------------	-------	------------	---------------	-------------------------

Building Data Last Updated On: 31, 2014 16:04:41 EDT
 Reports Generated On: 25, 2014 14:35:43 EDT

Building List -> Reports -> Auto Check Report

Parameters	Value	Valid Range	Status	Comments
Floor area per apartment (sqft)	1457.14	400.0 < Value < 1250.0	Out Of Range	
Real Discount rate	3.0%	0.0 < Value < 4.0	OK	
Heating degree days	4663.0	4092 < Value < 6138	OK	
Heating fuel price escalation rate	0.0%	< 0.0	OK	
DHW fuel price escalation rate	0.0%	< 0.0	OK	
Electricity price escalation rate	N/A	< 0.0	N/A	
#2 oil cost	N/A	1.5 < Value < 4.5	N/A	

Comments

Save Cancel Generate Report

Auto Check Report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auto Check Report- If parameter status is out of range; ensure the value entered in to the specific parameter is correct. If it is, a comment must be added justifying the reason.



Post-Install Calculated Usage



Building Address:

Post-Install Calculated Usage report must be submitted to the Office of Low Income Energy Conservation for review and approval by the U.S. Department of Energy.

Auditor:

Month	Post-Install Calculated Fuel Usage Therms	Pre-Install Actual Fuel Usage Therms	DayTime Heat On-Time %	NightTime Heat On-Time %	Total Heating Load MMBtu	Solar Gain MMBtu	Infiltration ac/hr	NH Electric ** MWh
January	1,524.00	2,234.00	13.90	3.70	88.00	6.00	0.17	1.5
February	1,287.00	1,970.00	13.10	3.10	72.00	10.00	0.16	1.4
March	1,075.00	1,743.00	10.60	0.00	54.00	19.00	0.16	1.5
April	625.00	1,053.00	4.40	0.00	17.00	25.00	0.12	1.4
May	391.00	589.00	0.00	0.00	-9.00	34.00	0.11	1.5
June	379.00	421.00	0.00	0.00	-27.00	34.00	0.08	1.4
July	391.00	421.00	0.00	0.00	-33.00	33.00	0.08	1.5
August	391.00	421.00	0.00	0.00	-24.00	26.00	0.07	1.5
September	379.00	421.00	0.00	0.00	-9.00	19.00	0.08	1.4
October	626.00	847.00	4.10	0.00	16.00	13.00	0.10	1.5
November	927.00	1,400.00	9.00	0.00	43.00	7.00	0.13	1.4
December	1,393.00	2,010.00	13.20	2.40	76.00	6.00	0.16	1.5
Sum	9,388.00	13,510.00			264.00	232.00		17.5
Average	782.33	1,125.83	5.69	0.77	22.00	19.33	0.12	1.46

(**) NH Electric (Non-Heating Electric Use): includes EAEM (EA-Quip Applicable Electric Measures), cooling use and domestic use of electric.

3. Compliance Review

The State Monitors will be randomly selecting three to four completed energy audits for review every quarter. State Monitors will provide feedback to WAP agencies through a completed Audit Reviews Summary of Finding(s) Form which can be found in the [appendix](#). This serves several purposes:

1. Ensuring NJ homes are being weatherized based on quality and accurate audits.
2. Providing feedback on the quality of the energy audits which will identify weaknesses and need for training for field staff.
3. Reviews foster sharing of expertise among State Monitors and strengthening quality of monitoring.

WAP Agencies are required to correct deficiencies in audits within 30 calendar days of the receipt of the Audit Reviews Summary of Finding(s) Form.