



Insured: RICHARD O'REILLY
Property: 5 ISLAND VIEW WAY, UNIT 15
SEA BRIGHT, NJ 07760

Home: (732) 275-4321
E-mail: richardo@viewtrade.com

Claim Rep.: Stephen Welsh

E-mail: swelsh@gilbaneco.com

Estimator: Nicholas J. Mascitelli
Position: Project Engineer II
Company: Gilbane Building Company
Business: 4814 Outlook Drive
Wall Township, NJ 07753

Claim Number: RRE0005446

Policy Number:

Type of Loss: Hurricane

Date of Loss: 10/29/2012 12:00 AM Date Received:
Date Inspected: 12/19/2014 10:00 PM Date Entered: 12/19/2014

Price List: NJTR8X_DEC14_RREM_25
Restoration/Service/Remodel
Estimate: RRE0005446_REV1

Damage assessments are based upon information obtained during a visual, non-invasive and non-destructive inspection. Scope of Work for all repairs is as approved by DCA and HUD for repair of direct physical damages as a result of storm dated October 29, 2012 or as required by HUD housing quality standards .

Estimate may include hazardous material abatement costs if such items are noted and are considered allowable repairs.

Estimate may include limited repair or "upgrade" items beyond the scope of the primary project scope if requested by the homeowner and approved by the SSHIP contractor and NJDCA.

Gilbane reserves the right to amend this preliminary estimate upon the discovery of additional or unforeseen information. Estimate is based on direct observation of existing conditions approximately 6 months after the storm event, conversations with the homeowner, and documentation of flood requirements and repair history and other information as provided by SSHIP. Construction documents have not been provided nor relied upon in the development of this scope and estimate.

Note:
Wherever the term "**WIP**" is used in the narrative or the estimate, it shall stand for "work in progress " set aside for that specific area of work. The "WIP" is cash allowance and the estimate shall be adjusted either up or down once the actual costs are established.

There are various assumptions and qualifications necessary to clarify the scope of work. These assumptions and clarifications, as contained within the following narrative, shall form the basis for the specific scopes of work and this Estimate.




RRE0005446_REV1

Deck

Deck	DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>							
The exterior siding was replaced after the storm and paid for by the condo/townhome association.							
Total: Deck				0.00	0.00	0.00	0.00

Lower Level

Lower Level	DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>							
The exterior siding was replaced after the storm and paid for by the condo/townhome association.							
	2. R&R Smoke detector	1.00	EA	77.70	5.44	83.14	(0.00) 83.14
	3. Rewire - average residence - copper wiring	579.25	SF	4.04	163.81	2,503.98	(0.00) 2,503.98
	4. R&R Outlet	14.00	EA	23.16	22.69	346.93	(0.00) 346.93
	5. Bonding/Grounding clamp	1.00	EA	5.13	0.36	5.49	(0.00) 5.49
	6. R&R #4 gauge copper wire - stranded or solid	30.00	LF	3.00	6.30	96.30	(0.00) 96.30
	7. R&R Grounding rod - copper clad with clamp, 8'	2.00	EA	159.36	22.31	341.03	(0.00) 341.03
	8. Telephone backerboard	1.00	EA	565.74	39.60	605.34	(0.00) 605.34
	9. R&R Breaker panel - 150 amp w/arc fault breakers	1.00	EA	2,294.26	160.60	2,454.86	(0.00) 2,454.86
	10. R&R Circuit breaker - main disconnect - 150 to 200 amp	1.00	EA	257.71	18.04	275.75	(0.00) 275.75
	11. R&R Water heater - 40 gallon - Gas - 6 yr	1.00	EA	1,038.47	72.70	1,111.17	(0.00) 1,111.17
	12. R&R Flexible gas supply line connector - 1/2" - 25" to 48"	4.00	EA	62.22	17.42	266.30	(0.00) 266.30
	13. R&R Furnace - horizontal - forced air - 48 - 75,000 BTU	1.00	EA	2,207.84	154.55	2,362.39	(0.00) 2,362.39
	14. Central air conditioning system - 3 ton - 14-15 SEER	1.00	EA	4,003.71	280.26	4,283.97	(0.00) 4,283.97
	15. Block - 4" x 8" x 16" - in place	14.00	SF	6.20	6.08	92.88	(0.00) 92.88
	16. Condenser pad - 24" x 24"	1.00	EA	68.19	4.77	72.96	(0.00) 72.96
	17. Caulking - acrylic	200.00	LF	2.29	32.06	490.06	(0.00) 490.06
WIP Totals:				1006.99	15,392.55		15,392.55
Total: Lower Level				1,006.99	15,392.55	0.00	15,392.55




Garage

Height: 8'

526.43 SF Walls	243.50 SF Ceiling
769.92 SF Walls & Ceiling	243.50 SF Floor
27.06 SY Flooring	65.80 LF Floor Perimeter
65.80 LF Ceil. Perimeter	

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP						
19. R&R Batt insulation - 4" - R13 - unfaced batt	263.21	SF 1.20	22.11	337.96	(0.00)	337.96
20. R&R Batt insulation - 6" - R19 - paper faced	243.50	SF 1.69	28.81	440.33	(0.00)	440.33
21. R&R 5/8" drywall - type C - hung, taped, light texture	769.92	SF 2.73	147.13	2,249.01	(0.00)	2,249.01
22. R&R Exterior door - metal - insulated - flush or panel style	1.00	EA 341.98	23.94	365.92	(0.00)	365.92
23. Door lockset & deadbolt - exterior	1.00	EA 110.28	7.72	118.00	(0.00)	118.00
24. Prime & paint door slab only - exterior (per side)	2.00	EA 39.69	5.56	84.94	(0.00)	84.94
25. Paint door/window trim & jamb - 2 coats (per side)	2.00	EA 26.69	3.74	57.12	(0.00)	57.12
WIP Totals:			239.01	3,653.28		3,653.28
Totals: Garage			239.01	3,653.28	0.00	3,653.28



L/R 0

Height: 7' 6"

349.17 SF Walls	159.78 SF Ceiling
508.95 SF Walls & Ceiling	159.78 SF Floor
17.75 SY Flooring	46.00 LF Floor Perimeter
51.00 LF Ceil. Perimeter	

Missing Wall - Goes to Floor


5' X 6' 8"

Opens into W_D

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP						
26. R&R Batt insulation - 4" - R13 - unfaced batt	120.00	SF 1.20	10.08	154.08	(0.00)	154.08
27. R&R 1/2" drywall - hung, taped, floated, ready for paint	349.17	SF 2.59	63.31	967.66	(0.00)	967.66
28. Seal/prime then paint the walls and ceiling twice (3 coats)	508.95	SF 1.03	36.70	560.92	(0.00)	560.92
29. R&R Baseboard - 3 1/4"	46.00	LF 3.90	12.56	191.96	(0.00)	191.96
30. Paint baseboard - two coats	46.00	LF 1.19	3.83	58.57	(0.00)	58.57
31. R&R 6-0 6-8 vinyl sliding patio door	1.00	EA 933.29	65.33	998.62	(0.00)	998.62
32. R&R Casing - 2 1/4"	21.00	LF 2.93	4.31	65.84	(0.00)	65.84
33. Paint door or window opening - Large - 2 coats (per side)	1.00	EA 30.99	2.17	33.16	(0.00)	33.16

CONTINUED - L/R 0

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
34. R&R Interior door unit	1.00	EA 209.00	14.63	223.63	(0.00)	223.63
35. Door knob - interior	1.00	EA 52.51	3.68	56.19	(0.00)	56.19
36. Paint door/window trim & jamb - 2 coats (per side)	2.00	EA 26.69	3.74	57.12	(0.00)	57.12
37. Paint door slab only - 2 coats (per side)	2.00	EA 26.80	3.75	57.35	(0.00)	57.35
38. Remove Tile floor covering	159.78	SF 2.94	32.88	502.63	(0.00)	502.63
39. Remove 1/4" Cement board	159.78	SF 0.98	10.96	167.54	(0.00)	167.54
40. Carpet	183.75	SF 3.69	47.46	725.50	(0.00)	725.50
15% added for excess material for installation						
41. Carpet pad	159.78	SF 0.71	7.94	121.38	(0.00)	121.38
WIP Totals:			323.33	4,942.15		4,942.15
Totals: L/R 0			323.33	4,942.15	0.00	4,942.15



W/D

Height: 7' 6"

- | | |
|---------------------------|--------------------------|
| 130.42 SF Walls | 25.28 SF Ceiling |
| 155.69 SF Walls & Ceiling | 25.28 SF Floor |
| 2.81 SY Flooring | 16.83 LF Floor Perimeter |
| 21.83 LF Ceil. Perimeter | |

Missing Wall - Goes to Floor


5' X 6' 8"

Opens into L_R_0

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP						
42. R&R 1/2" drywall - hung, taped, floated, ready for paint	130.42	SF 2.59	23.64	361.43	(0.00)	361.43
43. Seal/prime then paint the walls and ceiling twice (3 coats)	155.69	SF 1.03	11.23	171.59	(0.00)	171.59
44. R&R Baseboard - 3 1/4"	16.83	LF 3.90	4.60	70.24	(0.00)	70.24
45. Paint baseboard - two coats	16.83	LF 1.19	1.40	21.43	(0.00)	21.43
46. Remove Door opening (jamb & casing) - 60" or wider - paint grade	1.00	EA 7.38	0.52	7.90	(0.00)	7.90
47. Remove Bifold door set - Colonist - Double	1.00	EA 17.59	1.23	18.82	(0.00)	18.82
52. Remove Tile floor covering	25.28	SF 2.94	5.20	79.52	(0.00)	79.52
53. Remove 1/4" Cement board	25.28	SF 0.98	1.73	26.50	(0.00)	26.50
54. Vinyl floor covering (sheet goods)	29.07	SF 4.06	8.26	126.28	(0.00)	126.28
15 % waste added for Vinyl floor covering (sheet goods).						
55. Underlayment - 1/4" lauan/mahogany plywood	25.28	SF 2.00	3.54	54.10	(0.00)	54.10
56. R&R Vinyl - metal transition strip	5.00	LF 4.81	1.69	25.74	(0.00)	25.74

CONTINUED - W/D

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP Totals:			63.04	963.55		963.55
Totals: W/D			63.04	963.55	0.00	963.55



hall 0

Height: 8'


242.73 SF Walls	43.48 SF Ceiling
286.21 SF Walls & Ceiling	43.48 SF Floor
4.83 SY Flooring	30.34 LF Floor Perimeter
30.34 LF Ceil. Perimeter	

Missing Wall

3' 2 1/8" X 8'

Opens into STAIRS

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP						
57. R&R 1/2" drywall - hung, taped, floated, ready for paint	242.73 SF	2.59	44.01	672.68	(0.00)	672.68
58. Seal/prime then paint the walls and ceiling twice (3 coats)	286.21 SF	1.03	20.64	315.44	(0.00)	315.44
59. R&R Baseboard - 3 1/4"	30.34 LF	3.90	8.29	126.61	(0.00)	126.61
60. Paint baseboard - two coats	30.34 LF	1.19	2.53	38.63	(0.00)	38.63
61. R&R Interior door unit	1.00 EA	209.00	14.63	223.63	(0.00)	223.63
62. Door knob - interior	1.00 EA	52.51	3.68	56.19	(0.00)	56.19
63. Paint door/window trim & jamb - 2 coats (per side)	2.00 EA	26.69	3.74	57.12	(0.00)	57.12
64. Paint door slab only - 2 coats (per side)	2.00 EA	26.80	3.75	57.35	(0.00)	57.35
65. Remove Tile floor covering	43.48 SF	2.94	8.95	136.78	(0.00)	136.78
66. Remove 1/4" Cement board	43.48 SF	0.98	2.98	45.59	(0.00)	45.59
67. Carpet	50.00 SF	3.69	12.92	197.42	(0.00)	197.42
15% added for excess material for installation						
68. Carpet pad	43.48 SF	0.71	2.16	33.03	(0.00)	33.03
WIP Totals:			128.28	1,960.47		1,960.47
Totals: hall 0			128.28	1,960.47	0.00	1,960.47



Missing Wall


Stairs

Height: 11' 9"

94.13 SF Walls	14.82 SF Ceiling
108.95 SF Walls & Ceiling	27.39 SF Floor
3.04 SY Flooring	11.23 LF Floor Perimeter
9.50 LF Ceil. Perimeter	

3' 2 1/8" X 11' 9"

Opens into HALL_0



Missing Wall


Subroom: Stairs2 (1)

Height: 11' 9"

112.88 SF Walls	13.50 SF Ceiling
126.38 SF Walls & Ceiling	25.38 SF Floor
2.82 SY Flooring	13.96 LF Floor Perimeter
12.00 LF Ceil. Perimeter	

3' X 11' 9"

Opens into STAIRS1



Missing Wall

Subroom: Stairs1 (2)

Height: 10' 6"

141.86 SF Walls	22.78 SF Ceiling
164.63 SF Walls & Ceiling	22.78 SF Floor
2.53 SY Flooring	13.51 LF Floor Perimeter
13.51 LF Ceil. Perimeter	

3' X 10' 6"


Opens into STAIRS2

Missing Wall

3' 2 1/8" X 10' 6"

Opens into STAIRS

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
WIP						
69. R&R 1/2" drywall - hung, taped, floated, ready for paint	348.87	SF 2.59	63.25	966.83	(0.00)	966.83
70. Seal/prime then paint the walls and ceiling twice (3 coats)	399.97	SF 1.03	28.84	440.81	(0.00)	440.81
71. R&R Baseboard - 3 1/4"	38.70	LF 3.90	10.56	161.49	(0.00)	161.49
72. Paint baseboard - two coats	38.70	LF 1.19	3.22	49.27	(0.00)	49.27
73. Remove Carpet	75.55	SF 0.33	1.75	26.68	(0.00)	26.68
74. R&R Carpet pad	37.78	SF 0.85	2.25	34.36	(0.00)	34.36
75. Carpet	43.44	SF 3.69	11.22	171.51	(0.00)	171.51
15% added for excess material for installation						
76. Step charge for "waterfall" carpet installation	7.00	EA 7.85	3.85	58.80	(0.00)	58.80
WIP Totals:			124.94	1,909.75		1,909.75
Totals: Stairs			124.94	1,909.75	0.00	1,909.75



bath 0

Height: 8'

205.33 SF Walls	31.67 SF Ceiling
237.00 SF Walls & Ceiling	31.67 SF Floor
3.52 SY Flooring	25.67 LF Floor Perimeter
25.67 LF Ceil. Perimeter	

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>						
79. R&R 1/2" water rock - hung, taped, floated, ready for paint	205.33	SF 2.69	38.66	591.00	(0.00)	591.00
80. Seal/prime then paint the walls and ceiling twice (3 coats)	237.00	SF 1.03	17.09	261.20	(0.00)	261.20
81. R&R Baseboard - 3 1/4"	25.67	LF 3.90	7.01	107.12	(0.00)	107.12
82. Paint baseboard - two coats	25.67	LF 1.19	2.14	32.69	(0.00)	32.69
83. R&R Interior door unit	1.00	EA 209.00	14.63	223.63	(0.00)	223.63
84. Door knob - interior	1.00	EA 52.51	3.68	56.19	(0.00)	56.19
85. Paint door/window trim & jamb - 2 coats (per side)	2.00	EA 26.69	3.74	57.12	(0.00)	57.12
86. Paint door slab only - 2 coats (per side)	2.00	EA 26.80	3.75	57.35	(0.00)	57.35
87. R&R Towel bar	1.00	EA 40.02	2.80	42.82	(0.00)	42.82
88. Remove Tile floor covering	31.67	SF 2.94	6.52	99.63	(0.00)	99.63
89. Remove 1/4" Cement board	31.67	SF 0.98	2.17	33.21	(0.00)	33.21
90. Vinyl floor covering (sheet goods)	36.42	SF 4.06	10.35	158.22	(0.00)	158.22
15 % waste added for Vinyl floor covering (sheet goods).						
91. Underlayment - 1/4" lauan/mahogany plywood	31.67	SF 2.00	4.43	67.77	(0.00)	67.77
92. R&R Vinyl - metal transition strip	3.00	LF 4.82	1.02	15.48	(0.00)	15.48
93. R&R Medicine cabinet	1.00	EA 225.29	15.77	241.06	(0.00)	241.06
94. R&R Vanity	1.50	LF 171.91	18.05	275.92	(0.00)	275.92
95. R&R Vanity top - one sink - cultured marble	1.50	LF 109.34	11.48	175.50	(0.00)	175.50
96. Sink faucet - Bathroom	1.00	EA 198.53	13.90	212.43	(0.00)	212.43
97. R&R P-trap assembly - ABS (plastic)	1.00	EA 71.76	5.02	76.78	(0.00)	76.78
98. Detach & Reset Toilet	1.00	EA 263.43	18.44	281.87	(0.00)	281.87
99. R&R Angle stop valve	3.00	EA 42.44	8.91	136.23	(0.00)	136.23
100. R&R Plumbing fixture supply line	3.00	EA 27.40	5.75	87.95	(0.00)	87.95
101. R&R Fiberglass shower unit	1.00	EA 1,022.14	71.55	1,093.69	(0.00)	1,093.69
102. R&R Shower faucet	1.00	EA 297.09	20.79	317.88	(0.00)	317.88
WIP Totals:			307.65	4,702.74		4,702.74
Totals: bath 0			307.65	4,702.74	0.00	4,702.74
Area WIP Total:			2,193.24	33,524.49		33,524.49
Totals: Lower Level			2,193.24	33,524.49	0.00	33,524.49

Main Level


Main Level

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>						
The exterior siding was replaced after the storm and paid for by the condo/townhome association.						
Total: Main Level			0.00	0.00	0.00	0.00

Upper Level

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>						
The exterior siding was replaced after the storm and paid for by the condo/townhome association.						
Total: Upper Level			0.00	0.00	0.00	0.00


Roof



Roof1

724.96 Surface Area	7.25 Number of Squares
97.50 Total Perimeter Length	13.92 Total Ridge Length

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>						
Roof 1 was replaced due to storm. This was financially covered by homeowner association.						
Totals: Roof1			0.00	0.00	0.00	0.00



Roof2

202.99 Surface Area	2.03 Number of Squares
60.90 Total Perimeter Length	7.83 Total Ridge Length

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
<u>WIP</u>						
Roof 2 was replaced due to storm. This was financially covered by homeowner association.						

CONTINUED - Roof2

DESCRIPTION	QTY	UNIT PRICE	TAX	RCV	DEPREC.	ACV
Totals: Roof2			0.00	0.00	0.00	0.00
Area WIP Total:			2,193.24	33,524.49		33,524.49
Line Item Totals: RRE0005446_REV1			2,193.24	33,524.49	0.00	33,524.49

Grand Total Areas:

5,731.98 SF Walls	2,275.29 SF Ceiling	8,007.27 SF Walls and Ceiling
2,388.22 SF Floor	265.36 SY Flooring	851.73 LF Floor Perimeter
0.00 SF Long Wall	0.00 SF Short Wall	811.51 LF Ceil. Perimeter
2,388.22 Floor Area	2,533.57 Total Area	4,795.51 Interior Wall Area
3,511.61 Exterior Wall Area	406.15 Exterior Perimeter of Walls	
927.95 Surface Area	9.28 Number of Squares	315.80 Total Perimeter Length
21.75 Total Ridge Length	0.00 Total Hip Length	



Summary for WIP

Line Item Total	31,331.25
Total Tax(Rep-Maint)	2,193.24
Replacement Cost Value	\$33,524.49
Net Claim	\$33,524.49

Nicholas J. Mascitelli
Project Engineer II



Recap of Taxes

	Total Tax(Rep-Maint) (7%)	Clothing Acc Tax (7%)	Storage Rental Tax (7%)
Line Items	2,193.24	0.00	0.00
Total	2,193.24	0.00	0.00



Recap by Room

Estimate: RRE0005446_REV1

Area: Lower Level	14,385.56	45.91%
Garage	3,414.27	10.90%
L/R 0	4,618.82	14.74%
W/D	900.51	2.87%
hall 0	1,832.19	5.85%
Stairs	1,784.81	5.70%
bath 0	4,395.09	14.03%
<hr/>		
Area Subtotal: Lower Level	31,331.25	100.00%
<hr/>		
Subtotal of Areas	31,331.25	100.00%
<hr/>		
Total	31,331.25	100.00%



Recap by Category

Items	Total	%
CABINETRY	449.18	1.34%
GENERAL DEMOLITION	3,500.30	10.44%
DOORS	877.49	2.62%
DRYWALL	4,425.85	13.20%
ELECTRICAL	5,074.10	15.14%
ELECTRICAL - SPECIAL SYSTEMS	565.74	1.69%
FLOOR COVERING - CARPET	1,248.91	3.73%
FLOOR COVERING - VINYL	411.23	1.23%
FINISH CARPENTRY / TRIMWORK	578.47	1.73%
FINISH HARDWARE	300.57	0.90%
HEAT, VENT & AIR CONDITIONING	6,200.59	18.50%
INSULATION	677.45	2.02%
MASONRY	86.80	0.26%
MARBLE - CULTURED OR NATURAL	161.69	0.48%
MOISTURE PROTECTION	458.00	1.37%
PLUMBING	3,117.52	9.30%
PAINTING	2,307.62	6.88%
WINDOWS - SLIDING PATIO DOORS	889.74	2.65%
Subtotal	31,331.25	93.46%
Total Tax(Rep-Maint)	2,193.24	6.54%
Total	33,524.49	100.00%

Estimate Closing statement

This estimate contains only NJ DCA RREM approved scope .

This estimate may contain cost information from actual invoices presented by the homeowner and reviewed by Gilbane for cost and scope. This cost data will only be used in an advisory fashion to determine homeowner eligibility for benefits.

This transmission is intended exclusively for the individual or entity to which it is addressed. This communication may contain information that is confidential, proprietary, privileged or otherwise exempt from disclosure. If you are not the named addressee, you are NOT authorized to read, print, retain, copy or disseminate this communication, its attachments or any part of them. If you have received this communication in error, please notify the sender immediately and delete this communication from all computers.

- 1 Elevation Costs - RRE0005446
Date Taken: 12/19/2014



- 2 Elevation Costs - RRE0005446 (20)
Date Taken: 12/19/2014



- 3 Elevation Costs - RRE0005446 (21)
Date Taken: 12/19/2014



- 4 Elevation Costs - RRE0005446 (22)
Date Taken: 12/19/2014



- 5 Elevation Costs - RRE0005446 (23)
Date Taken: 12/19/2014



- 6 Elevation Costs - RRE0005446 (24)
Date Taken: 12/19/2014



7 Deck/Deck1 - RRE0005446 (105)
Date Taken: 12/19/2014




8 Deck/Deck1 - RRE0005446 (106)
Date Taken: 12/19/2014



9 Deck/Deck1 - RRE0005446 (107)
Date Taken: 12/19/2014



10 Lower Level/Garage -
RRE0005446 (35)
Date Taken: 12/19/2014

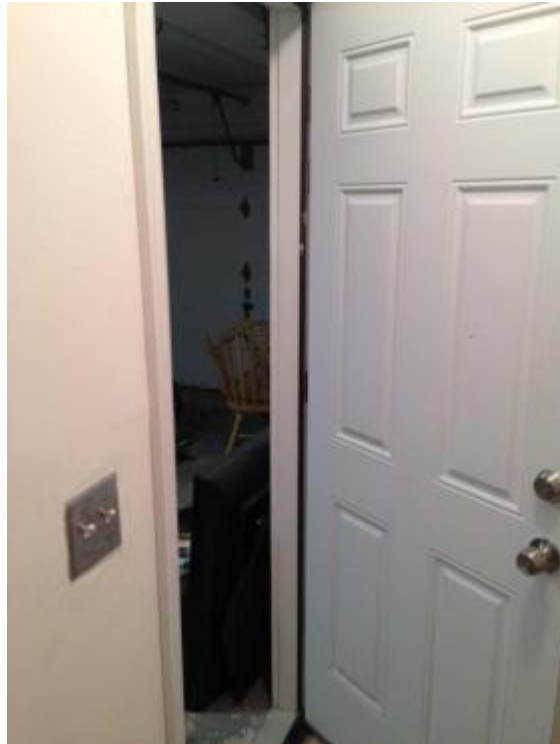

- 11 Lower Level/Garage -
RRE0005446 (36)
Date Taken: 12/19/2014



- 12 Lower Level/Garage -
RRE0005446 (37)
Date Taken: 12/19/2014



- 13 Lower Level/Garage -
RRE0005446 (38)
Date Taken: 12/19/2014




- 14 Lower Level/Garage -
RRE0005446 (39)
Date Taken: 12/19/2014



15 Lower Level/Garage -
RRE0005446 (40)
Date Taken: 12/19/2014



16 Lower Level/Garage -
RRE0005446 (41)
Date Taken: 12/19/2014

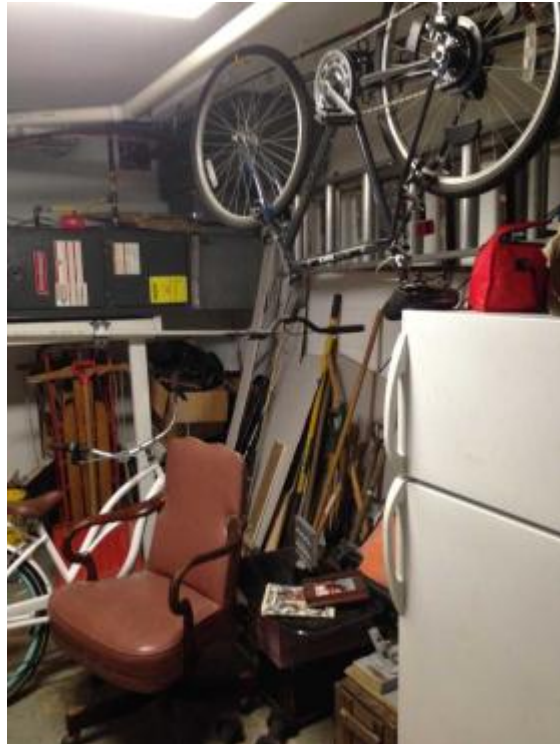


17 Lower Level/Garage -
RRE0005446 (42)
Date Taken: 12/19/2014



18 Lower Level/L/R 0 - RRE0005446
(8)
Date Taken: 12/19/2014




19 Lower Level/L/R 0 - RRE0005446
(9)
Date Taken: 12/19/2014

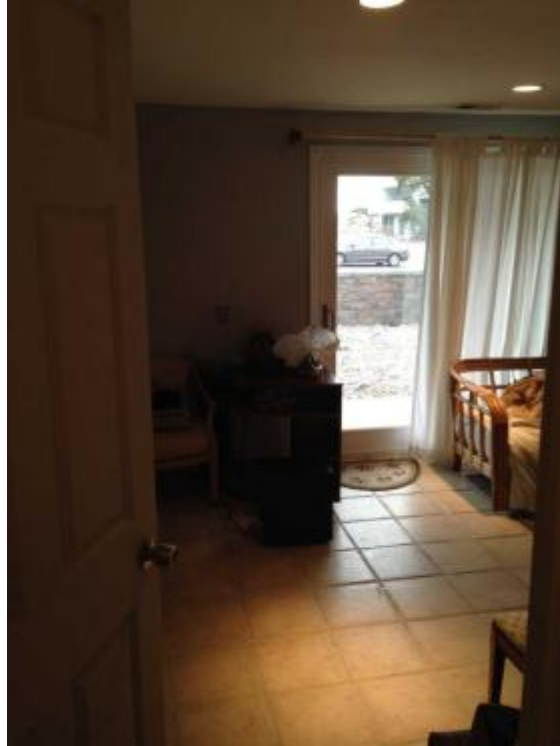


20 Lower Level/L/R 0 - RRE0005446
(10)
Date Taken: 12/19/2014




- 21 Lower Level/L/R 0 - RRE0005446
(11)
Date Taken: 12/19/2014

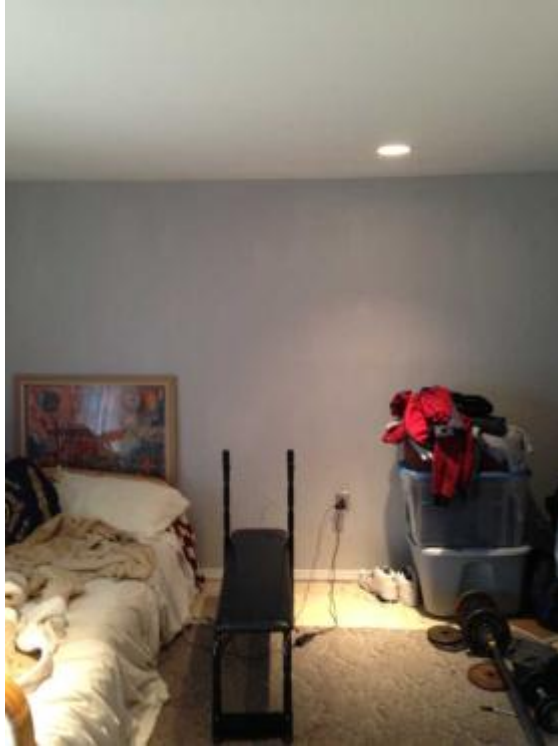

- 22 Lower Level/L/R 0 - RRE0005446
(12)
Date Taken: 12/19/2014

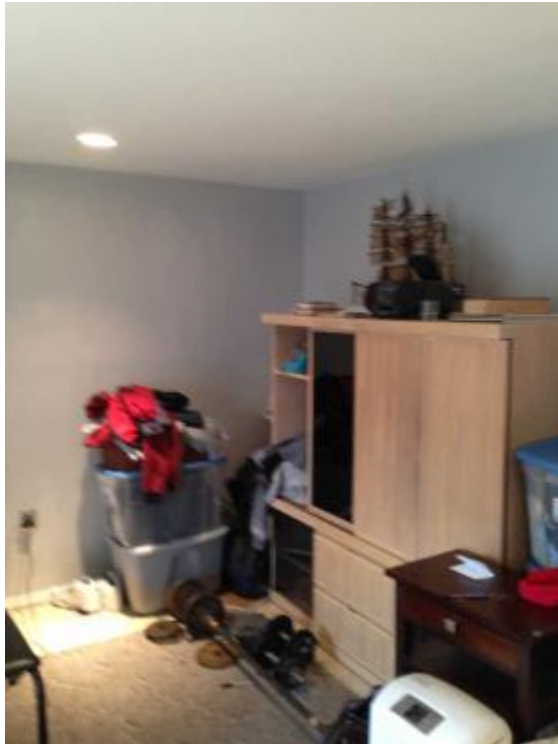

23 Lower Level/L/R 0 - RRE0005446
(13)
Date Taken: 12/19/2014

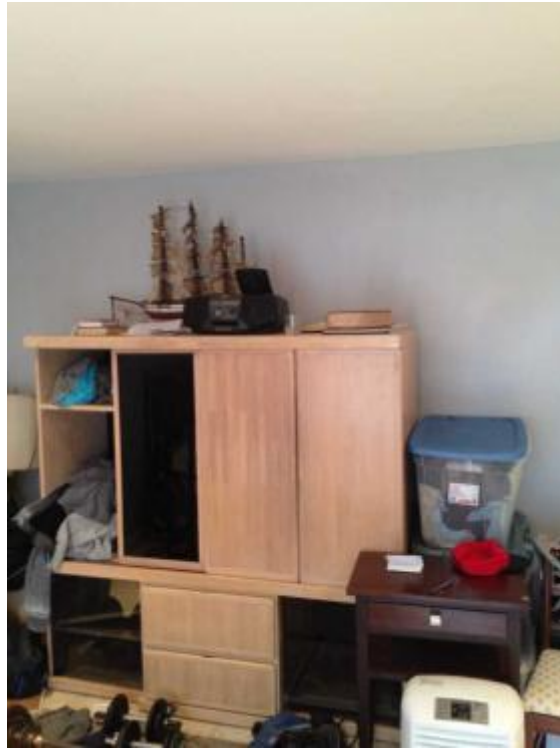


24 Lower Level/L/R 0 - RRE0005446
(14)
Date Taken: 12/19/2014




- 25 Lower Level/L/R 0 - RRE0005446
(15)
Date Taken: 12/19/2014




- 26 Lower Level/L/R 0 - RRE0005446
(18)
Date Taken: 12/19/2014

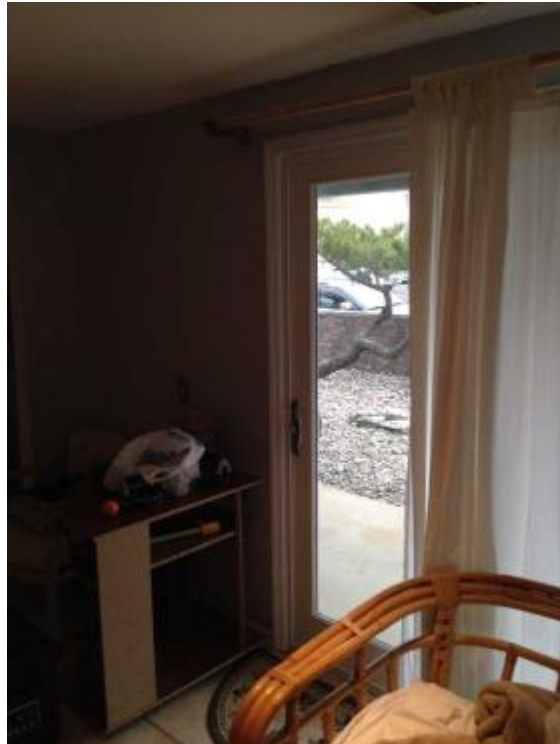

27 Lower Level/W/D - RRE0005446
(16)
Date Taken: 12/19/2014

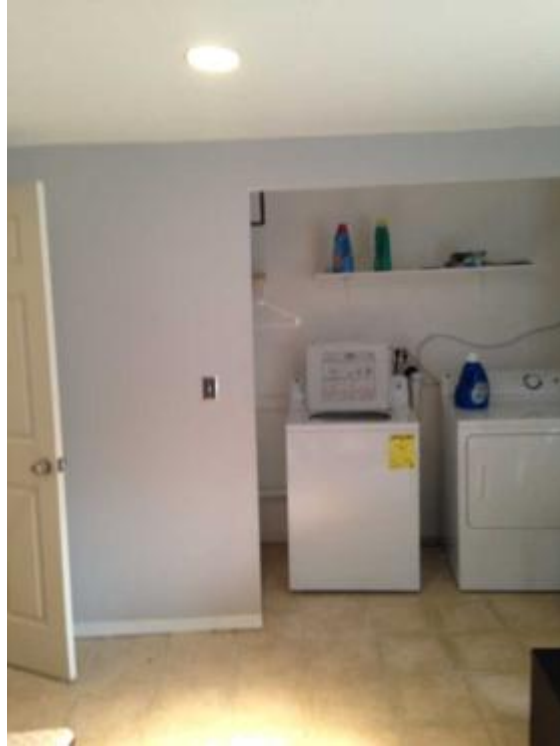


28 Lower Level/W/D - RRE0005446
(17)
Date Taken: 12/19/2014

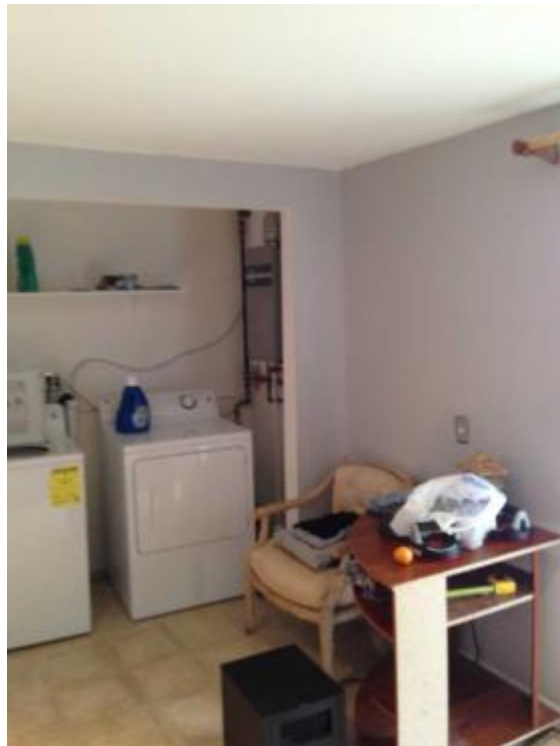

29 Lower Level/W/D - RRE0005446
(19)
Date Taken: 12/19/2014



30 Lower Level/hall 0 - RRE0005446
(25)
Date Taken: 12/19/2014

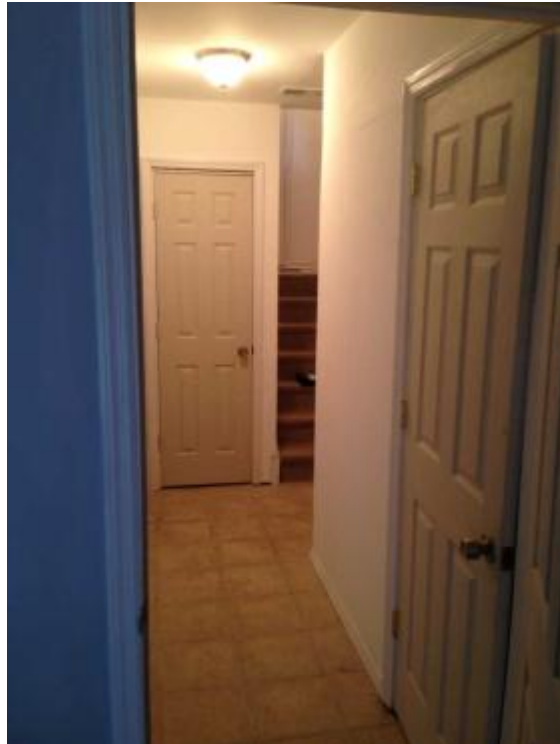


31 Lower Level/hall 0 - RRE0005446
(32)
Date Taken: 12/19/2014



32 Lower Level/Stairs - RRE0005446
(33)
Date Taken: 12/19/2014



33 Lower Level/Stairs - RRE0005446
(34)
Date Taken: 12/19/2014

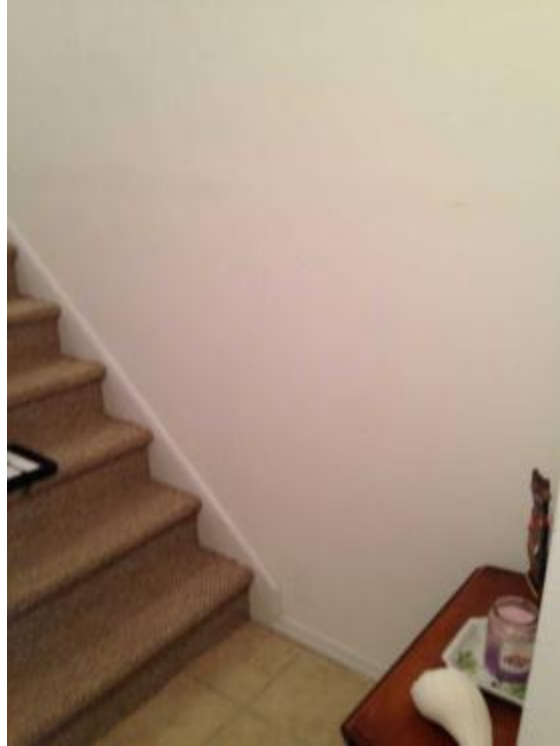

34 Lower Level/Stairs - RRE0005446
(108)
Date Taken: 12/19/2014



35 Lower Level/Stairs - RRE0005446
(109)
Date Taken: 12/19/2014



36 Lower Level/bath 0 - RRE0005446
(26)
Date Taken: 12/19/2014



37 Lower Level/bath 0 - RRE0005446
(27)
Date Taken: 12/19/2014



38 Lower Level/bath 0 - RRE0005446
(28)
Date Taken: 12/19/2014



39 Lower Level/bath 0 - RRE0005446
(29)
Date Taken: 12/19/2014




40 Lower Level/bath 0 - RRE0005446
(30)
Date Taken: 12/19/2014



41 Lower Level/bath 0 - RRE0005446
(31)
Date Taken: 12/19/2014




42 Main Level/D/R - RRE0005446
(100)
Date Taken: 12/19/2014

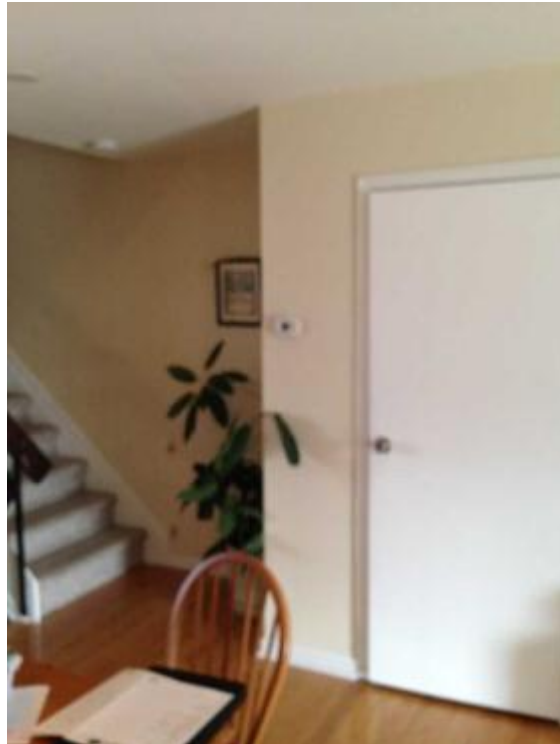

43 Main Level/D/R - RRE0005446
(101)
Date Taken: 12/19/2014



44 Main Level/D/R - RRE0005446
(102)
Date Taken: 12/19/2014

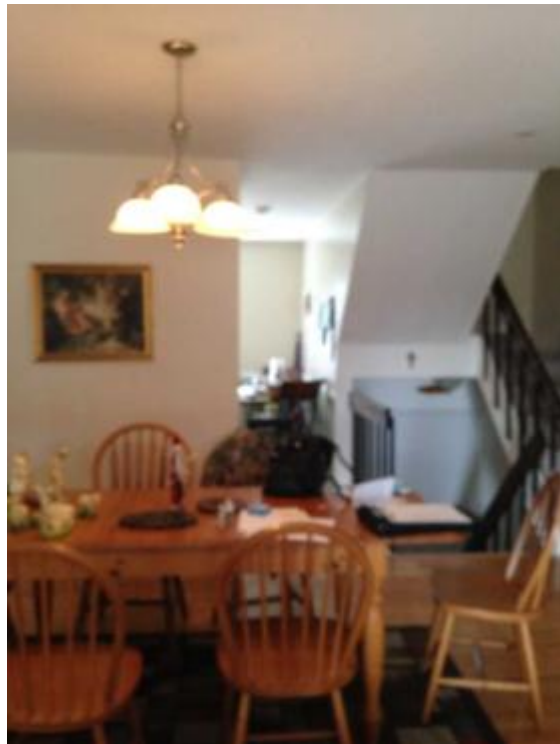

45 Main Level/D/R - RRE0005446
(103)
Date Taken: 12/19/2014



46 Main Level/D/R - RRE0005446
(104)
Date Taken: 12/19/2014



- 47 Main Level/D/R - RRE0005446
(90)
Date Taken: 12/19/2014



- 48 Main Level/D/R - RRE0005446
(91)
Date Taken: 12/19/2014




49 Main Level/D/R - RRE0005446
(92)
Date Taken: 12/19/2014



50 Main Level/D/R - RRE0005446
(93)
Date Taken: 12/19/2014




- 51 Main Level/D/R - RRE0005446
(110)
Date Taken: 12/19/2014

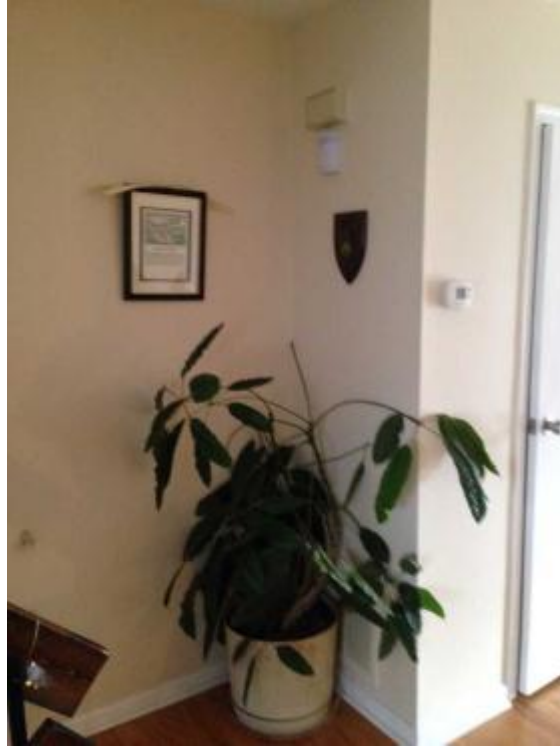


- 52 Main Level/L/R 1 - RRE0005446
(94)
Date Taken: 12/19/2014




53 Main Level/L/R 1 - RRE0005446
(95)
Date Taken: 12/19/2014

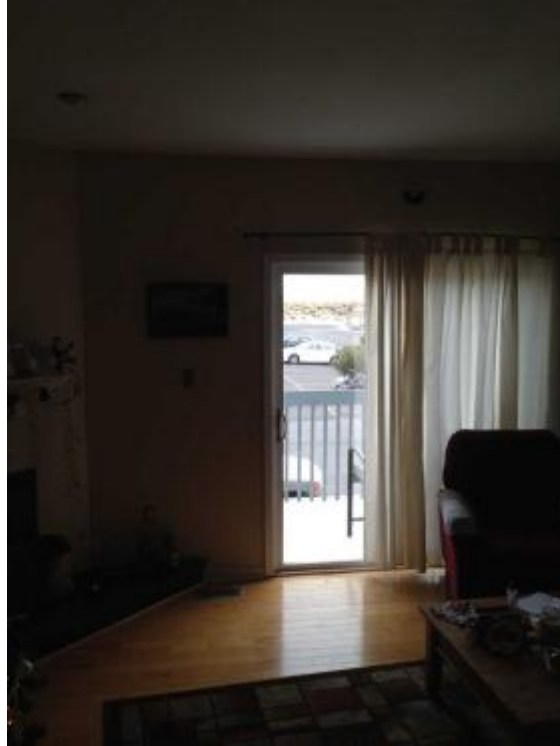

54 Main Level/L/R 1 - RRE0005446
(96)
Date Taken: 12/19/2014

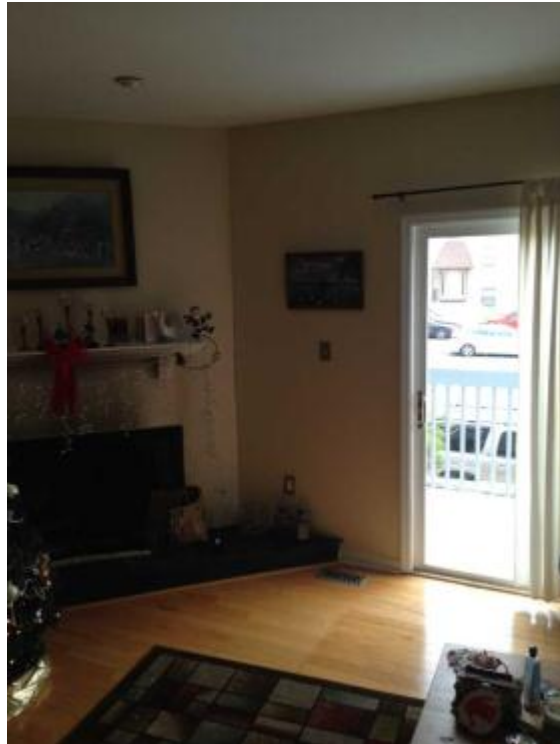

55 Main Level/L/R 1 - RRE0005446
(97)
Date Taken: 12/19/2014

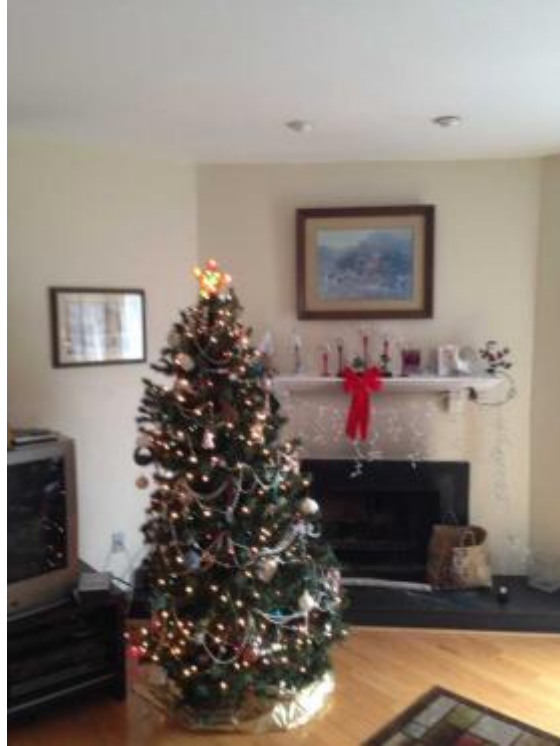


56 Main Level/L/R 1 - RRE0005446
(98)
Date Taken: 12/19/2014




57 Main Level/L/R 1 - RRE0005446
(99)
Date Taken: 12/19/2014



58 Main Level/Kitchen -
RRE0005446 (1)
Date Taken: 12/19/2014

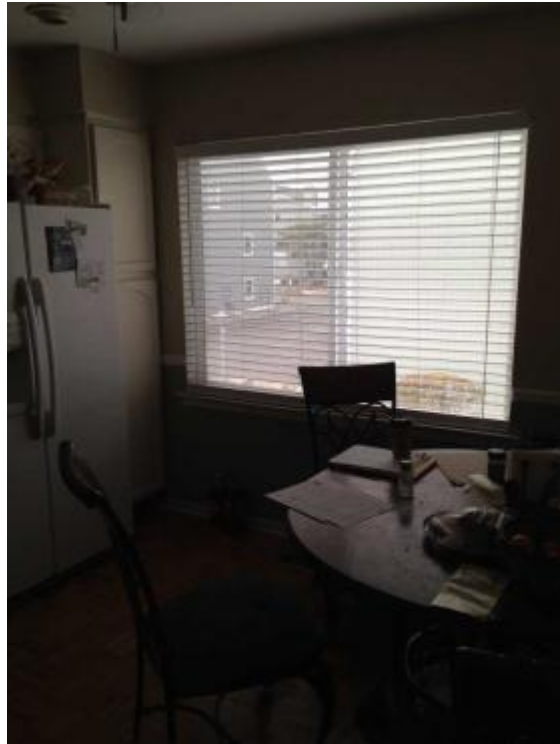

59 Main Level/Kitchen -
RRE0005446 (2)
Date Taken: 12/19/2014

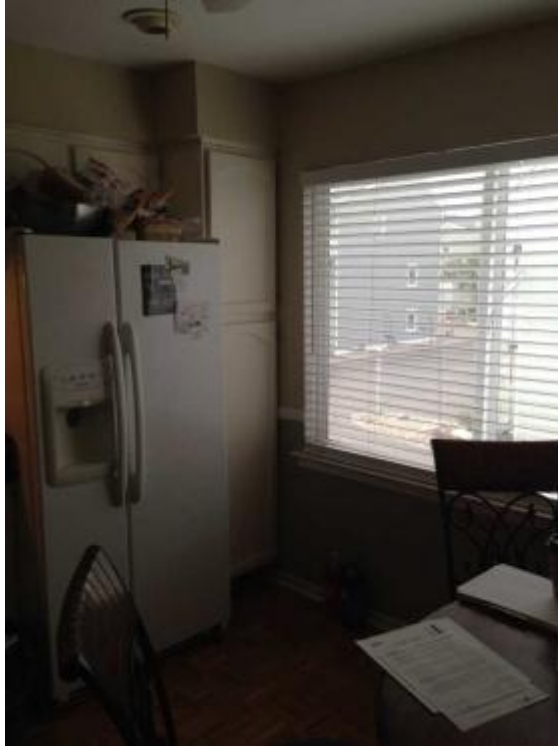


60 Main Level/Kitchen -
RRE0005446 (3)
Date Taken: 12/19/2014



- 61 Main Level/Kitchen -
RRE0005446 (4)
Date Taken: 12/19/2014




- 62 Main Level/Kitchen -
RRE0005446 (5)
Date Taken: 12/19/2014

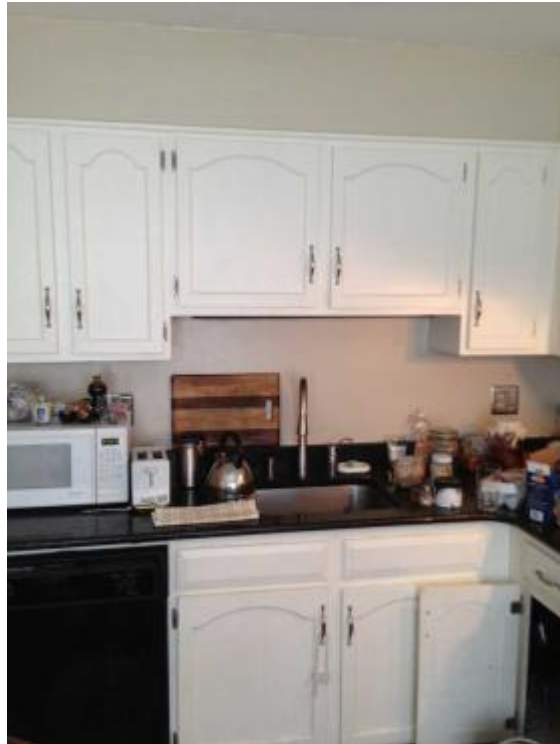

63 Main Level/Kitchen -
RRE0005446 (6)
Date Taken: 12/19/2014




64 Main Level/Kitchen -
RRE0005446 (111)
Date Taken: 12/19/2014

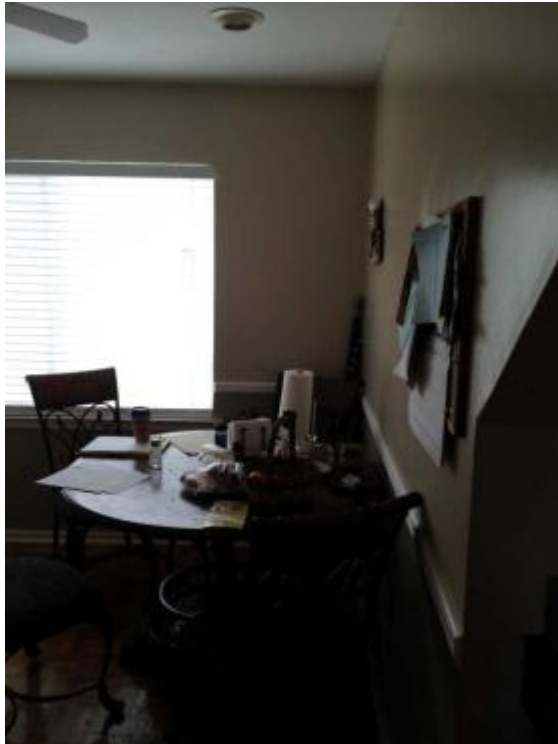

65 Main Level/Stairs - RRE0005446
(43)
Date Taken: 12/19/2014



66 Main Level/Stairs - RRE0005446
(44)
Date Taken: 12/19/2014

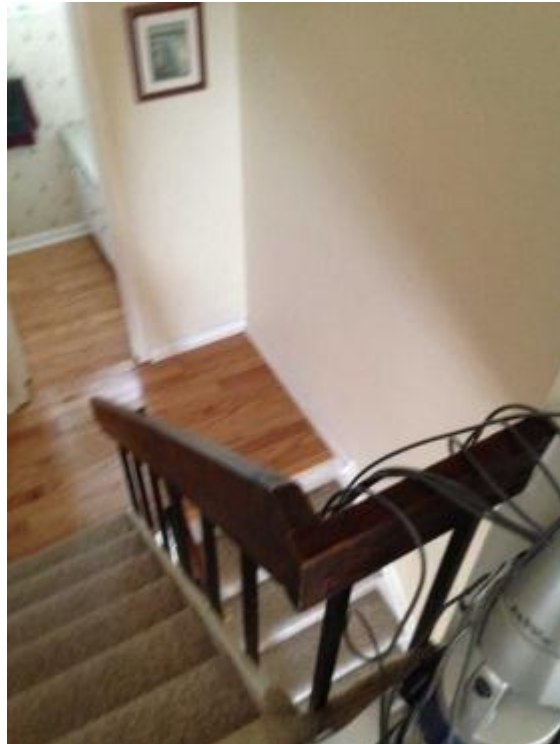


67 Main Level/Stairs - RRE0005446
(86)
Date Taken: 12/19/2014



68 Main Level/Stairs - RRE0005446
(87)
Date Taken: 12/19/2014



69 Main Level/Stairs - RRE0005446
(88)
Date Taken: 12/19/2014

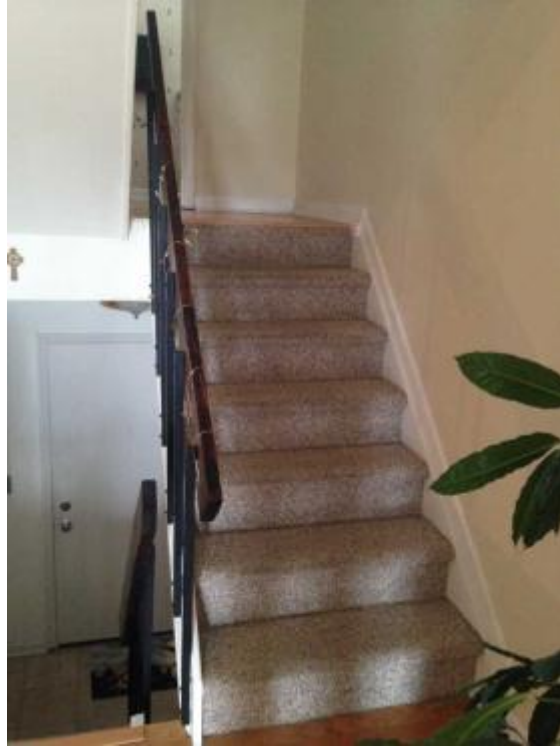

70 Main Level/Stairs - RRE0005446
(89)
Date Taken: 12/19/2014




71 Main Level/bath 1 - RRE0005446
(81)
Date Taken: 12/19/2014



72 Main Level/bath 1 - RRE0005446
(82)
Date Taken: 12/19/2014



73 Main Level/bath 1 - RRE0005446
(83)
Date Taken: 12/19/2014

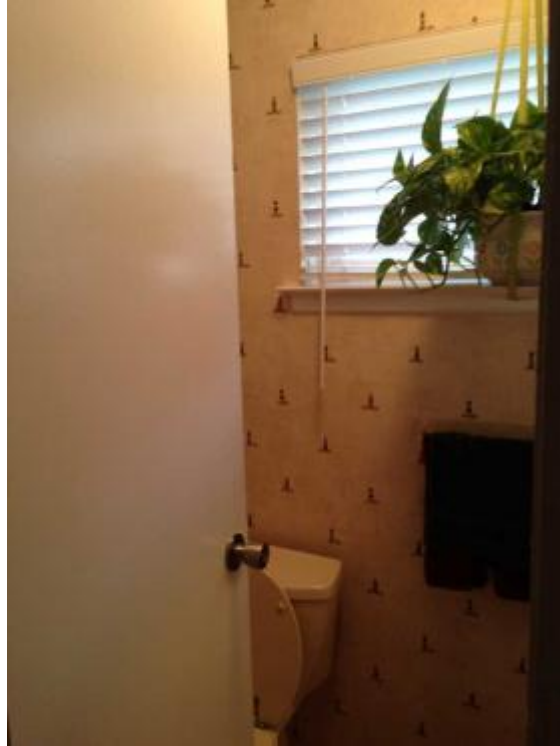


74 Main Level/bath 1 - RRE0005446
(84)
Date Taken: 12/19/2014




75 Main Level/bath 1 - RRE0005446
(85)
Date Taken: 12/19/2014




76 Upper Level/hall 2 - RRE0005446
(45)
Date Taken: 12/19/2014

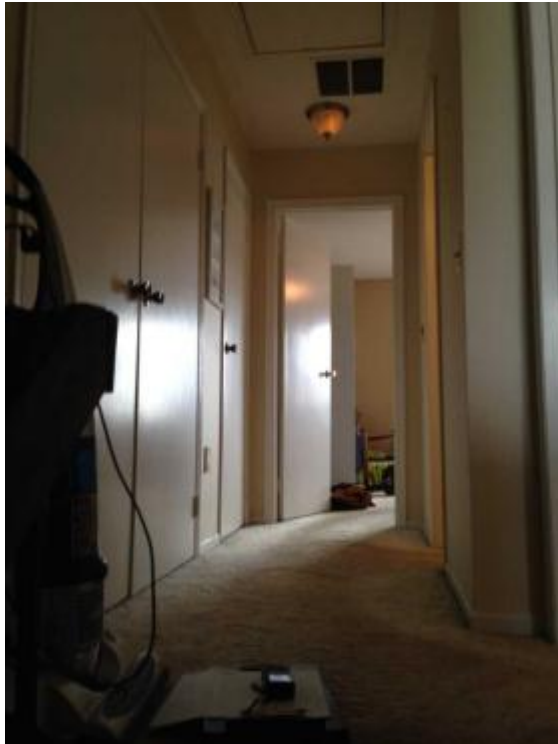

77 Upper Level/hall 2 - RRE0005446
(46)
Date Taken: 12/19/2014

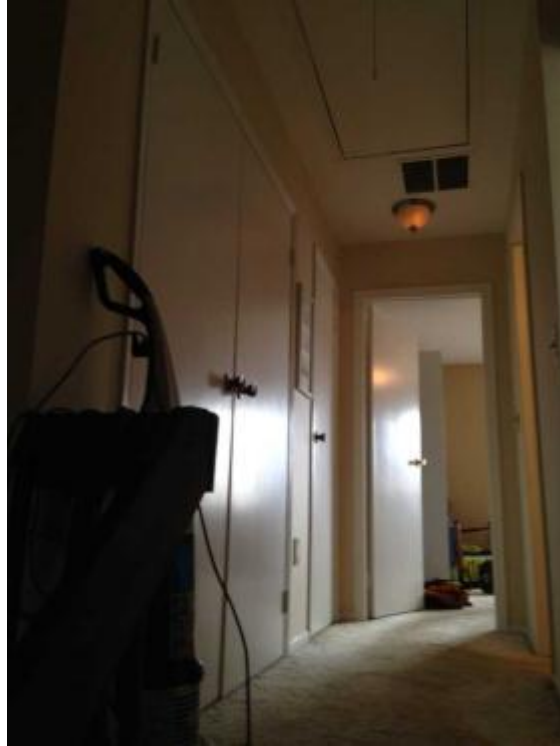

78 Upper Level/hall 2 - RRE0005446
(52)
Date Taken: 12/19/2014

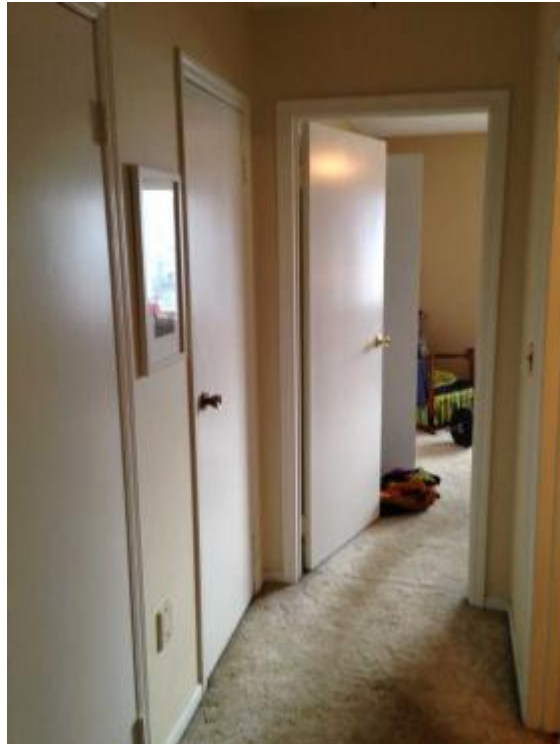


79 Upper Level/hall 2 - RRE0005446
(53)
Date Taken: 12/19/2014




80 Upper Level/Master Bedroom -
RRE0005446 (65)
Date Taken: 12/19/2014



81 Upper Level/Master Bedroom -
RRE0005446 (66)
Date Taken: 12/19/2014

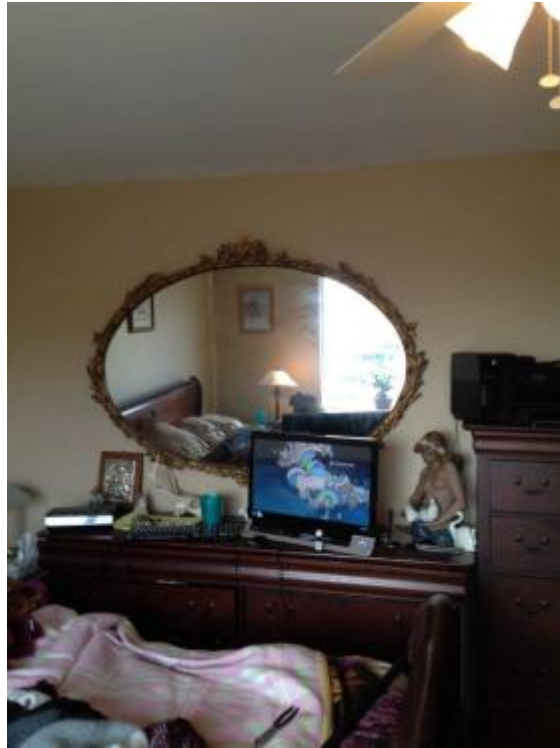

82 Upper Level/Master Bedroom -
RRE0005446 (67)
Date Taken: 12/19/2014

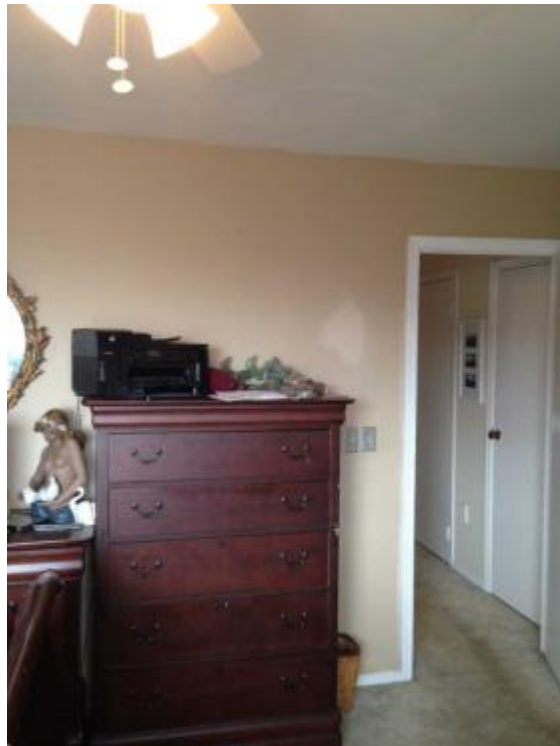


83 Upper Level/Master Bedroom -
RRE0005446 (68)
Date Taken: 12/19/2014



84 Upper Level/Master Bedroom -
RRE0005446 (69)
Date Taken: 12/19/2014




85 Upper Level/Master Bedroom -
RRE0005446 (70)
Date Taken: 12/19/2014

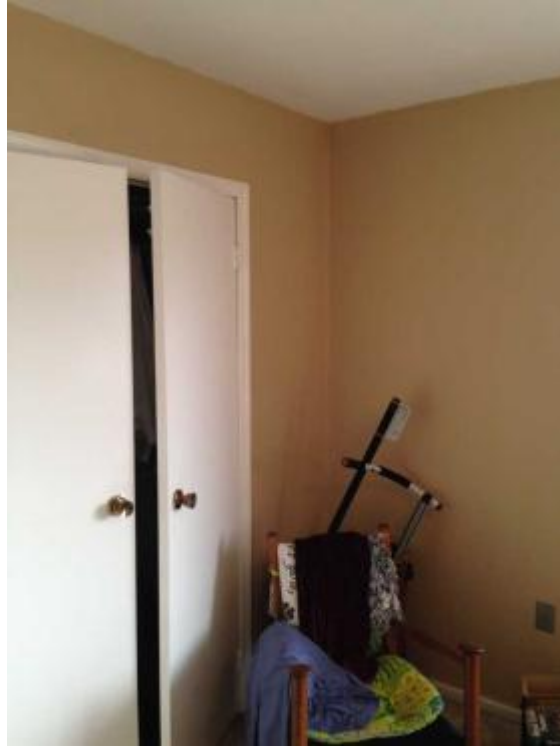

86 Upper Level/Master Bedroom -
RRE0005446 (61)
Date Taken: 12/19/2014




87 Upper Level/Master Bedroom -
RRE0005446 (62)
Date Taken: 12/19/2014

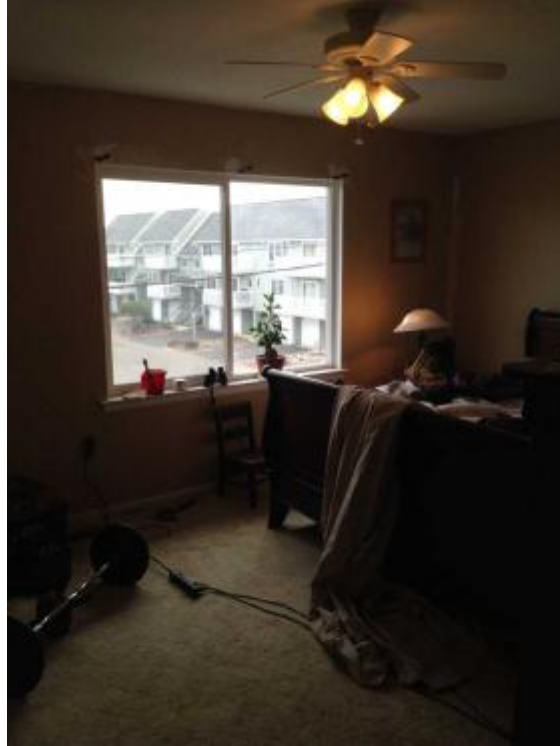

88 Upper Level/Master Bedroom -
RRE0005446 (63)
Date Taken: 12/19/2014




- 89 Upper Level/Master Bedroom -
RRE0005446 (64)
Date Taken: 12/19/2014

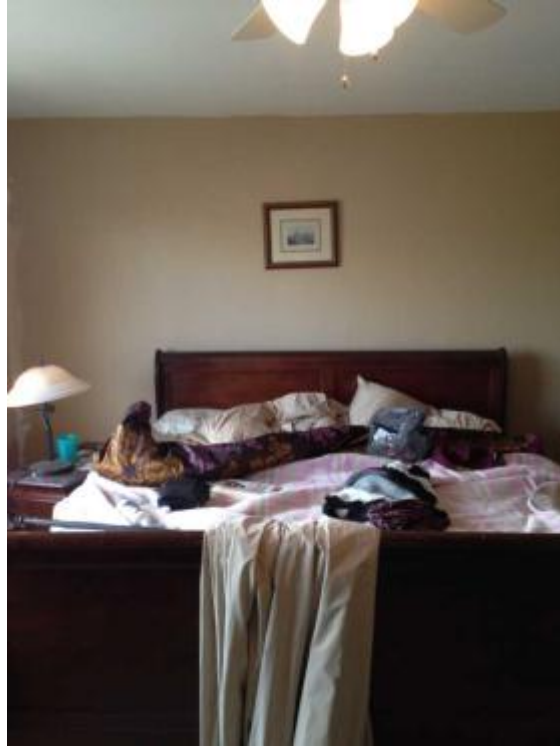


- 90 Upper Level/bed 2 - RRE0005446
(79)
Date Taken: 12/19/2014



91 Upper Level/bed 2 - RRE0005446
(80)
Date Taken: 12/19/2014

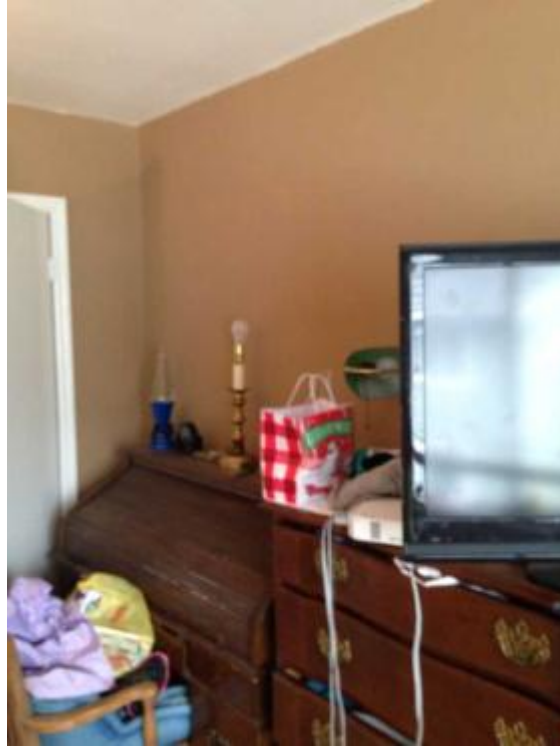


92 Upper Level/bed 2 - RRE0005446
(71)
Date Taken: 12/19/2014

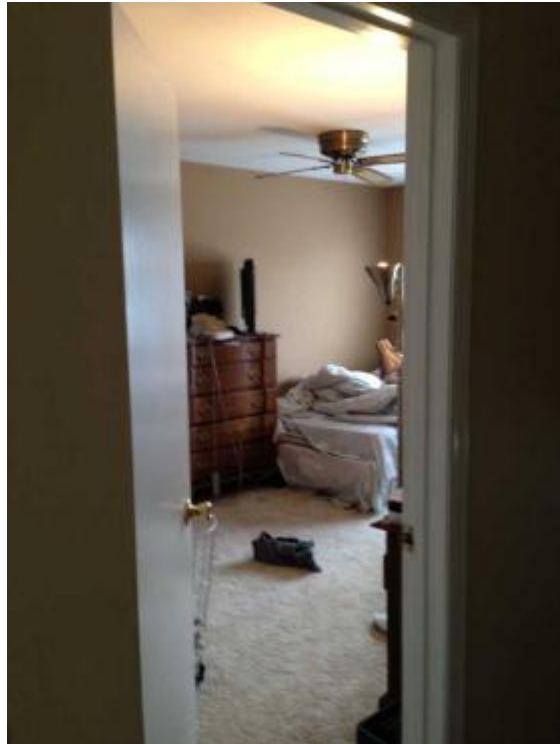

93 Upper Level/bed 2 - RRE0005446
(72)
Date Taken: 12/19/2014



94 Upper Level/bed 2 - RRE0005446
(73)
Date Taken: 12/19/2014

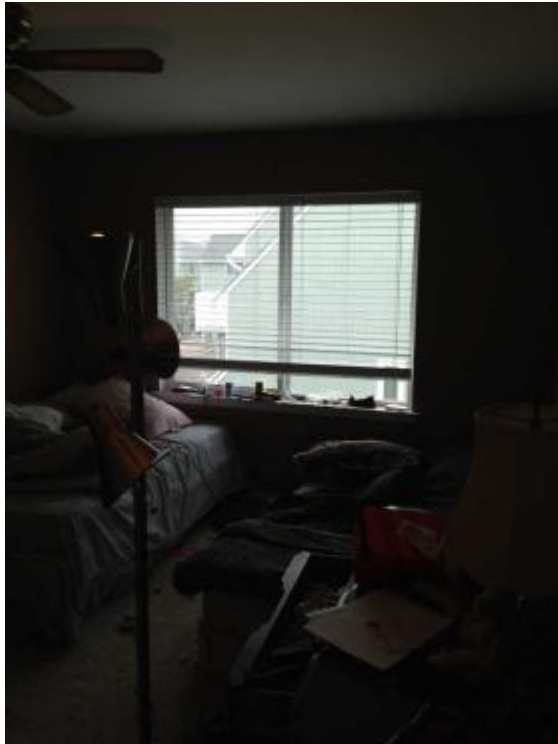


95 Upper Level/bed 2 - RRE0005446
(74)
Date Taken: 12/19/2014




96 Upper Level/bed 2 - RRE0005446
(75)
Date Taken: 12/19/2014



97 Upper Level/bed 2 - RRE0005446
(76)
Date Taken: 12/19/2014

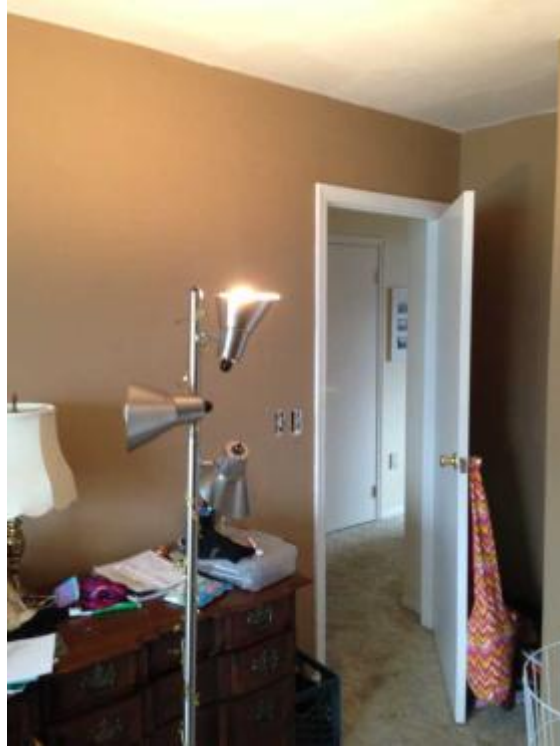

98 Upper Level/bed 2 - RRE0005446
(78)
Date Taken: 12/19/2014

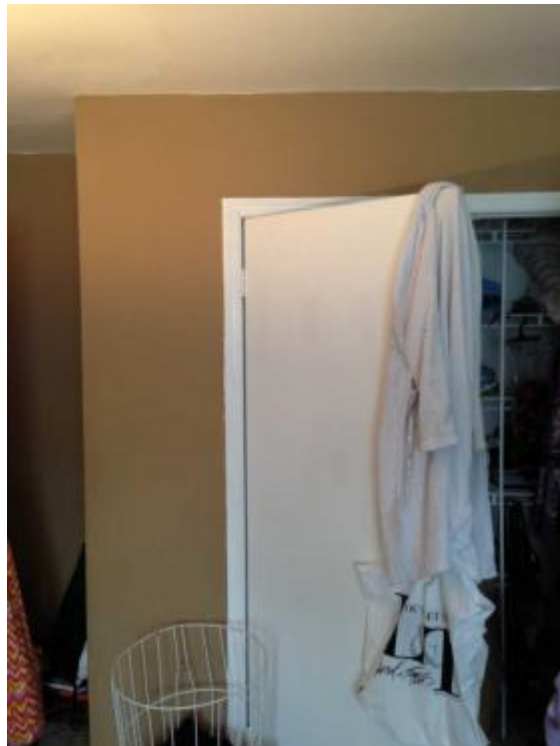

99 Upper Level/bath 2 - RRE0005446
(56)
Date Taken: 12/19/2014



100 Upper Level/bath 2 - RRE0005446
(57)
Date Taken: 12/19/2014




101 Upper Level/bath 2 - RRE0005446
(58)
Date Taken: 12/19/2014



102 Upper Level/bath 2 - RRE0005446
(59)
Date Taken: 12/19/2014



105 Upper Level/bath 2 - RRE0005446
(55)
Date Taken: 12/19/2014

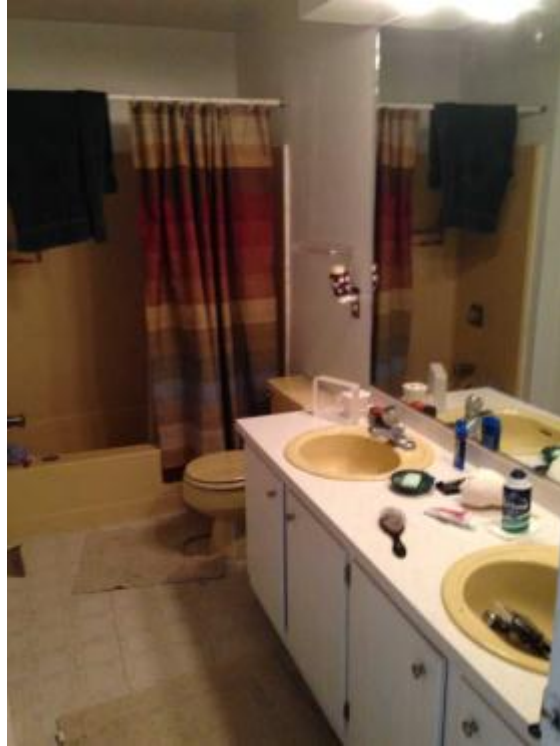

106 Roof - RRE0005446 (47)
Date Taken: 12/19/2014



107 Roof - RRE0005446 (48)
Date Taken: 12/19/2014



108 Roof - RRE0005446 (49)
Date Taken: 12/19/2014




109 Roof - RRE0005446 (50)
Date Taken: 12/19/2014




110 Roof - RRE0005446 (51)
Date Taken: 12/19/2014




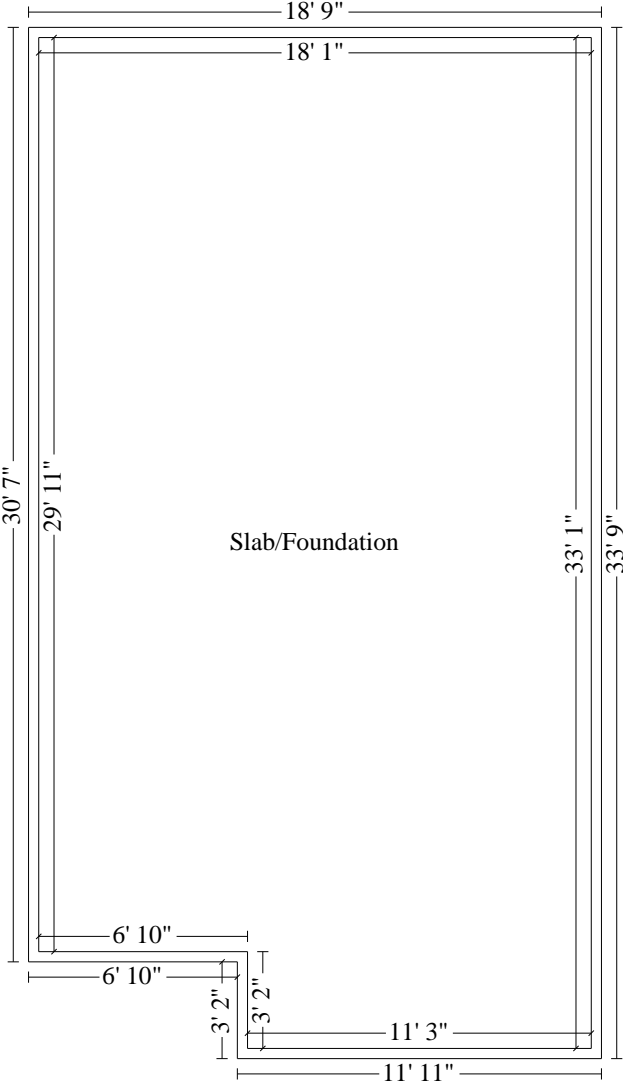



Foundation

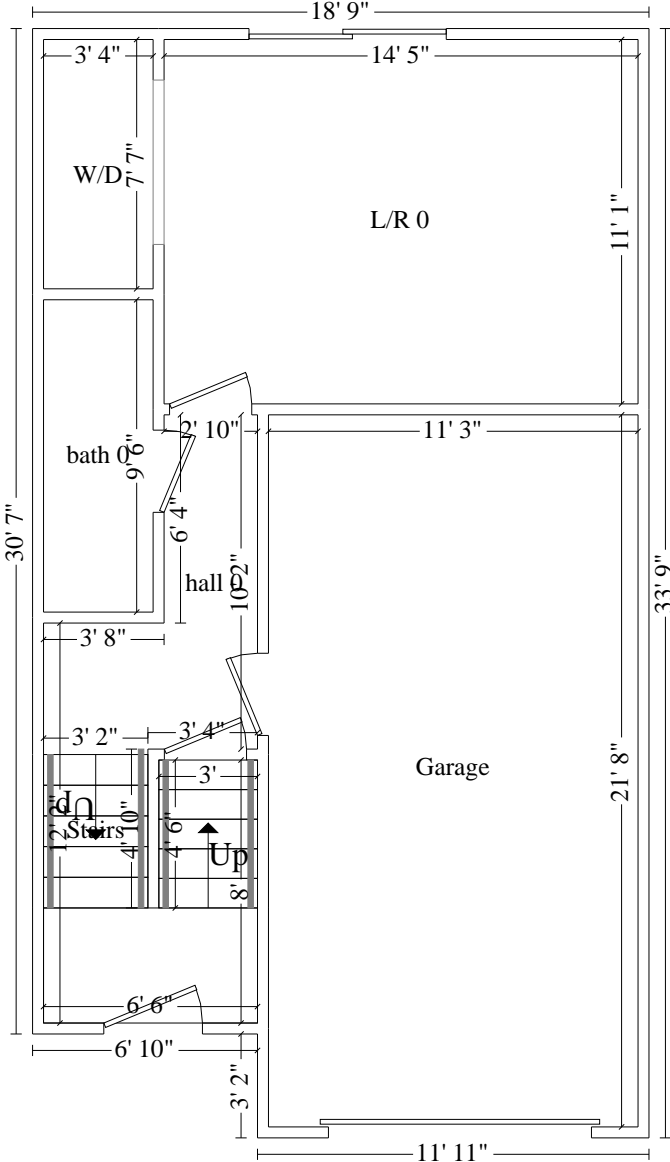


Lower Level

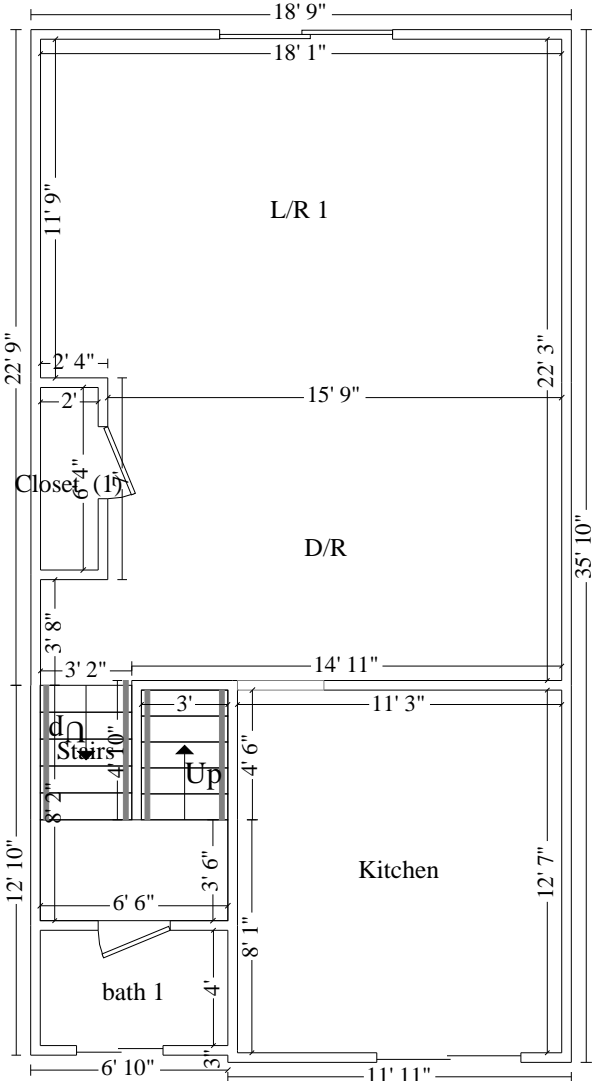

Main Level



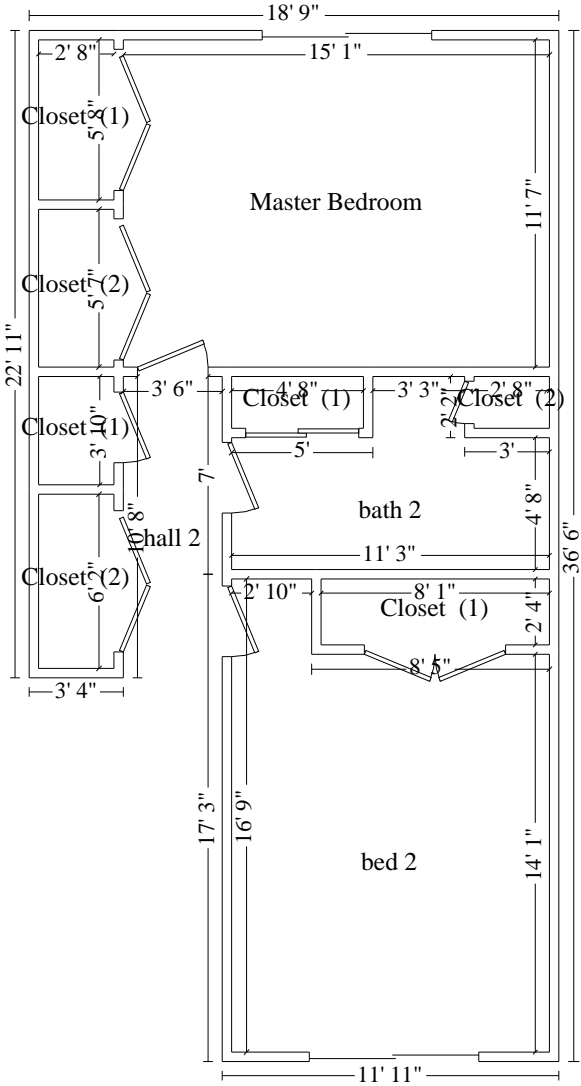

Upper Level

