


TYPE III BARRICADE - FRONT VIEW

- NOTES:
1. THE 225 x 1 200 MM, OR 300 MM MAX. x 1 200 MM BARRICADE RAILS SHALL BE FABRICATED FROM 3 MM MAX. PLASTIC SHEETING AND SHALL BE ATTACHED, 4 PER RAIL, WITH 25 MM NO. 14 PAN HEAD METAL SCREWS OR PLASTIC RIVETS. ALL CORNERS SHALL BE ROUNDED.
 2. ORANGE AND SILVER (WHITE) STRIPES SHALL BE RETROREFLECTIVE SHEETING, ASTM D 4956 TYPE III, AS SHOWN FOR CONSTRUCTION SIGNS. ALTERNATE ORANGE AND SILVER (WHITE) STRIPES 150 MM WIDE SLOPING DOWNWARD AT AN ANGLE OF 45 DEGREES IN THE DIRECTION TRAFFIC IS TO PASS.
 3. IF NECESSARY, THE SANDBAGS SHALL BE FABRICATED AND PLACED ACCORDING TO THE MANUFACTURE'S RECOMMENDATION.
 4. THE FRAMING FOR BARRICADE PANELS SHALL BE NCHRP-350 CRASHED TESTED AND FHWA APPROVED. SEE SPECIFICATION SUBSECTION 617.03.

BREAKAWAY BARRICADES

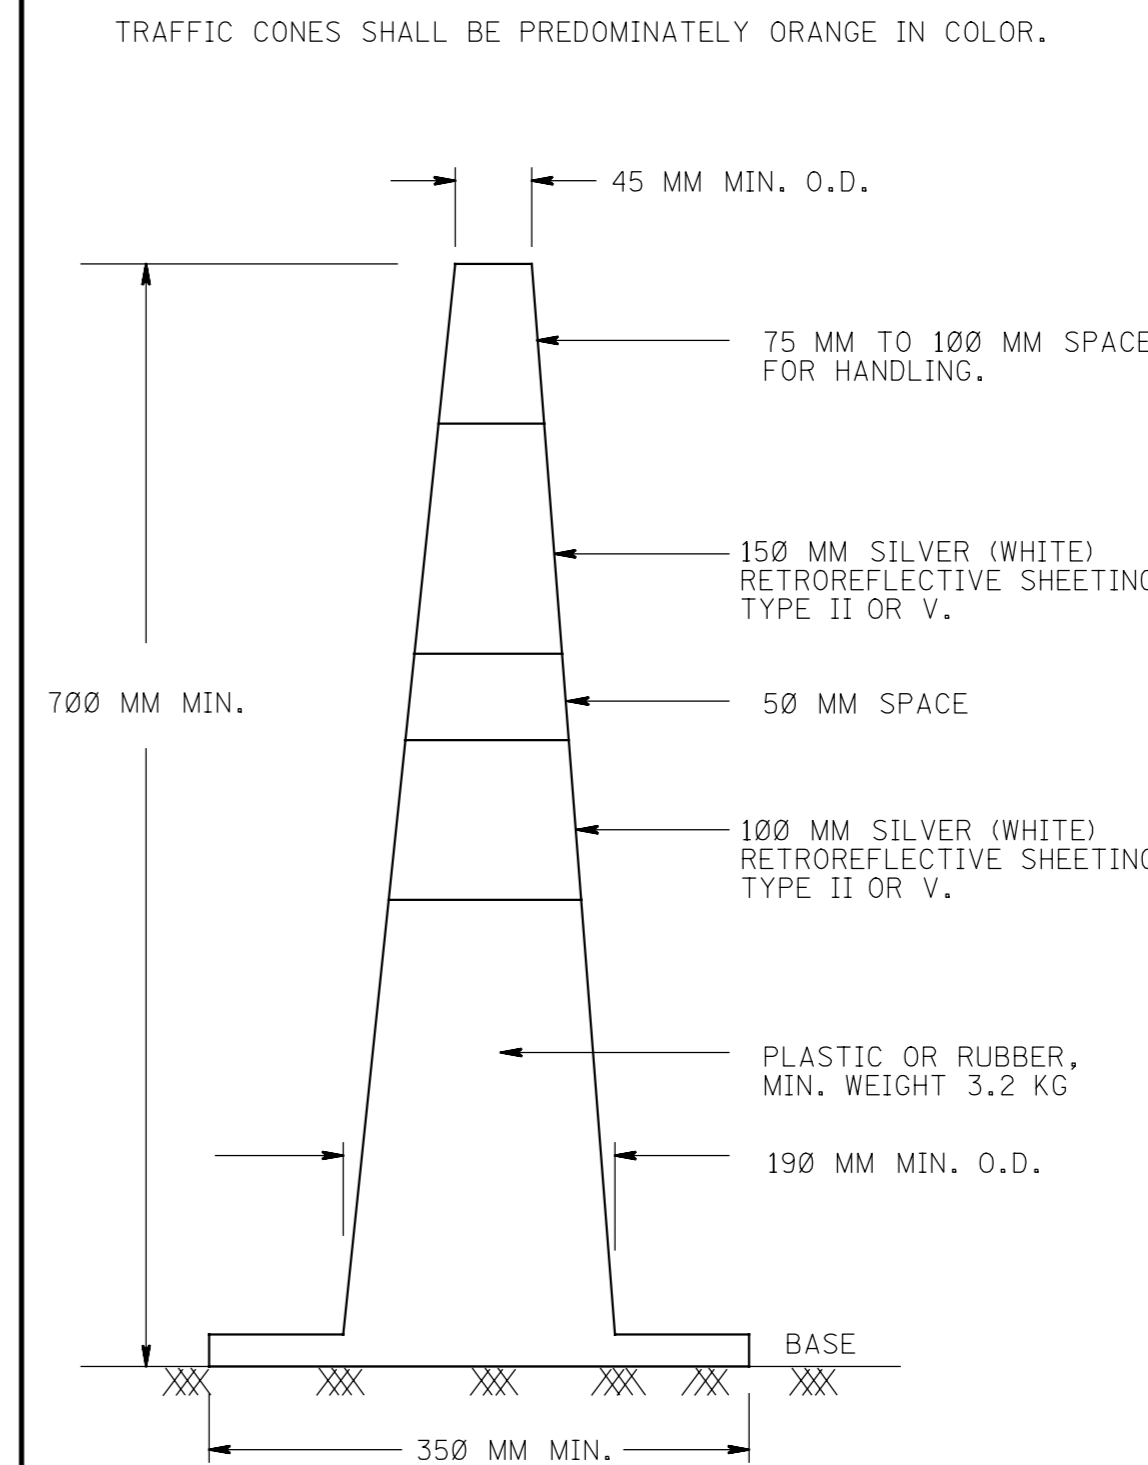

BASES MAY BE OF BREAKAWAY BALLASTED TYPE.

MINOR MANUFACTURER'S VARIATIONS MAY BE ACCEPTABLE
UPON APPROVAL OF THE ENGINEER.

TRAFFIC CONES

CD-617-1.

NOTE: ALL DIMENSIONS SHOWN ON THIS SHEET ARE
IN MILLIMETERS UNLESS OTHERWISE NOTED.

TRAFFIC CONTROL DEVICES

N.T.S.

CD-617-1

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS